

CLIP - ON




Product Description:

- Opening angle: 110°
- Diameter of hinge cup: 35mm
- Cup depth: 11.5mm
- Drilling dimension on the door: 3~7mm
- Range for door thickness: 16~22mm
- Material: Steel
- Finish: Nickel plated, Titanium Black

Installation Dimensions:

- H= Height of mounting plate
- K= Distance from edge of door to the edge of cup
- D= Required cover distance on the side panel
- A= Gap between door and side panel
- L= Distance from inside edge of door to the outside edge of side panel
- T= Door thickness

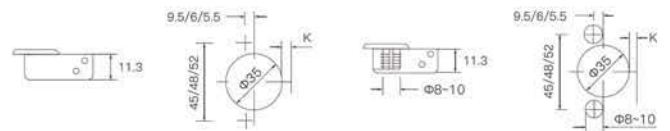

Formula and the parameters in the table below can be used for left, right and side adjustment

Figures needed of both - drilling holes "K" on the door and height "H" of the mounting plate to solve


Options of screw and dowels

Euro screw 6.4mm Screw no E	M8 dowel 8mm Dowel no D8	M10 dowel 10mm Dowel no D10	Easy dowel 8mm Dowel no DE
--------------------------------	-----------------------------	--------------------------------	-------------------------------

Full overlay



SCH303525/CP



$H=15+K-D$


Coverage calculation table

D \ K	3	4	5	6	7
0	18	19	20	21	22
2	16	17	18	19	20
4	14	15	16	17	18

Half Overlay



SCH303526/CP



$H=5+K-D$


Coverage calculation table

D \ K	3	4	5	6	7
0	8	9	10	11	12
2	6	7	8	9	10
4	4	5	6	7	8

Inset



SCH303527/CP



$H=A+K-3$

Coverage calculation table

A \ K	3	4	5	6	7
0	0	-1	-2	-3	-4
2	2	1	0	-1	-2
4	4	3	2	1	0