

SLIDE - ON




Product Description:

- Opening angle: 165°
- Diameter of hinge cup: 35mm
- Cup hole distance: 48mm/52mm
- Dimension of the door: 3~7mm
- Drilling door thickness: 16~26mm
- Material: Steel
- Finish: Nickel plated

Installation Dimensions:

- H= Height of mounting plate
- K= Distance from edge of door to the edge of cup
- D= Required cover distance on the side panel
- A= Gap between door and side panel
- L= Distance from inside edge of door to the outside edge of side panel
- T= Door thickness

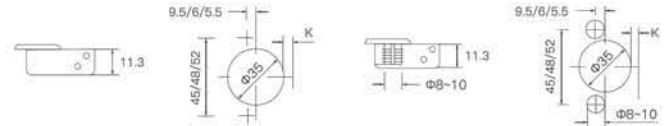

Options of screw and dowels

Euro screw 6.4mm Screw no E	M8 dowel 8mm Dowel no D8	M10 dowel 10mm Dowel no D10	Easy dowel 8mm Dowel no DE
---------------------------------------	------------------------------------	---------------------------------------	--------------------------------------


Formula and the parameters in the table below can be used for left, right and side adjustment

Figures needed of both - drilling holes "K" on the door and height "H" of the mounting plate to solve

Full overlay



H312165



$H=13+K-D$


Coverage calculation table

D \ K	3	4	5	6	7	
H	0	16	17	18	19	20
2	14	15	16	17	18	
4	12	13	14	15	16	

Half Overlay



H312166



$H=4+K-D$


Coverage calculation table

D \ K	3	4	5	6	7	
H	0	7	8	9	10	11
2	5	6	7	8	9	
4	3	4	5	6	7	

Inset



H312167



$H=A+K-4$

Coverage calculation table

A \ K	3	4	5	6	7	
H	0	1	0	-1	-2	-3
2	3	2	1	0	-1	