



Product Description:

SLIDE - ON


- Opening angle: +30°, +45°, +90°
- Diameter of hinge cup: 35mm
- Cup depth: 11.5mm
- Drilling dimension on the door: 4~7mm
- Range for door thickness: 16~22mm
- Material: Steel
- Finish: Nickel plated

Installation Dimensions:

- H= Height of mounting plate
- K= Distance from edge of door to the edge of cup
- D= Required cover distance on the side panel
- A= Gap between door and side panel
- L= Distance from inside edge of door to the outside edge of side panel
- T= Door thickness

Options of screw and dowels

Euro screw 6.4mm Screw no E	M8 dowel 8mm Dowel no D8	M10 dowel 10mm Dowel no D10	Easy dowel 8mm Dowel no DE
---------------------------------------	------------------------------------	---------------------------------------	--------------------------------------

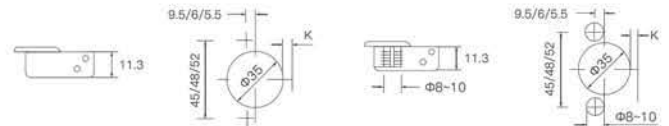


Formula and the parameters in the table below can be used for left, right and side adjustment

Figures needed of both - drilling holes "K" on the door and height "H" of the mounting plate to solve

30° Angle



SCH3933480/30



H=0
D=2.5mm


Table of mounting plate drilling holes-position

H \ K	4	5	6	7				
0	37	2.5	36	3.4	35	4.3	34	5.2
2	37	0.5	36	1.4	35	2.3	34	3.2
4	37	-1.5	36	-0.6	35	0.3	34	1.2
	X				D			

45° Angle



SCH3932480/45



H=0
D=4.5mm


Table of mounting plate drilling holes-position

H \ K	4	5	6	7				
0	37	4.5	36	5.4	35	6.3	34	7.2
2	37	2.5	36	3.4	35	4.3	34	5.2
4	37	0.5	36	1.6	35	2.3	34	3.2
	X				D			

90° Angle



SCH3931480/90



H=0
D=2.8mm

Table of mounting plate drilling holes-position

H \ K	4	5		
0	20	2.8	19	2.8
2	20	0.8	19	0.8
4	20	-1.2	19	-1.2
	X		D	