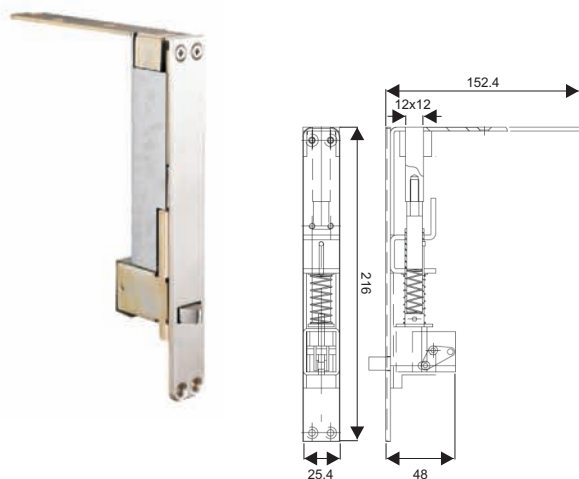


Automatic Flush Bolt


AFB1901 - Timber doors upto 2700mm H x 1219mm W


Material : Stainless Steel

Finishes : SSS

Features : • Non-handed.

- Fully automatic—Inactive door is latched when active door closes, bolts retract when active door is opened.
- Override feature prevents damage to doors or bolts if bolt heads are blocked from entering strikes.
- Bolt head rods are adjustable up to 12.50mm

Options: No. 1901 can be used with DESS550 Dust Proof Strike

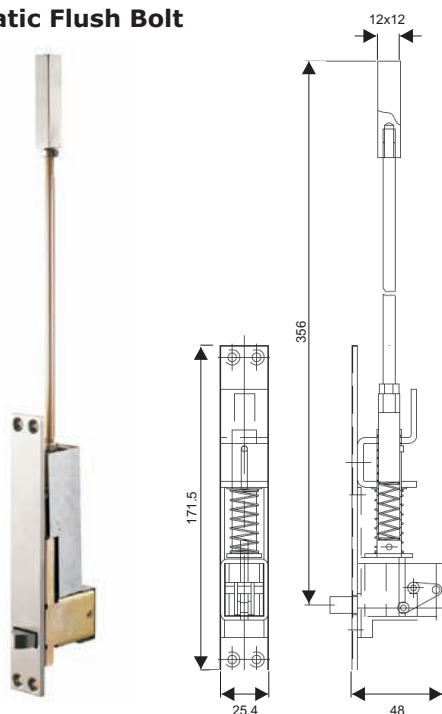Automatic Flush Bolt



AFB1801 - Fire-Rated metal doors upto 2700mm H x 1219mm W

Material : Stainless Steel

Features : • Non-handed.

- Fully automatic—opening active door retracts top and bottom bolts.
- Override feature prevents damage to doors or bolts if bolt heads are blocked from entering strikes.
- Standard rod length - 300mm
- Custom rod lengths available (increment of 150mm)

Options: No. 1801 can be used with the DESS550 Dust Proof Strike

DESS550 - Dust Proof Strike


Material : Brass, Stainless Steel

Finishes : SSS

Features : • Spring-loaded plunger depressed when flush bolt is thrown and returns automatically when flush bolt is retracted.

