




## Bi-Fold Top Stay


### Features:

- Staying angle in any position between 45°~120°
- Door weight (including the handle weight): 7-10 kg
- 3 Dimension fine tuning: Up & down, left & right, forward & backward ± 2.0mm
- Cabinet height: 600~1040mm
- Cabinet width: Below 1200mm
- Minimum interior cabinet depth: 300mm

### Space reserved for installing

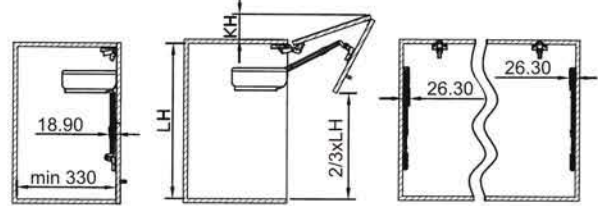

### Positioning hole

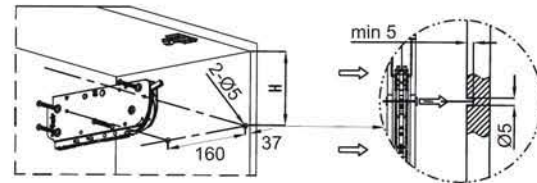

8 x Wood screws Ø4x35mm

### Individually Packed

Item Code	Loading Capacity	Set/ctn
EAFL01-H-A	7-10 Kg	1



## Manual Top Stay

### Features:

- Lapcon stay for upward-opening flap doors
- Lift-assist mechanism for extra light opening
- Door stays in any desired position
- Damper equipped for soft & silent closing at the end
- Slim design and installed location maximizes space inside of cabinet
- Simple installation by aligning body to edge of cabinet
- Recognized by LGA for 40,000 cycles
- Single or pair use allows wide range of door size/weight
- 3 functions on 1 stay - lift-assist, free stop, soft close

### Individually Packed

Item Code	Loading Capacity	Set/ctn
EAYA-127A	4 Kg	1

