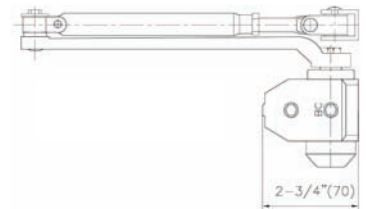
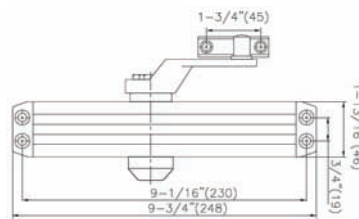
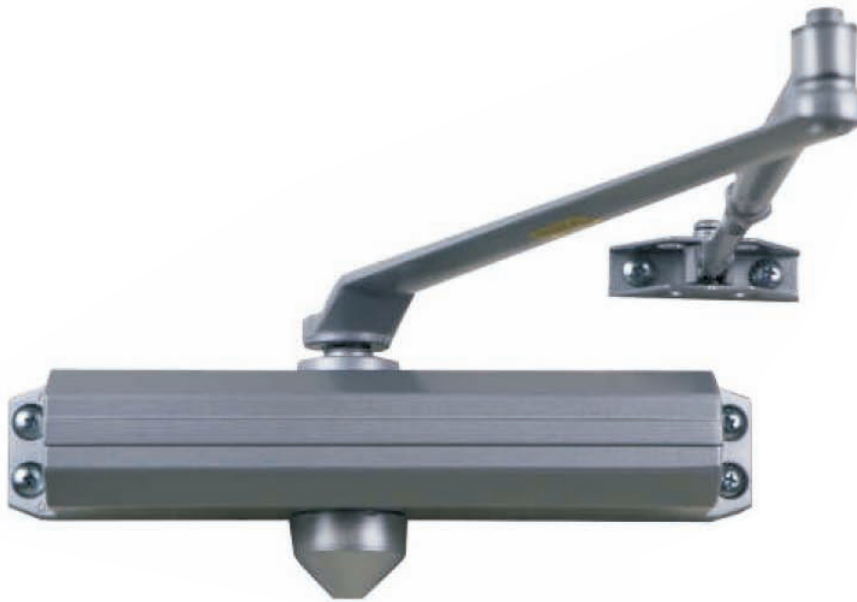


DC9016BC


Finish: Silver, MBL
Cover & Arm Finish: Silver, SSS, MBL

Product specification

Power size (adjustable by spring)	
Size 1 (up to 710mm/30 kg)	Yes
Size 2 (up to 910mm/45 kg)	Yes
Size 3 (up to 1070mm/65 kg)	Yes
Size 4 (up to 1220mm/85kg)	Yes
Size 5 (up to 1370mm/120kg)	Yes
Size 6 (up to 1520mm/150kg)	Yes
Mechanism	Rack and pinion
Adjustable closing speed	Yes
Adjustable latch action	Yes
Adjustable delayed action	Optional
Adjustable back check	Yes
Maximum door width (mm)	1520
Maximum door weight (kg)	150
Opening angle	180°
LH and RH doors - Universal application	Yes

Features

- Adjustment: Spring power size adjustable 1 to 6
 Adjustable backcheck
 Adjustable sweep speed
 Adjustable latching speed
- Compact format in timeless design
- Constant closing action virtually unaffected by temperature fluctuations, with adjustable latch action
- Optimum wall and door protection, due to backcheck
- Suitable for fire-rated timber and metal doors
- UL certified and UL 10C 3 hours fire rating
- Forged steel arm for high traffic abuse
- Tri-packed for regular arm, top jamb and parallel arm mounting

Options

Hold open arm available	
Metal cover (Silver finish)	
SS304 SSS finish cover & SN finish arm	