


**DLA0055L : 55mm backset**  
**DLA0060L : 60mm backset**  
**DLA0065L : 65mm backset**

**Finish: SSS, PSS, PB/PVD, SB/PVD, MAB, BL/PVD**

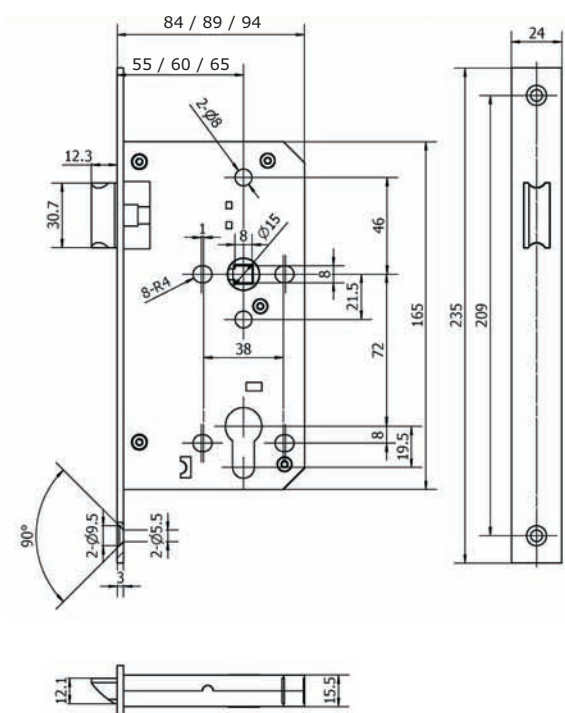

**Features**

- 55/60/65mm backset
- SS 304 forend, strike plate and follower
- SS 304 Latch
- Tested to Grade X: 200,000 test cycles
- Forend and strike plate available square or radius
- Pierced to accept bolt through furniture at 38mm centres
- Suitable for 120min timber and 240min metal doors
- Lever Handle operates latch
- For use by public where there is little incentive to exercise care and high chance of misuse

**BS EN 12209 Classification**

3	X	8	1	0	G	0	B	C	2	0
---	---	---	---	---	---	---	---	---	---	---