

EAFS25-60



Domestic Use



Flexible




IP Rating available
20/44/67



Convenience
assemble



Cutting available

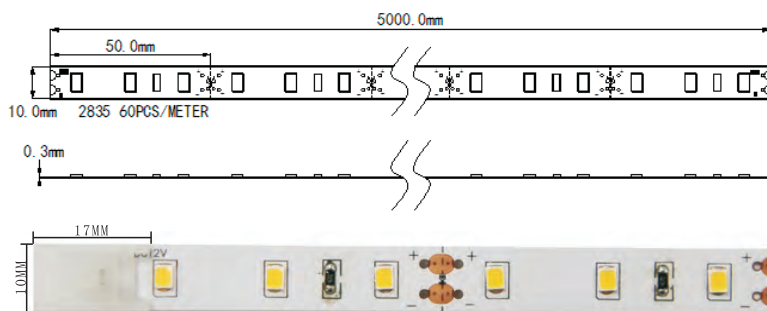

Features

- SMD 2835 300/ 600PCS / roll (5000x10x 0.3mm).
- DC 12/24V input, 0.2W/PC 2835 chip 3-LED cuttable for DC12V, 6-LED cuttable for 24V.
- Easy to install with 3M adhesive on back.
- Dimmer & Driver can be matched.
- Operating temperature :- 20°C+45°C.
- Long operation life : 50,000 hrs.
- Durable structure & stable performance.
- ETL/CE/ROHS compatible.
- Easy and seamless connect each section with exclusive clip, match well with narrow aluminium profile.

Applications :

Architectural decorative lighting / Stairway lighting & decoration / Shop-window decoration / Indoor decoration / Emergency & security / Walkway lighting.

Specification:

Item Code	Color	Watts/M	LEDs/M	L(mm)
EAFS25-60 (3000k)	Warm	9.6 W/m	60	500/5000
EAFS25-60 (4000k)	Cool/Wht	9.6 W/m	60	500/5000
EAFS25-60 (6000k)	Day Light	9.6 W/m	60	500/5000

Accessory:

Product Name	Item No	Photo
LED Lead Cable	EACC29	
Connector	EACC30	