

EAFS31



Domestic Use



Flexible



IP Rating available
20/44/67



Convenience
assemble



Cutting available



Features:

- High lumen, high CRI and good color consistency
- Better flexibility rolled copper foil for FPC
- Can load more current with thicker FPC
- Easy installation with fast connecting EuroArt System


Application:

- Designed for illumination of ceiling, wall decoration

Accessory:



Product Name	Item No	Photo
LED Lead Cable	EACC29	
Connector	EACC30	

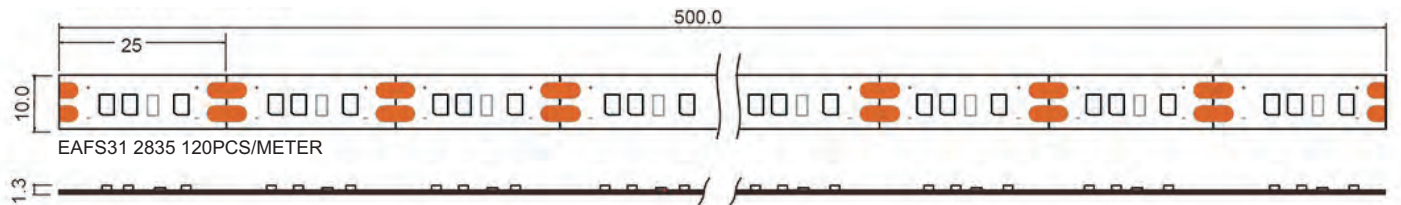

Specification:

Item no.	Size	LED Chip	Input	Watts/M	CCT	Lum/m	IP
EAFS31	500-5000x10	120pcs/m 2835	DC12V	14.4 W/m	3000k 4000k 6500k	1120Lm	IP20,44,67