

EAFS51



Domestic Use



Flexible



IP Rating available
20/44/67



Convenience
assemble



Cutting available




Features:

- High lumen, high CRI and good color consistency
- Better flexibility rolled copper foil for FPC
- Can load more current with thicker FPC
- Easy installation with fast connecting EuroArt System
- Strip light can be connected with soldering.

Application:

- Designed for illumination of ceiling, wall decoration and cabinet.

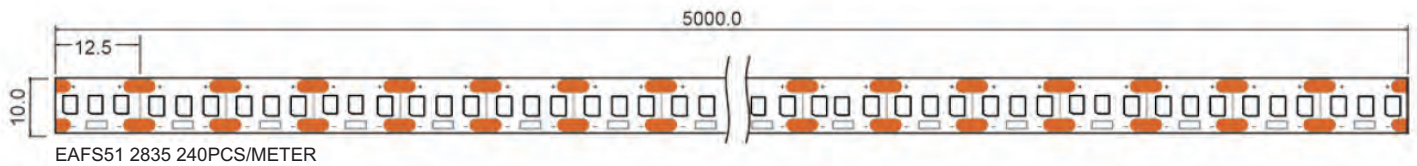

Specification:

Size	LED Chip	Input	Watts/M	CCT	Lum/m	IP
500-5000x10	240pcs/m 2835	DC12V	18 W/m	3000k 4000k 6500k	1850Lm	IP20,44,67