

EAFS56



Domestic Use



Flexible



IP Rating available
20/44/67



Convenience
assemble



Cutting available




Features:

- High lumen, high CRI and good color consistency
- Better flexibility rolled copper foil for FPC
- Can load more current with thicker FPC
- Easy installation with fast connecting EuroArt System
- Strip light can be connected with soldering.

Application:

- Designed for illumination of architecture, decoration, staircase, cabinet, safety showcase

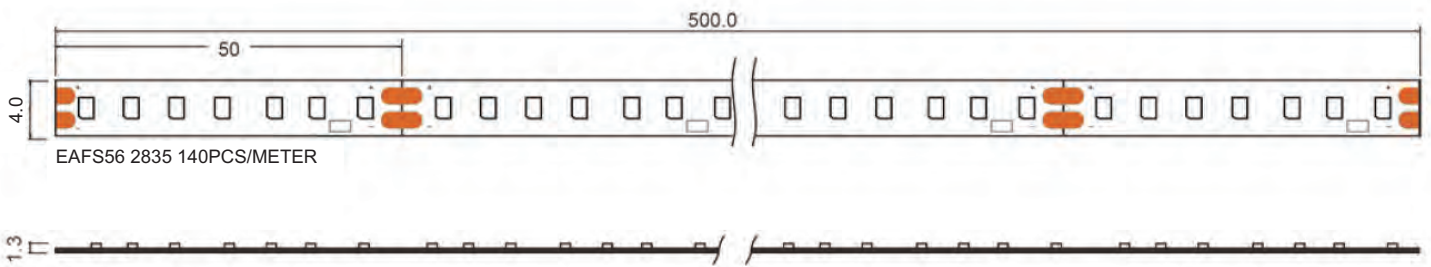

Specification:

Item no.	Size (mm)	LED Chip	Current	Input	Watts/M	CCT	Lum/m	IP
EAFS56	500-5000x4	140pcs/m 2835	20/30/ 40mA	DC24V	12 W/m	3000k 4000k 6500k	960/1400/ 1800Lm	IP20,44,67