

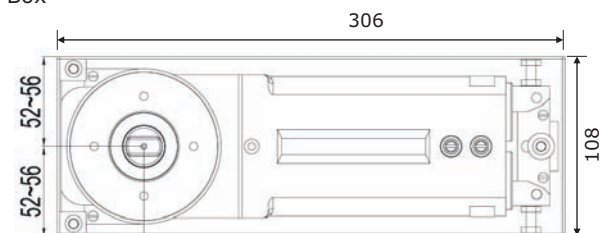


FS9403

Closing control

- Area Under Valve 1
- Area Under Valve 2

Finish: SSS, PSS
Plate

Box

Features

- Body in heavy duty cast iron to ensure high durability.
- Suitable for double and single action doors upto 120kg.
- Suitable for timber, metal and glass doors.
- Fixed power size EN3 with high efficiency allows a real personalization of opening and closing forces.
- Wide range of adjustment within cement box to solve possible alignment problems on site without taking down the door.
- Heat treated high alloy steel mechanism with ball bearing race for optimum efficiency.
- High quality anti-freezing oil and seal rings, makes the floor springs virtually insensitive to temperature changes.
- Closing speed and latching speed controlled by two independent valves to ensure consistent performance.
- Easier door opening and improved accessibility due to Cam-Motion technology.
- Cover plate and eyelet in satin stainless steel for a consistence aesthetic appeal.