


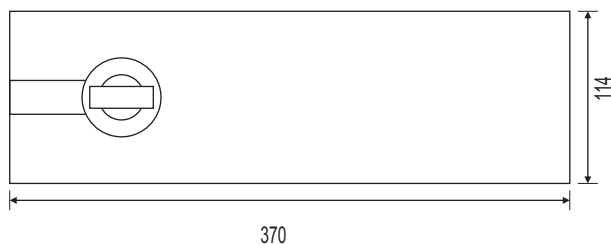

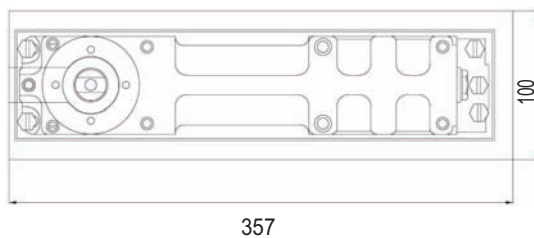


FS9516

Closing control

-  Area Under Valve 1
-  Area Under Valve 2

Finish: SSS, PSS
Plate

Box

Features

- Body in heavy duty cast iron to ensure high durability.
- Suitable for double and single action doors upto 400kg.
- Suitable for timber, metal and glass doors
- Adjustment within cement box to solve possible alignment problems on site without taking down the door.
- Suitable for the use on fire rated doors.
- Mechanical back check to prevent uncontrolled opening.
- Adjustable power EN1-6 with high efficiency allows a real personalization of opening and closing forces.
- Max opening upto 180° in both swing with hydraulic control.
- Over pressure value to safe guard the mechanical components in case of abuse.
- High quality anti-freezing oil and seal rings, makes the floor springs virtually insensitive to temperature changes.
- Closing speed and latching speed controlled by two independent valves to ensure consistent performance.
- Easier door opening and improved accessibility due to Cam-Motion technology.
- Cover plate and eyelet in satin stainless steel for