

WS409



Features:

- External installation with double soft close system, no cutting or grooving needed
- Concealed damper with re-set function
- Damper with anti jump and anti decoupling function
- Reduction of the handle to the essential: visually minimalistic without losing grip surface for a comfortable opening and closing of the doors

Specifications:


- Door width: 500-1200mm
- Door thickness: Max 20mm
- Door height: Max 2500mm
- Door weight: 10-50kg per panel

Weight

10-50kg



Slot on door panel

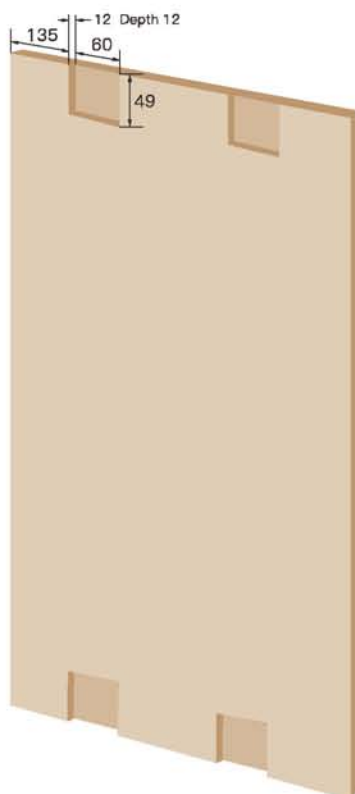

Running Installation

