



For Small Doors and Narrow Frames


SLIDE - ON

Product Description:

- Opening Angle: 95°
- Diameter of hinge cup: 26mm
- Height of hinge cup: 9.5mm
- Hole spacing: 32/38mm
- Drilling dimension of the door: 3~6mm
- Door thickness: 12~18mm
- Material: Steel
- Finish: Nickel plated

Installation Dimensions:

- H= Height of mounting plate
- K= Distance from edge of door to the edge of cup
- D= Required cover distance on the side panel
- A= Gap between door and side panel
- L= Distance from inside edge of door to the outside edge of side panel
- T= Door thickness

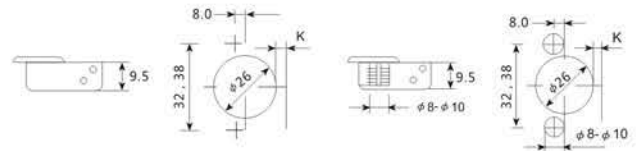

Options of screw and dowels

Euro screw 6.4mm Screw no E	M8 dowel 8mm Dowel no D8	M10 dowel 10mm Dowel no D10	Easy dowel 8mm Dowel no DE
---------------------------------------	------------------------------------	---------------------------------------	--------------------------------------

Formula and the parameters in the table below can be used for left, right and side adjustment

Figures needed of both - drilling holes "K" on the door and height "H" of the mounting plate to solve

Coverage calculation table

D \ K	3	4	5	6
H				
-2	15	16	17	18
0	13	14	15	16
2	11	12	13	14
4	9	10	11	12

Coverage calculation table

D \ K	3	4	5	6
H				
-2	6	7	8	9
0	4	5	6	7
2	2	3	4	5
4	0	1	2	3


Coverage calculation table

D \ K	3	4	5	6
H				
-2	0	-1	-2	-3
0	2	1	0	-1
2	4	3	2	1
4	6	5	4	3

Full overlay




HM311500



Half Overlay



HM311501



Inset



HM311502

