


**ODS 4000 : For High Traffic Doors**  
**ODS 4005 : For Medium Traffic Doors**



**Finish: SSS**

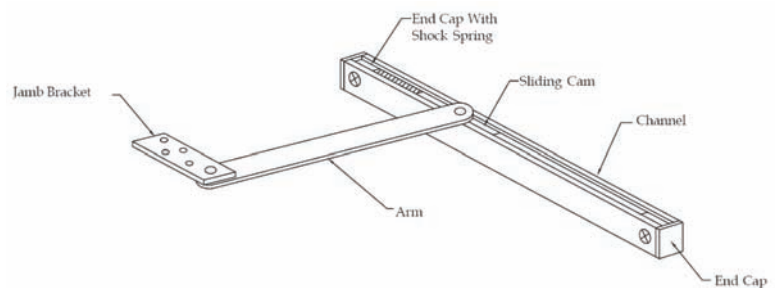

**General Information**

Overhead holders and stops are used to prevent unnecessary damage to the door, frame, wall and other door hardware by limiting the degree of door swing. They are installed at the top of a door opening; therefore, out of the general reach and not a tripping hazard. Whether for commercial or residential application, the use of overhead holders and stops extends the life of the opening and other hardware.

EuroArt offers three functions for most Overhead Stops and Holders.

- Hold Open – Door will stay held open at the selected degree of opening. Hold open adjustment screw controls the mount of force required to disengage the hold open mechanism.
- Stop – Door stops at selected degree of opening.
- Friction – Most commonly used on doors without closers. Door will virtually stay held open at the selected degree of opening. Friction tension adjustment screw controls the amount of resistance when opening and closing the door.

**ODS4005**

