

WS408



Features:

- External installation with double soft close system for aluminium frame door upto 35mm.
- Concealed damper with re-set function.
- Damper with anti jump and anti decoupling function.
- Reduction of the handle to the essential: visually minimalistic without losing grip surface for a comfortable opening and closing of the doors.

Specifications:

- Door width: 650-1200mm
- Door thickness: upto 35mm profile
- Door height: Max 2500mm
- Door weight: 10-50kg per panel





Weight



Installation Possibilities



Installation

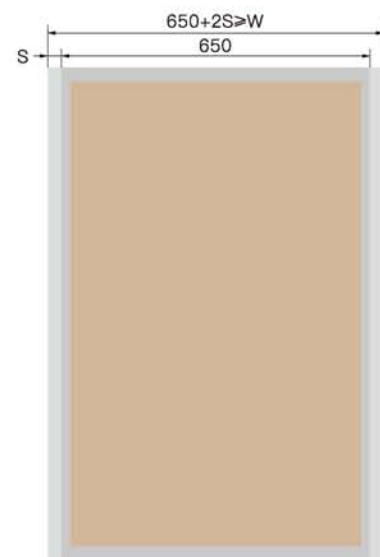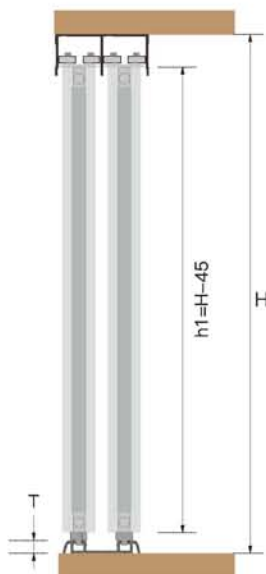

Required dimension of door height and cabinet height.

$$h1 = H - 45 - (T - 6)$$

T = Height of down rail, if T > 6

Suitable for door width.

$$h1 = H - 45 - (T - 6)$$