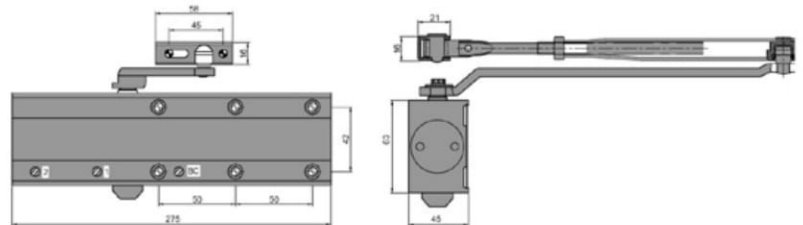


DC6026BC


Finish: Silver, Gold
Cover & Arm finishes: SSS, PSS, PVD, AB

Product specification

Power size (adjustable by spring)	
EN2 (up to 850mm/45kg)	Yes
EN3 (up to 950mm/60kg)	Yes
EN4 (up to 1100mm/80kg)	Yes
EN5 (up to 1250mm/110kg)	Yes
EN6 (up to 1400mm/140kg)	Yes
Mechanism	Rack and pinion
Adjustable closing speed	Yes
Adjustable latch action	Yes
Adjustable delayed action	Optional
Adjustable back check	Yes
Maximum door width (mm)	1400
Maximum door weight (kg)	140
Opening angle	180°
Tested to BS EN 1154: 1997	Yes
CE marked	Yes
DDA (min door width 728mm)	Fig 1
DDA (min door width 835mm)	Fig 66
LH and RH doors - universal application	Yes
Fire rated (BS EN 1634-1: 2000)	Yes

Features

- Heavy duty adjustable door closer
- Compact format in timeless design
- Simple, easy installation & guaranteed quality
- Non-handed unit
- Attractively priced solution with optimum reliability
- Constant closing action virtually unaffected by temperature fluctuations, with adjustable latch action
- Optimum wall and door protection, due to backcheck
- Smooth door action, thanks to high mechanical efficiency
- Hold open arm available
- Supplied with parallel arm bracket
- Suitable for 120min fire-rated timber and 240min metal doors
- Tested to Grade 8: 500,000 cycles.

BS EN 1154 Classification

Figure 1 Fitting	4	8	2 6	1	1	3
Figure 66 Fitting	3	8	2 5	1	1	3