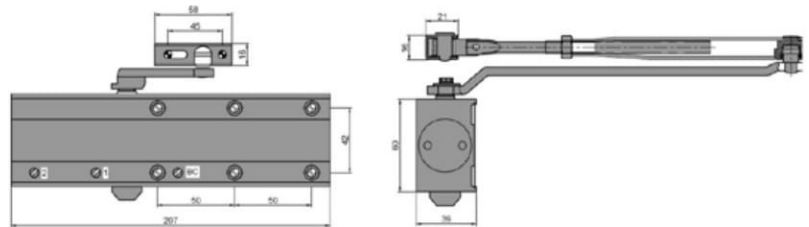


DC5024


With SSS cover and arm

Finish: Silver, Gold
Cover & Arm finishes: SSS, PSS, PVD, AB

Product specification

Power size (adjustable by position)	
EN2 (up to 850mm/45kg)	Yes
EN3 (up to 950mm/60kg)	Yes
EN4 (up to 1100mm/80kg)	Yes
Mechanism	Rack and pinion
Adjustable closing speed	Yes
Adjustable latch action	Yes
Adjustable back check (CE in Fig 66)	Yes
Maximum door width (mm)	1100
Maximum door weight (kg)	80
Opening angle	180°
Tested to BS EN 1154: 1997	Yes
CE marked	Yes
DDA (min door width 936mm)	Fig 1
DDA (min door width 753mm)	Fig 66
LH and RH doors - universal application	Yes
Fire rated (BS EN 1634-1: 2000)	Yes

Features

- Slimline compact design
- Quick and easy to install
- Non-handed unit
- Outstanding value for money
- Constant closing action virtually unaffected by temperature fluctuations
- Reliable closing with adjustable latching action
- Hold open arm available
- Supplied with parallel arm bracket
- Suitable for 120min fire-rated timber and 240min metal doors
- Tested to Grade 8: 500,000 cycles.

BS EN 1154 Classification

Figure 1 Fitting	4	8	2 4	1	1	3
Figure 66 Fitting	4	8	3	1	1	3