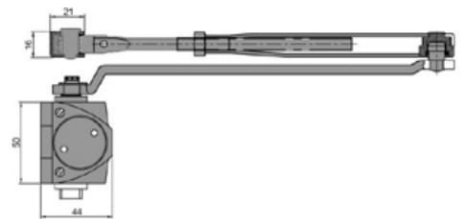
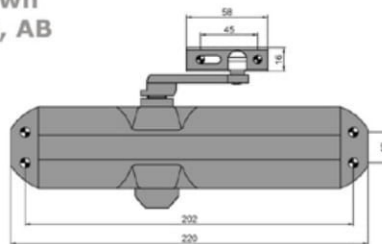


**DC1024**


**Finish: Silver, Gold, White, Black, Brown**  
**Cover & Arm finishes: Silver, SNP, PB, AB**


**Product specification**

Power size (adjustable by position)

EN2	Yes
EN3	Yes
EN4	Yes
Mechanism	Rack and pinion
Adjustable closing speed	Yes
Adjustable latch action	Yes
Maximum door width (mm)	1100
Maximum door weight (kg)	80
Opening angle	180°
LH and RH doors – universal application	Yes
CE marked	Yes

**Features**

- Low cost solution for standard doors
- Quick and easy to install
- Non-handed unit
- Inexpensive, proven reliability
- Closing cycle largely unaffected by temperature
- Hold open arm available
- Suitable for 120min fire-rated timber and 240min metal doors
- Tested to Grade 8: 500,000 cycles.

**BS EN 1154 Classification**

Figure 1 Fitting	4	8	2 4	1	1	3
Figure 66 Fitting	4	8	3	1	1	3