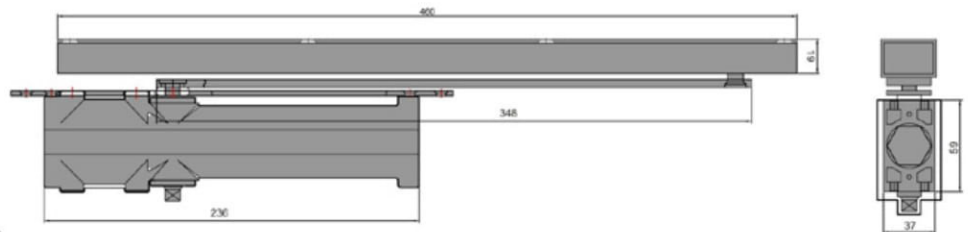


**DC8024**

**Finish: Silver, Gold, Bronze, Black**

### Product specification

Power size (adjustable by spring)	
EN2	Yes
EN3	Yes
EN4	Yes
Mechanism	Cam action
Adjustable closing speed	Yes
Adjustable latch action	Yes
Maximum door width (mm)	1100
Maximum door weight (kg)	80
Minimum door thickness required (mm)	54
Opening angle	120°
LH and RH doors - universal application	Yes

Note: push or pull side of the door subject to rebate distances.

### DC8024 options

Standard slide rail	Optional
Mechanical hold open slide rail	Optional
Electro magnetic slide rail	Optional

### Features

- Enhanced aesthetics - providing the ability to retain a clean, unobstructed appearance to the door and interior
- Totally invisible when the door is closed. Guide rail only visible during opening moment
- Optimum protection against vandalism because of concealed installation
- Can be incorporated within the door pre-fabrication process, allowing complete installation in the factory
- Fully controlled, reliable closing with adjustable latch action
- Tested to Grade 8: 500,000 cycles.
- Hold open unit available

### BS EN 1154 Classification

4	8	2 4	1	1	3
---	---	--------	---	---	---