



Glass Door Hardware

For Commercial & Residential



Your Project Partner



Designing
Producing
Building
your glass world...!





EuroArt Complete Glass solution

For over 40 years, EuroArt has maintained its position as a leader in the frameless shower door industry. This is because we've always placed our customers first. Our mission is not only to develop products of unsurpassed quality, function, and visual appeal, but also to provide the services and project support you need to grow your business. Whether you need assistance with design, glass preparation, or installation, our highly trained technical staff is here to help you overcome any obstacle.

This catalogue includes all the products falling under our glass door category combined for our customers you with detailing and a clear structure so that you can find the fitting you are looking for with ease and accuracy. The shower fitting is made with high quality forged Brass whereas handles are made with Stainless steel. The products are design to make any rectification without damaging the glass. This gives an add on advantage post the installation of the glass fitting.

This catalogue provides a comprehensive detail of our choicest glass solutions ranging from patch and point fittings, door control devices, locks, and accessories to the most updated collection of shower cubicle fittings. These are attractive, hard wearing, and reliable products which will make your building or residence look good and which will perform their function well for many years to come - we guarantee it! As always, our aim is to provide you with the latest functionality trends that can inspire and enable even the most unimaginable glass applications.

We hope you enjoy our new complete glass solution Catalogue.





Vision

"To become a trusted and respected supplier identifying solution that meet industry and customer requirements"

Core Values

- Integrity
- Excellence
- Reliability
- Perfection
- Consistency



Quality and Tested Production

EuroArt's Product development team works on three fundamental principles – knowledge, tools, and systematic process for conceptualizing. We are striving constantly to push our boundaries forward. We try to control costs and improve quality by applying zero-defect and efficiency-focused techniques. We believe that the process of designing products is profoundly different from the process of making them. EuroArt learns from whole system to bring best quality fitting for its customers.

Training and Development

Training is a prime opportunity to expand the knowledge base of all employees. Training and development provide the individuals and organizations with different benefits such as improved employee performance and increased employee satisfaction and morale. It addresses the weaknesses of employees and the organization, increases productivity, brings innovation, reduces employee turnover, and enhances company efficiency and profile.

EuroArt gives utmost importance to staff training and continuous development at the workplace, enabling EuroArt staff who are qualified GAI, AHC and FDAI and FF&E experts to maintain their knowledge of industry standards and regulations.



Distribution

EuroArt has two main distribution hubs - Blackburn, UK and Jebel Ali Dubai, UAE.

Blackburn, UK distribution center caters the European market where as Jebel Ali, UAE distribution center manages Middle East, Asia and Africa.

Our strong logistics helps us build worldwide presence by managing the supply chain flow from our factories to warehouses and to reach the final consumer.



Malcolm Brown
Honorary Chairman

Introduction

Euro Art (UK) Ltd, with operations in Blackburn, UK develops and manufactures a comprehensive line of door hardware, including an extensive range of mortise locks, lever handles, cylinders, exit devices, door closers, hinges and builder's hardware.

Continuous research, new technologies and innovative design have positioned us among the world leaders of very reliable products with a high aesthetic value.

We ensure all products are tested and certified to internationally accepted industry standards issued by third party internationally recognized testing houses. Quality is incorporated in every stage of manufacture by the people behind the product. From design to machine operation, assembly and through to inspection every individual takes responsibility for their part in the design and manufacture of the product and contributes to a continuous quality control ethic. Function and form characterize the Euro Art products.

We have set up a dedicated export office with a single, challenging responsibility, to coordinate the export activities among all parts of the world. Euro Art will play a critical role in support of international architects, contractors and multinational corporations who demand the sophistication of quality product in every corner of the globe. Through specification writing, consulting and product selection we offer unmatched product solutions to meet the demands of today's modern buildings, while offering worldwide local support through our vast network of partners and distributors.

Euro Art will be proud to be given the opportunity to be your preferred leading specifier, distributor and technical service provider of architectural hardware across worldwide construction industry. In addition to superior product quality, Euro Art offers a mix of product expertise at a pricing that is unsurpassed in the global hardware industry.

Fine Buildings, whether new structures or refurbishment, will always need fine quality fittings and Euro Art will be there to provide them, now and in the future.

Guarantee

To support the high quality and first class engineering that has gone into the EuroArt product range, we offer a 2 to 10 years guarantee (subject to conditions) against defects due to faulty manufacturing, workmanship or defective material. EuroArt agrees to replace any defective product free of charge provided the product has been fitted in accordance with the fitting instructions and maintained correctly.

Technical Support

Comprehensive information and technical support services are available by contacting:

Tel: +44 1254 433883

Email: uk@euro-art.co.uk

Or visit our website

www.euro-art.co.uk



What's Inside

FLOOR SPRING	08 - 13
HYDRAULIC PATCH FITTING	14 - 15
PATCH FITTING	16 - 25
PULL HANDLE	26 - 35
SLIDING SYSTEM	36 - 44
SLIDING LOCK SETS	45 - 49
DROP DOWN SEALS	50 - 57
PROJECT REFERENCE	58 - 59



FLOOR SPRING

EuroArt Floor Springs provide the best mechanical means to support and control a door. They are designed to work with the law of physics to provide long-lasting performance and reliability. Floor Springs ensure convenience for all current double action and swing door types.

The FS Series Floor Springs are manufactured using superior quality raw material and ultra modern technology in compliance to internationally accepted industry standards. EuroArt Floor Spring range is available in variegated sizes, designs and specifications in accordance with the client's requirements.

The weight of the door is supported by bottom arm and floor

- Uses laws of gravity to its advantage.
- Door swings with less resistance.
- Both, lighter and heavier, type doors can be accommodated.
- Reduced stress on frame.
- Fasteners are in shear, not tension.
- Eliminates door sag.

Heavy-duty, hardened, one piece steel spindles

- Designed to provide positive dead stop.
- Thrust bearing supports vertical load.
- Needle bearings for lateral forces.
- Extra heavy-duty models also have an additional surface applied thrust bearing to handle heavier doors or doors that have very high traffic.

Bottom arm attached directly to closer spindle

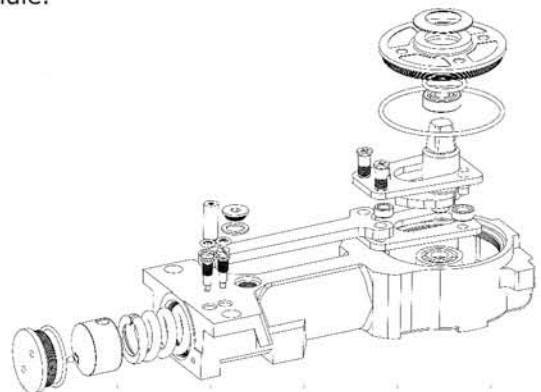
- A mechanical advantage that increases efficiency and ensures lower opening force.
- One to one ratio of door swing to spindle rotation makes control more precise.
- Floor closers are more efficient than a regular arm surface closer.


Advantages of concealed floor closers

- Aesthetics – let the beauty of the door and its surroundings take center stage.
- Vandal resistant – mechanism not exposed.
- The solution for arch top doors – offset floor closers.
- Both mechanical advantage and aesthetics – a concealed floor closer exclusive.

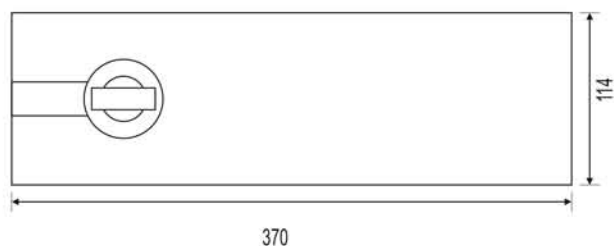

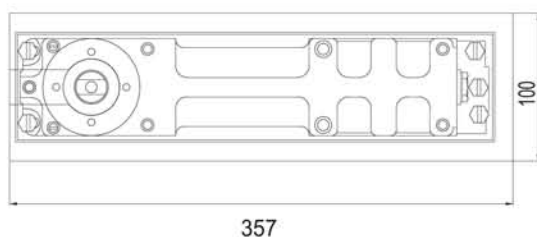
Special feature

- Suitable for timber, metal and glass doors.
- Universal mountings.
- Vertically/ horizontally adjustable.
- Special hydraulic fluid and thermostatic valves make the floor springs virtually insensitive to temperature changes.
- All floor spring supplied with fixed tested standard spindle.





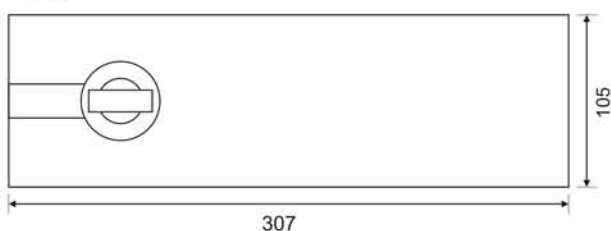

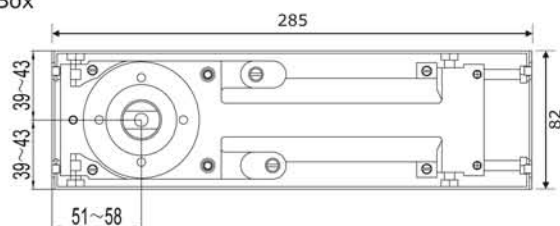
FS9516

Closing control

-  Area Under Valve 1
-  Area Under Valve 2

Finish: SSS, PSS
Plate

Box




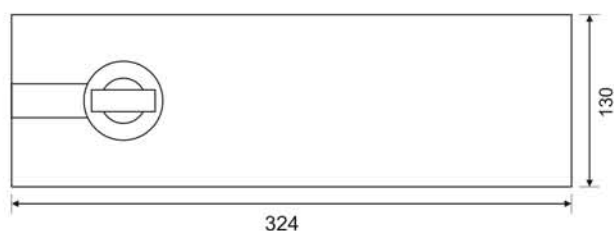

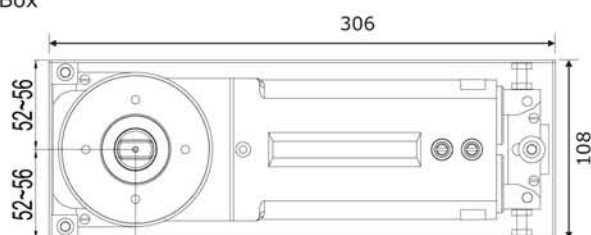
Features

- Body in heavy duty cast iron to ensure high durability.
- Suitable for double and single action doors upto 400kg.
- Suitable for timber, metal and glass doors
- Adjustment within cement box to solve possible alignment problems on site without taking down the door.
- Suitable for the use on fire rated doors.
- Mechanical back check to prevent uncontrolled opening.
- Adjustable power EN1-6 with high efficiency allows a real personalization of opening and closing forces.
- Max opening upto 180° in both swing with hydraulic control.
- Over pressure value to safe guard the mechanical components in case of abuse.
- High quality anti-freezing oil and seal rings, makes the floor springs virtually insensitive to temperature changes.
- Closing speed and latching speed controlled by two independent valves to ensure consistent performance.
- Easier door opening and improved accessibility due to Cam-Motion technology.
- Cover plate and eyelet in satin stainless steel for a consistence aesthetic appeal.

FS7524

Closing control

Finish: SSS, PSS
Plate

Box




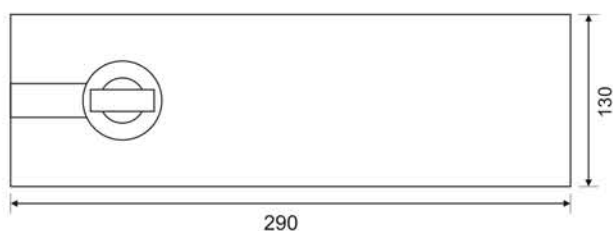

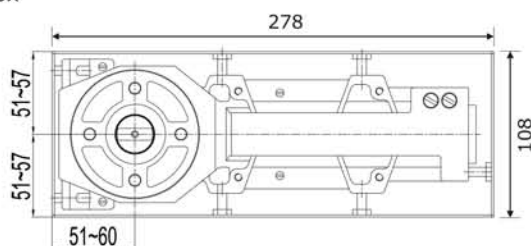
Features

- Body in heavy duty cast iron to ensure high durability.
- Suitable for double and single action doors upto 150kg.
- Suitable for timber, metal and glass doors.
- Adjustment within cement box to solve possible alignment problems on site without taking down the door.
- Suitable for the use on fire rated doors.
- Mechanical back check to prevent uncontrolled opening.
- Fixed power size EN2-4 with high efficiency allows a real personalization of opening and closing forces.
- Max opening upto 180° in both swing with hydraulic control from 105°. Free rotation from 105° to 180°.
- High quality anti-freezing oil and seal rings, makes the floor springs virtually insensitive to temperature changes.
- Closing speed and latching speed controlled by two independent valves to ensure consistent performance.
- Easier door opening and improved accessibility due to Cam-Motion technology.
- Cover plate and eyelet in satin stainless steel for a consistence aesthetic appeal.

FS9403

Closing control

Finish: SSS, PSS
Plate

Box


Features

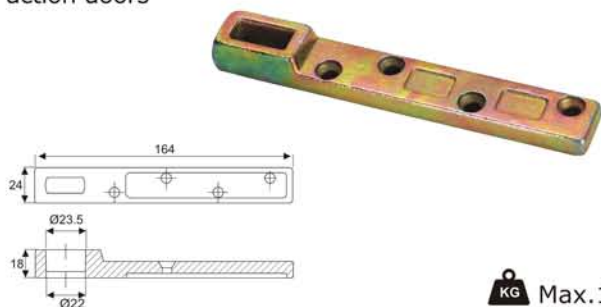
- Body in heavy duty cast iron to ensure high durability.
- Suitable for double and single action doors upto 120kg.
- Suitable for timber, metal and glass doors.
- Fixed power size EN3 with high efficiency allows a real personalization of opening and closing forces.
- Wide range of adjustment within cement box to solve possible alignment problems on site without taking down the door.
- Heat treated high alloy steel mechanism with ball bearing race for optimum efficiency.
- High quality anti-freezing oil and seal rings, makes the floor springs virtually insensitive to temperature changes.
- Closing speed and latching speed controlled by two independent valves to ensure consistent performance.
- Easier door opening and improved accessibility due to Cam-Motion technology.
- Cover plate and eyelet in satin stainless steel for a consistence aesthetic appeal.

FS6504

Closing control

Finish: SSS, PSS
Plate

Box

Features

- Body in heavy duty cast iron to ensure high durability.
- Suitable for double and single action doors upto 100kg.
- Suitable for timber, metal and glass doors.
- Fixed power size EN4 with high efficiency allows a real personalization of opening and closing forces.
- Adjustment in all directions within cement box.
- Heat treated high alloy steel mechanism with ball bearing race for optimum efficiency.
- High quality hydraulic fluid and valves makes the floor springs virtually insensitive to temperature changes.
- Soft closing or powerful latching action adjusted by valve to ensure proper closing, also in case of hard to latch locks.
- Easier door opening and improved accessibility due to Cam-Motion technology.
- Cement box only 40 mm height, to suits thin slab.
- Cover plate and eyelet in Satin Stainless Steel for a consistence aesthetic appeal.

AC10.01

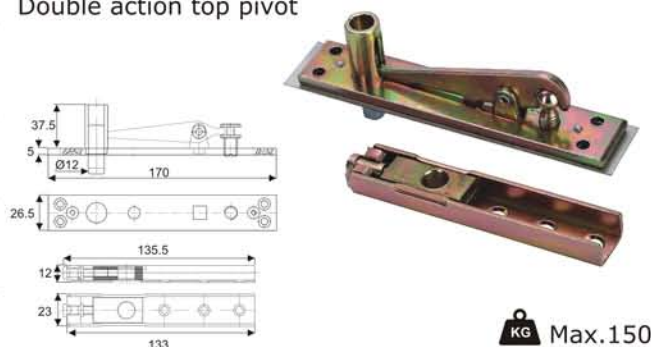
Reversible bottom arm in steel for double action doors



KG Max.150

AC10.02

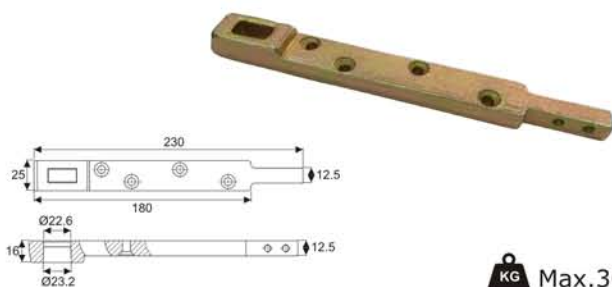
Double action top pivot



KG Max.150

AC10.06

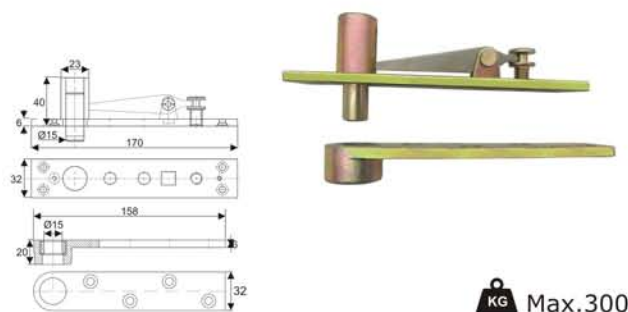
Heavy Duty bottom arm in steel for double action doors



KG Max.300

AC10.07

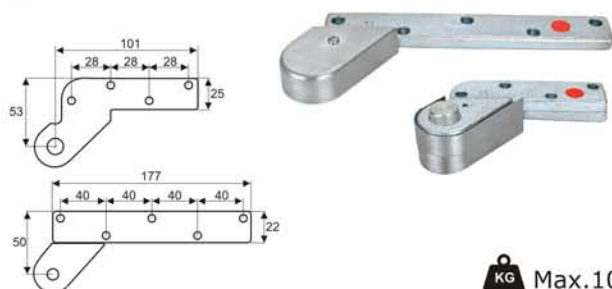
Heavy Duty double action top pivot



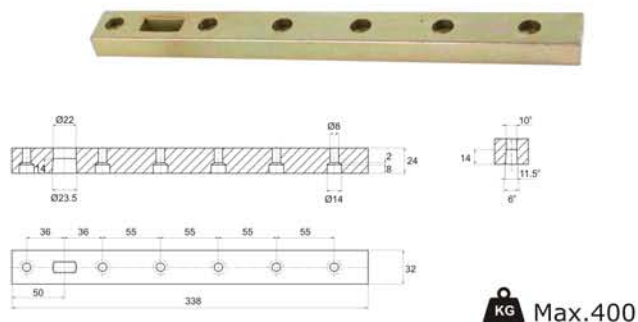
KG Max.300

SA.FS2004

Single action accessories set for right / left hand doors



KG Max.100

AC10.08


KG Max.400

SA.FS9516


KG Max.400




HYDRAULIC PATCH FITTING

EuroArt hydraulic patch is elegant and practical, the winning combination!


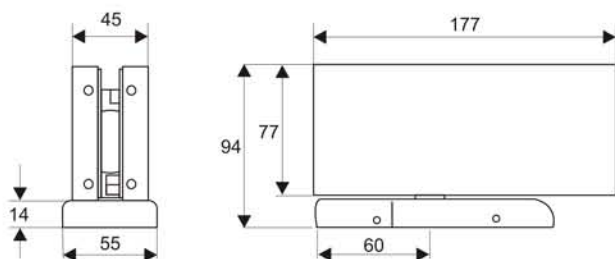
No more work on the floor:

It's been some time since a unique piece of architectural glass door hardware could be labeled as "revolutionary". We feel the time has arrived and it's the perfect description for our hydraulic patch.


Our hydraulic patch fittings is a fundamental element for the future of glass design. HP1003 is an innovative hydraulic patch for glass doors. The closure system is integrated in the lower hinge and has the same features of common floor springs, but unlike these, it is less invasive and it doesn't require any additional work: no holes in floor or boxes to cement. This results in a relevant time and cost savings.

HP1003

Closing control

-  Area under hydraulic control valve 1
-  Area under hydraulic control valve 2

Finish: SSS, PSS, MBL


Glass cut


Features

- Made for glass doors with design elements.
- Bottom patch and floor spring function are combined.
- No floor preparation or excavation required.
- Quick and easy installation with its adjustable base seat which solve any alignment issues on site without taking down the door.
- Body made of special alloy aluminum to ensure high durability
- Tested with European standards for long durability and excellent functionality
- Opening upto 140° in both direction with hydraulic control from 120°, free rotation from 120°-140°
- Heat treated high alloy steel mechanism with ball bearing for optimum efficiency.
- High quality anti-freezing oil and seal rings, makes it insensitive to temperature changes
- Soft closing or powerful latching action adjusted by valve to ensure proper closing. In case of hard to latch locks - the anti wind capability will ensure smooth functioning
- Can be re-installed after disassembly many times.
- For residential and commercial use in internal areas
- Cover plate in 304 Stainless Steel makes it rust resistant
- Loading capacity: 100 Kg.



PATCH FITTING

●EuroArt Patch fittings are a result of precision manufacturing, research and development. Quality materials and workmanship give our products, features necessary to meet the most demanding specifications and are differentiated by:

- All visible components are made of stainless steel.
- Available in Architectural Finishes.
- For toughened safety glass 8-12 mm thick and laminated glass in appropriate glass thickness.
- The fittings are designed to cope with large and heavy doors up to a maximum weight of 150 kg.
- Secure fixing for long life & high traffic areas.

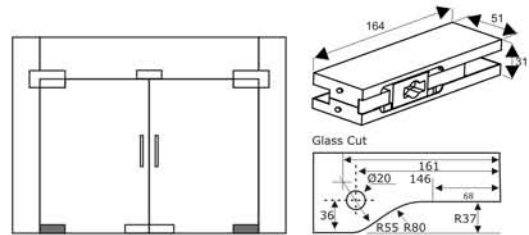
Apart from its elegant styling, the EuroArt Patch fittings system offer many advantages to its user. The core of the system consists of one fixing point an internal tapered thread barrel and two threaded flanges, thereby forming the primary connection between the fitting and glass. The structural link of the fitting to the fixing points is afforded via fixing screws and fitting plates. Adjustable patches and over panel patches have been designed to permit an angle adjustment allowing a wide pivot point from the edge. The patch fittings are made with the highest quality Stainless Steel materials to ensure high reliability and durability. The whole range of fittings is based on this fundamental concept. This design simplifies handling the glass as well as it is a prerequisite for the application with laminated safety glass.

PF10


Finish: SSS, PSS, MBE

Features

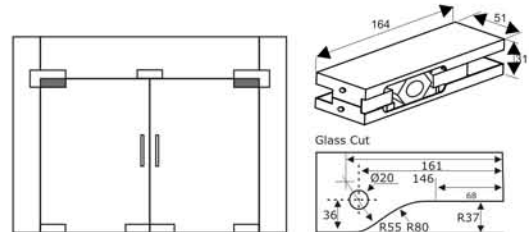
- Bottom patch fitting for double action door.
- Suitable for : 10 to 12mm Glass.
- Universal application.


PF20


Finish: SSS, PSS, MBE

Features

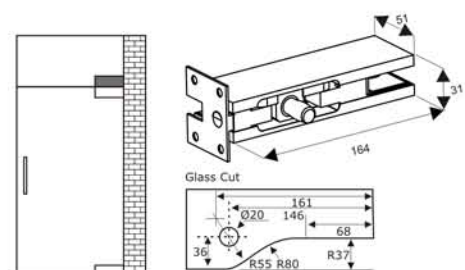
- Top patch fitting for double action door.
- Suitable for : 10 to 12mm Glass.
- Universal application.


PF30


Finish: SSS, PSS

Features

- Pivot patch fitting for wall fixing.
- Suitable for : 10 to 12mm Glass.
- Universal application.

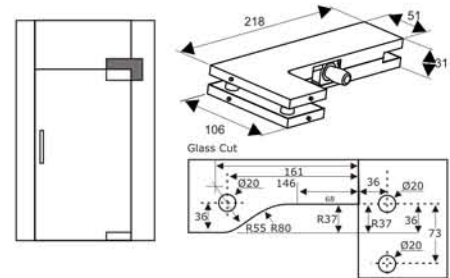


PF40


Finish: SSS, PSS, MBE

Features

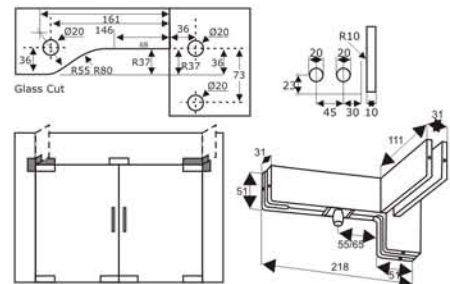
- Side panel patch fitting.
- Counter bearing for top patch fitting.
- Suitable for : 10 to 12mm Glass.
- Universal application.


PF41R/L


Finish: SSS, PSS

Features

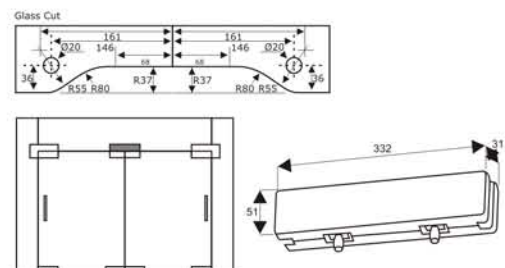
- Fin panel pivot patch fitting.
- Counter bearing for top patch fitting.
- Suitable for : 10 to 12mm Glass.
- Universal application.


PF50


Finish: SSS, PSS

Features

- Double pivot top patch fitting.
- Counter bearing for top patch fitting.
- Suitable for : 10 to 12mm Glass.
- Universal application.



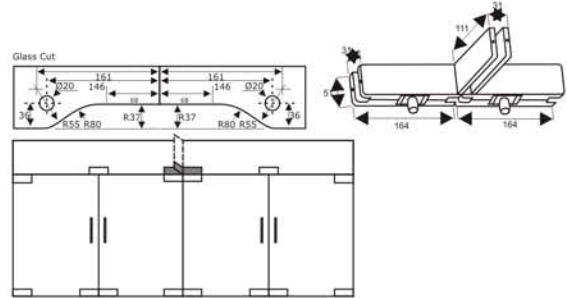
PF51



Finish: SSS, PSS

Features

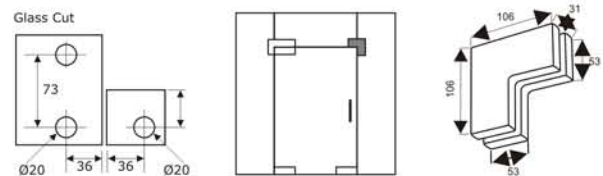
- Fin panel double pivot patch fitting.
- Counter bearing for top patch fitting.
- Suitable for : 10 to 12mm Glass.
- Universal application.

**PF60**

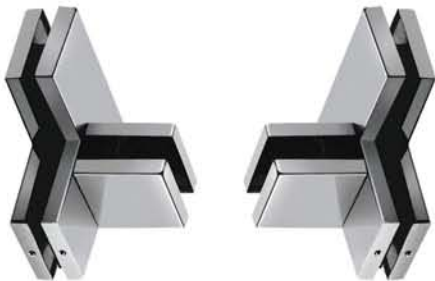
Finish: SSS, PSS

Features

- Top patch for fix glass panel on top & side.
- Suitable for : 10 to 12mm Glass.
- Universal application.



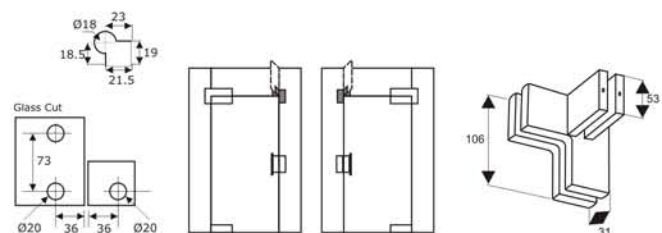
PF61R/L



Finish: SSS, PSS

Features

- Cover panel connector with fin fitting.
- Suitable for : 10 to 12mm Glass.
- Universal application.

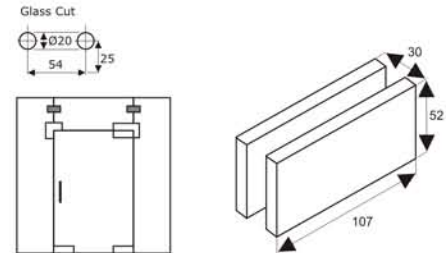


PF70


Finish: SSS, PSS

Features

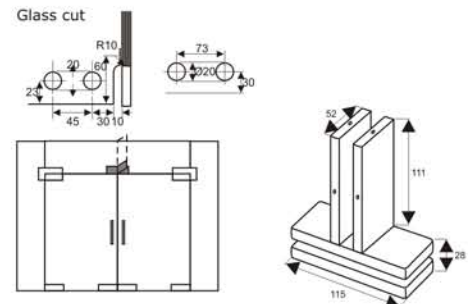
- Glass to glass connector patch.
- Suitable for : 10 to 12mm Glass.
- Universal application.


PF71


Finish: SSS, PSS

Features

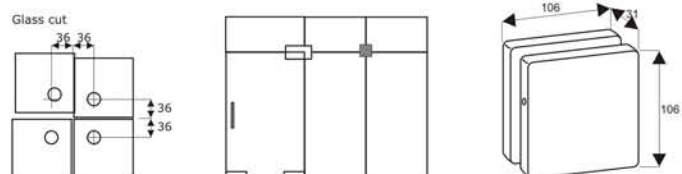
- Over panel connector with fin fitting.
- Suitable for : 10 to 12mm Glass.
- Universal application.


PF80


Finish: SSS, PSS

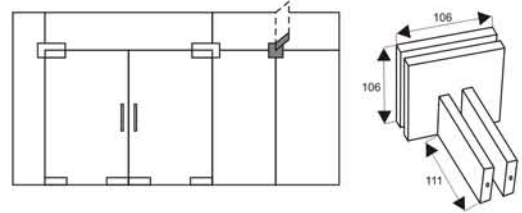

Features

- Glass clamp for joining over panel & side panel to reduce flexing.
- Suitable for : 10 to 12mm Glass.
- Universal application.



PF81

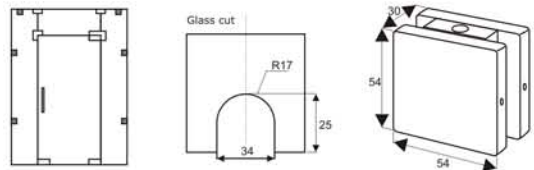

Finish: SSS, PSS


Features

- Four way patch connector with support fin bracket.
- Suitable for : 10 to 12mm Glass.

PF90



Finish: SSS, PSS


Features

- Glass clamp for joining over panel & side panel to reduce flexing.
- Suitable for : 10 to 12mm Glass.
- Universal application.

PL10


Finish: SSS, PSS, MBE

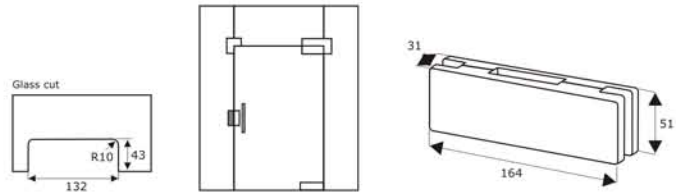

Features

- Euro profile patch lock with cylinder.
- Suitable for : 10 to 12mm Glass.
- Universal application.

PS50S

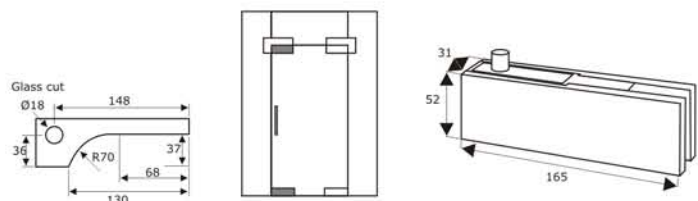
Finish: SSS, PSS, MBE
Features

- Sidelite mount keeper.
- Suitable for : 10 to 12mm Glass.


PL20

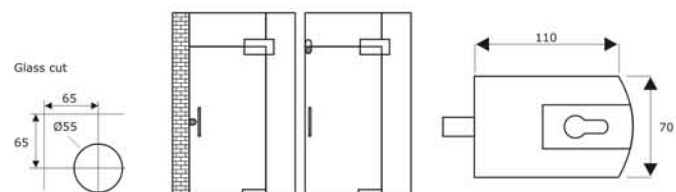
Finish: SSS, PSS, MBE
Features

- Euro profile corner patch lock.
- Suitable for : 10 to 12mm Glass.
- Universal application.


PL21

Finish: SSS, PSS
Features

- Euro profile patch lock with cylinder protection.
- Suitable for : 10 to 12mm Glass.
- Universal application.

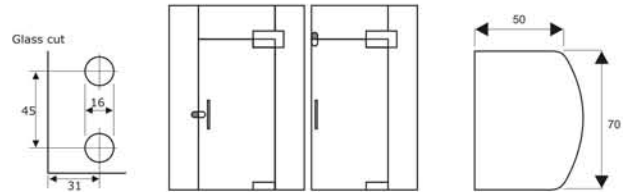


PS21


Finish: SSS, PSS

Features

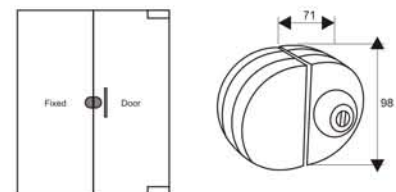
- Sidelite lock keeper.
- Suitable for : 10 to 12mm Glass.


PL398


Finish: SSS, PSS

Features

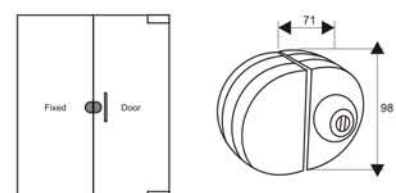
- Sidelite mounted key & turn lock patch.
- Suitable for : 10 to 12mm Glass.
- Universal application.


PL399


Finish: SSS, PSS

Features




- Sidelite mounted lock patch.
- Suitable for : 10 to 12mm Glass.
- Universal application.



PS20





Features

- Transom double strike patch.
- Suitable for : 10 to 12mm Glass.

Finish: SSS, PSS

PS30




Features

- Wall mounted transom strike patch.
- Suitable for : 10 to 12mm Glass.
- Universal application.

Finish: SSS, PSS

PS40

Features

- Sidelite mounted transom strike patch.
- Suitable for : 10 to 12mm Glass.
- Universal application.

Finish: SSS, PSS, MBE





PS41R/L



Finish: SSS, PSS

Features

- Sidelite mounted transom strike with fin support.
- Suitable for : 10 to 12mm Glass.
- Universal application.





PT50

Top Pivot Plate




Finish: SSS, PSS, MBE



PD83-C2


Top Rod



Finish: SSS, PSS

PD83-C3

Bottom Rod



Finish: SSS, PSS



PULL HANDLE

At EuroArt,
We believe that every door is a gateway
and your opportunity to make the first impression.

Having been working on the stainless steel pull handles
for many years, EuroArt now presents you a complete
range of pull handles.

By incorporating the superior material, outstanding
finish and a variety of styles, you will easily find the
balance of simplicity and flexibility in this line.

D Pull Handle

Mitred Pull Handle

Finish: SSS, PSS

Ref. No.	Size(A x B)
● PHS101	: 19 x 150mm
● PHS102	: 19 x 225mm
● PHS103	: 19 x 300mm
● PHS104	: 19 x 400mm
● PHS110	: 22 x 225mm
● PHS111	: 22 x 300mm
● PHS112	: 22 x 400mm
● PHS121	: 25 x 300mm
● PHS122	: 25 x 450mm
● PHS123	: 25 x 600mm
● PHS130	: 32 x 300mm
● PHS131	: 32 x 450mm
● PHS132	: 32 x 600mm
● PHS133	: 32 x 900mm
● PHS134	: 32x1200mm

Finish: SSS, PSS

Ref. No.	Size(A x B)
● PHS201	: 19 x 150mm
● PHS202	: 19 x 225mm
● PHS203	: 19 x 300mm
● PHS221	: 25 x 300mm
● PHS222	: 25 x 600mm
● PHS231	: 32 x 600mm
● PHS232	: 32 x 750mm
● PHS233	: 32 x 900mm

'T' Bar Pull Handle

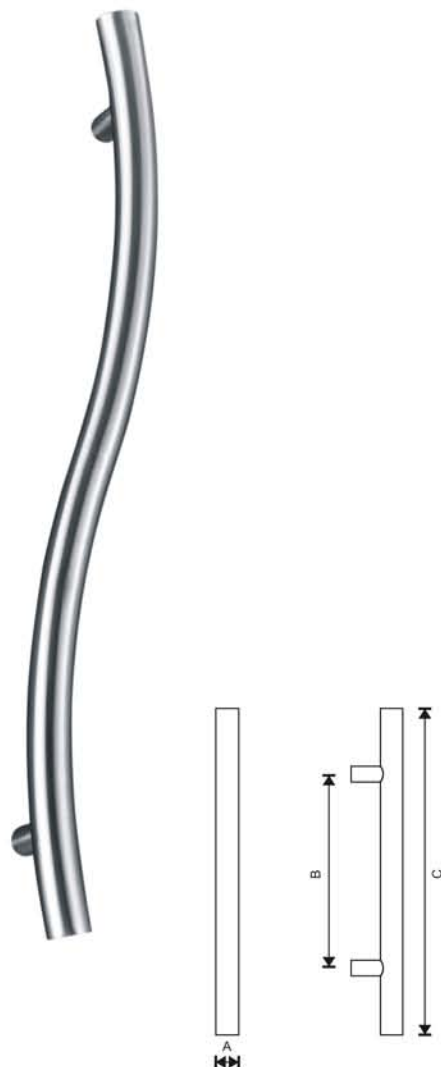
'C' Shaped Pull Handle

Finish: SSS, PSS, MBL

Ref. No.	Size(A x B x C)
● PHS301	: 19 x 225 x 325mm
● PHS302	: 19 x 300 x 400mm
● PHS321	: 25 x 225 x 344mm
● PHS322	: 25 x 300 x 419mm
● PHS323	: 25 x 450 x 600mm
● PHS330	: 32 x 300 x 450mm
● PHS331	: 32 x 450 x 600mm
● PHS332	: 32 x 600 x 775mm
● PHS333	: 32x1000x1200mm
● PHS334	: 32x1200x1400mm
● PHS335	: 32x1300x1500mm
● PHS336	: 32x1400x1600mm
● PHS337	: 32x1600x1800mm

Finish: SSS, PSS

Ref. No.	Size(A x B)
● PHS421	: 25 x 250mm
● PHS431	: 32 x 350mm

'S' Shaped Pull Handle

Finish: SSS, PSS

Ref. No.	Size(A x B x C)
● PHS501	: 19 x 300 x 400mm
● PHS521	: 25 x 300 x 419mm
● PHS522	: 25 x 450 x 600mm
● PHS530	: 32 x 450 x 600mm


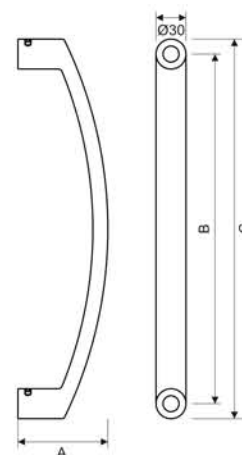
Cranked Pull Handle

Finish: SSS, PSS

Ref. No.	Size(A x B)
● PHS621	: 25 x 300mm
● PHS622	: 25 x 450mm
● PHS630	: 32 x 300mm
● PHS631	: 32 x 450mm
● PHS632	: 32 x 600mm

Square Mitred Pull Handle

MBL

SB

D Slim Pull Handle

Finish: SSS, PSS, SB, MBL

Ref. No.	Size(A x B)
● PHS701	: 19 x 150mm
● PHS702	: 19 x 225mm
● PHS703	: 19 x 300mm
● PHS704	: 19 x 450mm
● PHS705	: 19 x 600mm
● PHS721	: 25 x 300mm
● PHS722	: 25 x 450mm
● PHS723	: 25 x 600mm
● PHS724	: 25 x 750mm
● PHS725	: 25 x 900mm
● PHS726	: 25 x 1200mm

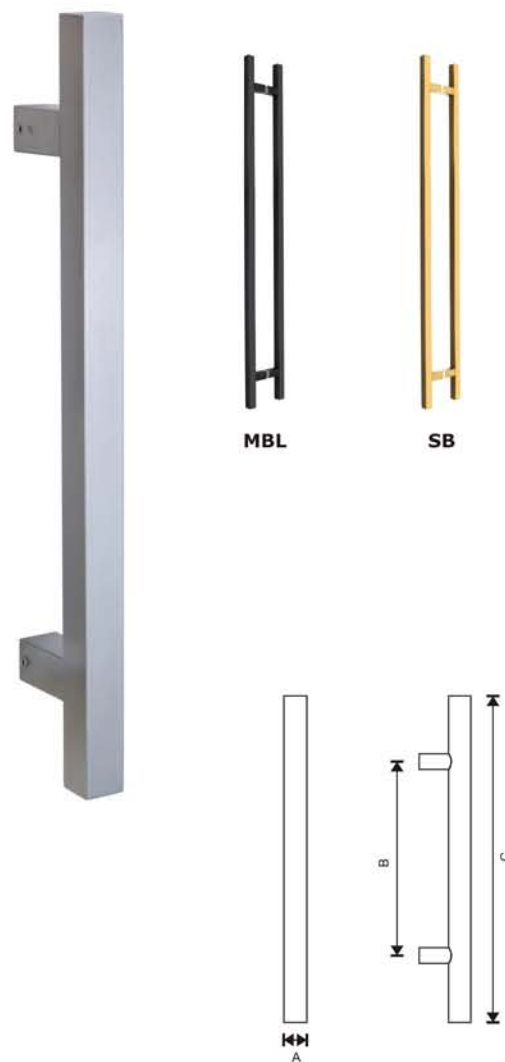
Finish: SSS, PSS, MBL

Ref. No.	Size (A x B x C)
● PHS1921	: 90 x 350 x 380mm

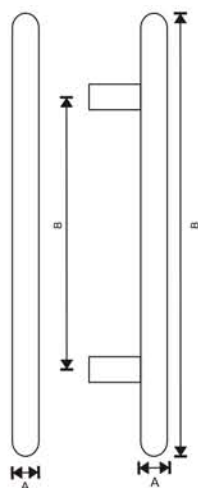
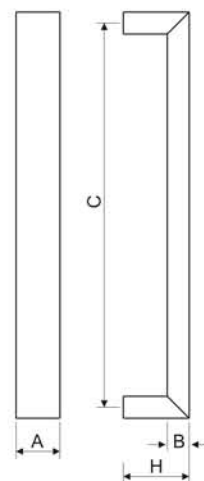
Inclined Support 'T' Bar Pull Handle

Finish: SSS, PSS

Ref. No.	Size(A x B x C)
● PHS1031	: 32 x 450 x 600mm
● PHS1032	: 32 x 600 x 775mm
● PHS1033	: 32x1000x1200mm
● PHS1034	: 32x1200x1400mm
● PHS1035	: 32x1300x1500mm
● PHS1036	: 32x1400x1600mm
● PHS1037	: 32x1600x1800mm

25mm Square 'T' Shape Pull Handle

Finish: SSS, PSS, MBL, SB

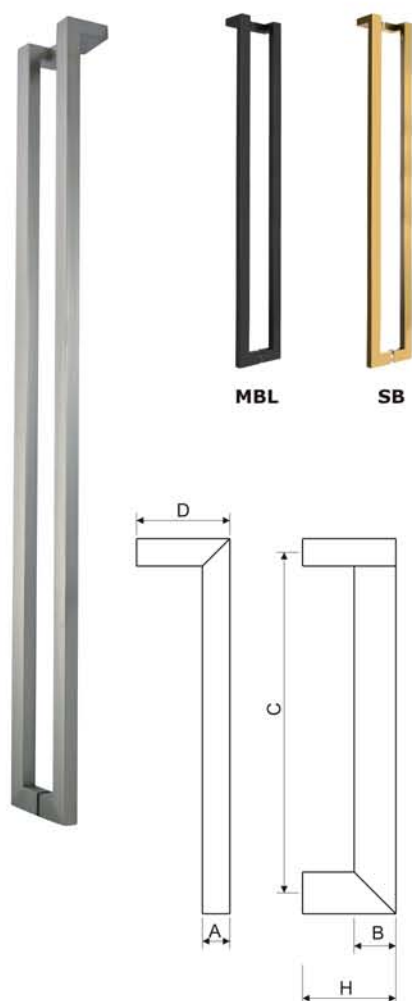
Ref. No.	Size(A x B x C)
● PHS1121	: 25 x 300 x 450mm
● PHS1122	: 25 x 450 x 600mm
● PHS1123	: 25 x 600 x 775mm
● PHS1124	: 25 x 800 x 1000mm
● PHS1125	: 25x1000x1200mm
● PHS1126	: 25x1200x1400mm
● PHS1127	: 25x1400x1600mm
● PHS1128	: 25x1600x1800mm

Oval 'T' Pull Handle

Allure Pull Handle

Finish: SSS, PSS

Ref. No.	Size(A x B x C)
● PHS1211	: 20 x 300 x 400mm
● PHS1212	: 20 x 400 x 500mm
● PHS1213	: 20 x 500 x 600mm
● PHS1214	: 20 x 700 x 800mm
● PHS1215	: 20x 900x 1000mm
● PHS1216	: 20x1100x1200mm
● PHS1217	: 20x1300x1400mm

Finish: SSS, PSS

Ref. No.	Size(A x B x C x H)
● PHS1321	: 25 x 13 x 300 x 50mm
● PHS1322	: 25 x 13 x 450 x 50mm
● PHS1323	: 25 x 13 x 600 x 60mm
● PHS1330	: 30 x 15 x 450 x 60mm
● PHS1331	: 30 x 15 x 600 x 60mm
● PHS1332	: 30 x 15 x 800 x 60mm
● PHS1341	: 40 x 20 x 600 x 70mm
● PHS1342	: 40 x 20 x 800 x 80mm
● PHS1351	: 40 x 30 x 600 x 70mm
● PHS1352	: 40 x 30 x 800 x 80mm

Marvel Pull Handle

Finish: SSS, PSS, SB, MBL

Ref. No.	Size(A x B x C x D x H)
● PHS1421	: 25 x 38 x 1000 x 85 x 85mm

Elegante Pull Handle

Finish: SSS, PSS, SB, MBL

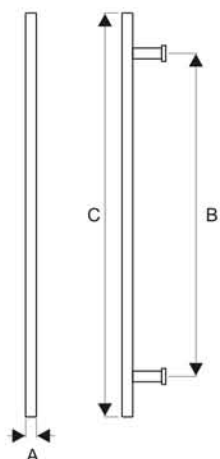
Ref. No.	Size(A x B x C x E x H)
● PHS1621	: 25 x 25 x 300 x 80 x 70mm
● PHS1622	: 25 x 25 x 450 x 80 x 70mm
● PHS1623	: 25 x 25 x 600 x 80 x 70mm
● PHS1641	: 40 x 20 x 300 x 80 x 75mm
● PHS1642	: 40 x 20 x 450 x 80 x 75mm
● PHS1643	: 40 x 20 x 600 x 80 x 75mm



LOCKABLE PULL HANDLE

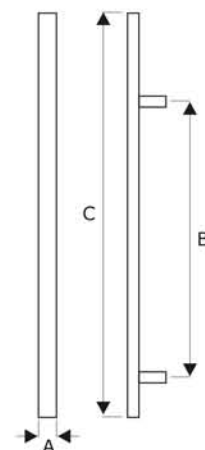
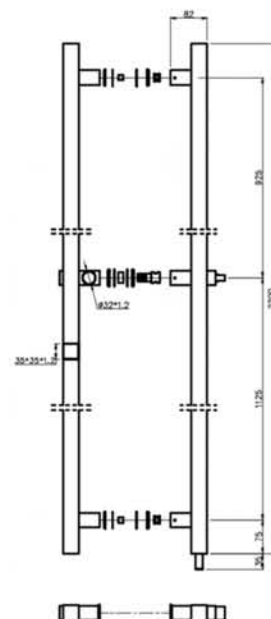
Features

- The PHS Series integrates EuroArt modern style door pulls with a deadbolt locking system.
- Engineered for ease of installation, the locking pull is manufactured to ensure strength and durability with clean and appealing lines.
- Key operated from outside; turn piece on inside.
- Floor socket with a spring opening.
- Bolt concealed inside pull provides a clean, streamlined look.
- Glass door applications secure the opening without bulky patch fittings or rails.
- Designed to suit 10-12mm thick glass.
- Customized length (Optional).

'T' Bar Lock Pull Handle

Finish: SSS, PSS

Ref. No. Size(A x BxC)

- PHS2100: 35x1250x1500mm

Square Lock Pull Handle

Finish: SSS, PSS

Ref. No. Size(A x BxC)

- PHS2200: 25x38x1250x1500mm



SLIDING SYSTEM

Glass Sliding Door Systems brings a modern aesthetic to commercial, residential and hospitality projects.

EuroArt sliding door system's use of minimal hardware offers an all-glass look that sets it apart from traditional sliding shower doors. Specially designed roller bearings produce quiet and smooth operation.

A wide range of accessories ensures that the individual sets can be adapted to an array of application types, with PHS series pull handles completing the holistic, integral appearance. Once you experience the quality and design of our sliding glass door systems, you are certain to receive a project result which will compliment and add value to any space. Our goal is to make sure that each person is satisfied with their sliding door applications.

EASV-A100 Series

Features

- SV-A100 / A125 are high quality systems for suspended, frameless sliding glass doors. Ideal for medium weight dividers and doors for home or commercial use.
- Applications for panels of 100 and 125 kg in weight per panel.
- There are also options for a fixed panel (F) thanks to the addition of tracks for this solution.
- High quality clamps and ball bearings with nylon rollers to ensure an exceptionally smooth and silent action.
- Vertical adjustment of +/- 5mm.
- No glass machining is required for any of the solutions.

Product characteristics	EASV-A100 / A125
For interior assembly	Yes
Maximum door weight	100kg. & 125kg.
Minimum door width	600mm
Maximum door Height	3000mm
For standard toughened glass assembly	Yes
Glass thickness	8-12
No Notch	Yes
Rail height	41 mm
Installation at wall	Yes
Ceiling mounting	Yes
Adjustable	Yes
Soft closing	No

Standard Kit Include:

Standard XL Track Rail
0 126 30



1 Pc

FT XL Track Rail
0 126 32



1 Pc

Fixes Glass Track Rail
0 103 30



1 Pc

EASV-A100
Fitting Set
0 116 00



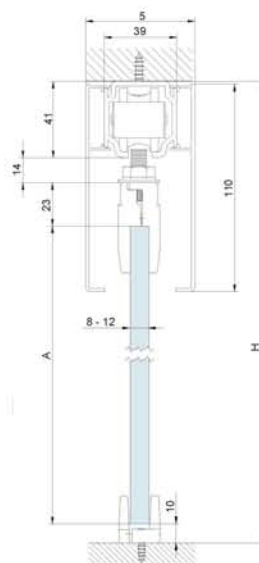
1 Set

EASV-A125
Fitting Set
0 126 00

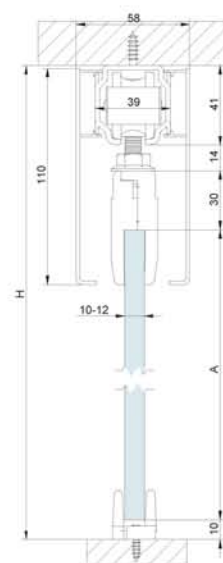


1 Set

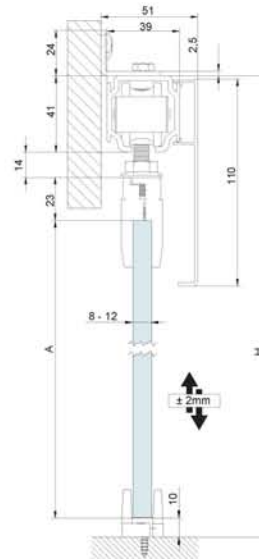
EASV-A100



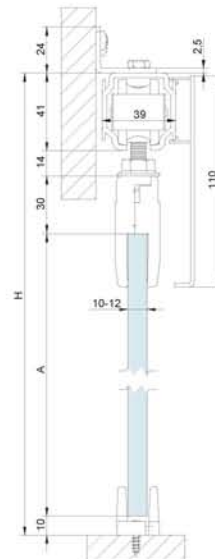
EASV-A125



EASV-A100



EASV-A125



EASV-A101D

Features

THE SV-A101D IS ONE OF EUROART'S HINGED SYSTEMS CREATED TO SAVE SPACE TOWARDS THE OUTSIDE AND CREATE INTERIOR SPACE DIVIDERS FOR MEDIUM WEIGHT OR LARGE FORMAT DOMESTIC USES.

1. A system of hinged sliding panels of 100 kg/pair of panels (concertina type) that allows all the panels to be moved at the same time.

2. It is possible to close an opening of up to 9 m wide by 2.65 m high.

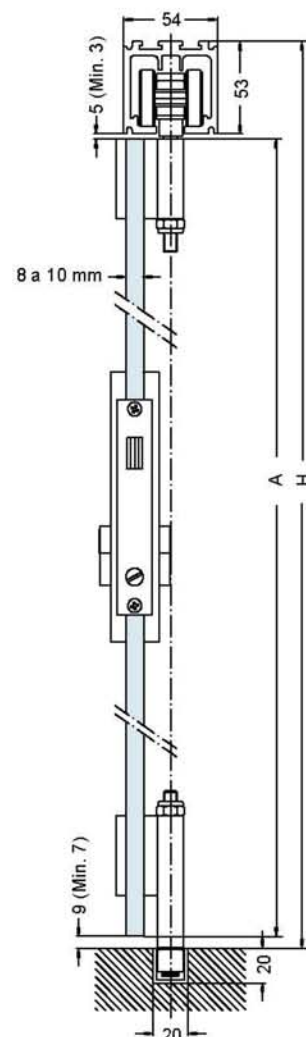
3. High strength rollers and high quality bottom guides to prevent any possible sway in the system.

Note that this solution has solid anti-vandal hinges; so in addition to the fact that the machining is on the inside of the panels, thereby providing a perfect finish, it also provides security in terms of closing.

Product characteristics		EASV-A101D
For interior assembly		Yes
Maximum door weight		100kg for pair of panel
Maximum door width		750mm
Maximum door Height		2650mm
Self closing		Cushioning effect
For standard toughened glass assembly		Yes
Sliding folding door	2 paneled doors	Yes
	4 paneled doors	Yes
	6 Paneled doors	Yes
Glass thickness		8-10
Rail height		53 mm
Installation at wall		No
Ceiling mounting		Yes
Adjustable		Yes

Kit Options:

Photo	Description	2 Doors	4 Doors	6 Doors
	Top Track Rail 3 Meter 025630	1	1	1
	Bottom Track Rail 3 Meter 008730	1	1	1
	Final roller with simple hinge 010770	1	1	1
	Bottom guide with simple hinge 010772	1	1	1
	Central roller with double hinge 010773	---	1	2
	Double hinge with leg pin 010774	1	2	3
	Double hinge A central 010775	---	1	2
	Bottom central guide with double hinge 010776	---	1	2
	Superior pivot with hinge 010777	1	1	1
	Bottom pivot with hinge 010778	1	1	1
	Double hinge B central 010780	2	4	6





EASV-SINCRO X110

Features

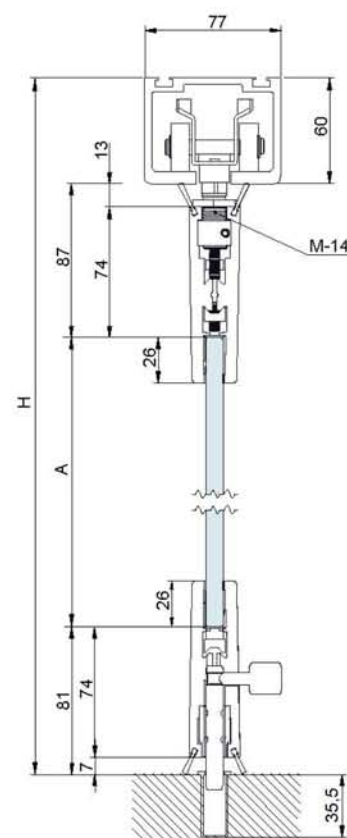
THE MULTIPLO COMPACT GLASS FAMILY IS THE BEST CHOICE FOR CLOSING LARGE SPACES WITH MULTIPLE GLASS SHEETS WITH AN ATTRACTIVE MINIMALIST DESIGN.

- The EASV-Sincro X110 system allows you to open and close two sheets simultaneously and synchronized on both sides, with the possibility of installing sheets of up to 110kg.
- In addition, it incorporates as a novelty SOFTPRO* technology by EuroArt, a feature that brings greater smoothness and safety in the opening and closing of the installation.

Product characteristics	EASV - SINCRO X110
For interior assembly	Yes
Maximum door weight	110kg.
Minimum door width	740mm
Maximum door width	1040mm
Maximum door Height	2650mm
Self closing	Cushioning effect
For standard toughened glass assembly	Yes
Sliding 2 paneled doors	Yes
Glass thickness	10-12
Rail height	60 mm
Installation at wall	Yes
Ceiling mounting	Yes
Adjustable	Yes
Soft Closing	Yes

Kit Options:

Photo	Description	Item Code
	SV-Sincro X110 Kit with 2 retaining stopper for 2 doors - 3 meter track	091025
	SV-Sincro X110 Kit SOFTPRO 55Kg. for 2 doors 3 meter track	091029
	SV-Sincro X110 Kit with 2 double SOFTPRO 110Kg. for 2 doors - 4 meter track	091059



$$A=H-288$$

EASV-P250


Features

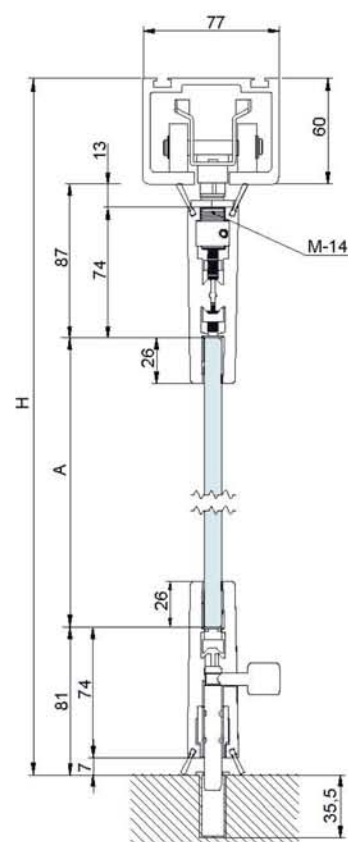
THE EASV-P250 IS A MOBILE CLOSING SYSTEM DESIGNED FOR LARGE SPACES; AN IDEAL SOLUTION FOR CREATING DIFFERENT ENVIRONMENTS FOR LARGE-SCALE COMMERCIAL USE.

- A system that makes it possible to assemble an infinite number of glass panels of up to 250 kg.
- High precision rollers with ball bearings for a smooth sliding action, as well as vertical adjustment.
- The installation has no bottom guide channel, providing 100% obstacle-free passage once open. It also has safety pivots to attach the panels to the floor.
- The particular feature of this model is the panel parking area, which is very small, and allows the panels to be parked where desired, perpendicularly and parallel to the installation.
- The panels slide easily and the system is adjustable to the millimeter for ease of installation.
- The EASV-P250 assembly becomes a large glass screen once closed, providing a finish free of frames and profiles, and without architectural barriers.
- Certified for wind.

Product characteristics	EASV-P250
For interior assembly	Yes
Maximum door weight	250kg.
Minimum door width	600mm
Maximum door width	1200mm
Maximum door Height	3000mm
Glass thickness	10-12
Rail height	60 mm
Installation at wall	No
Ceiling mounting	Yes

Kit Options:

Photo	Description	Item Code
	Top track 100 cm	099029
	Left park 135° junction track	026664
	Left park 45° junction track	026666
	Right park 135° junction track	026665
	Right park 45° junction track	026667
	Left parallel park 90° junction track	026671
	Left parallel park 90° curve junction track	026668
	SV-P250 Roller	026655
	Top clamp component	60 to 80cm - 026751 80 to 120cm - 026752
	Bottom clamp component	60 to 80cm - 026851 80 to 120cm - 026852
	Bottom clamp with lock	60 to 80cm - 027151 80 to 120cm - 027152
	Top hinge clamp component	60 to 80cm - 026951 80 to 120cm - 026952
	Bottom swinging clamp	60 to 80cm - 027051 80 to 120cm - 027052



$$A=H-288$$



LOCKSET & HINGES






EuroArt has the product range needed to fit doors made of any material. And when it comes to glass, our range suits all types of door openings.

With vast experience within the constructional glass industry EuroArt has developed the fittings for the toughened glass so that the glass preparation is reduced to the quick and easy drilling of a few holes. The 900 Lockset and 700 hinge series from EuroArt are developed for offering advanced solution on internal doors: a complete and balanced range which defines new standards for internal glass doors.

Silent Features:

- Specially designed lock set for glass door.
- Innovative design passage lock, with follower and lever handle.
- Suitable for glass to wall frame and glass door to glass panel.
- Suitable for left and right handed doors.
- Special cushioning elements provide for effective latch damping so the door closes quietly yet securely into place.
- Body is made with high quality material to ensure reliability and durability.
- Can be re-used after disassembly many times.
- Equipped with special seal suitable to cover thickness 8, 10 and 12mm.

TT01 - Wall to Glass Application
TT02 - Glass to Glass Application



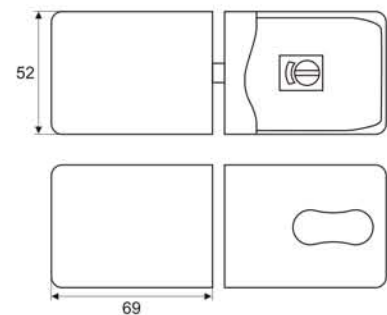
Strike Plate for TT01

Finish: SSS, MBL

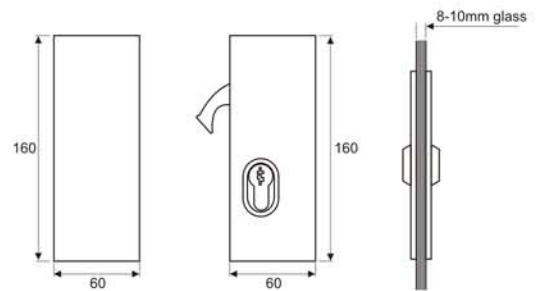
TT05 - Indicator Lock without Cutout on Glass
TT05GG - Glass to Glass Application
TT05WG - Wall to Glass Application



Strike Plate
TT05WG




Finish: SN, CP, MBL

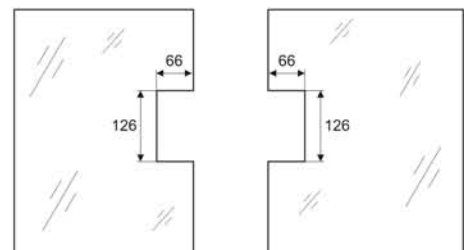
HL01


Finish: SSS, PSS

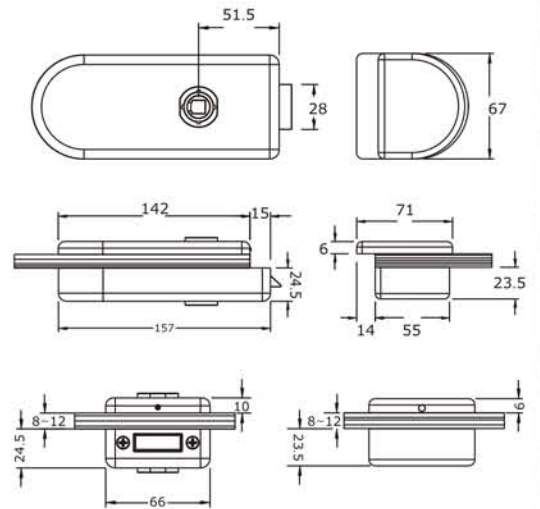
TT06- Sliding Lock with recessed pull
TT06GG - Glass to Glass application
TT06WG - Wall to Glass application



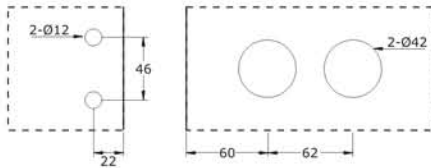
Strike Plate
TT06WG




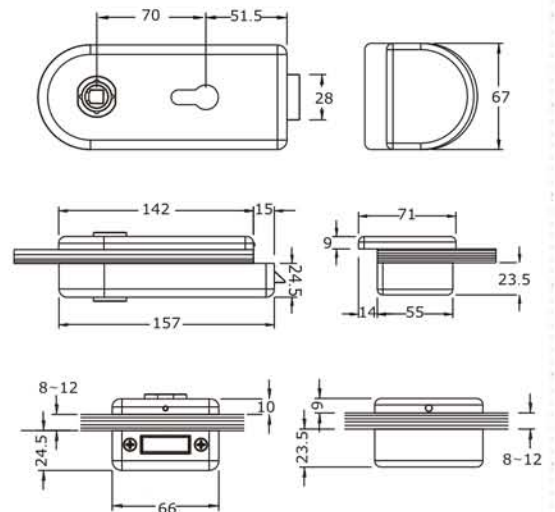
Finish: SSS, PSS

PL01


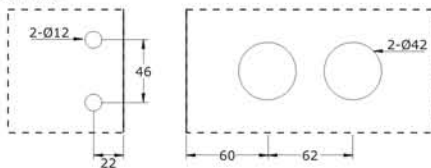
Glass cut




Finish: SSS, PSS


PL02





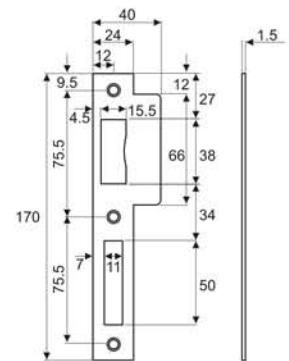
Glass cut



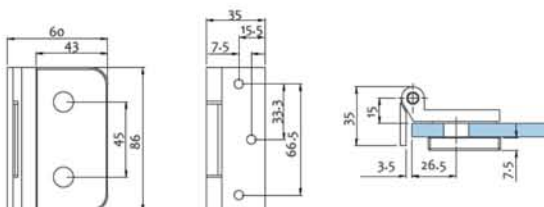
Finish: SSS, PSS



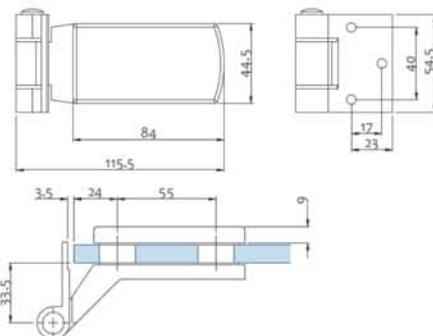
PL03

Lock

Strike Plate

Glass cutting
Finish: SSS, PSS
GH705

- Glass Door Hinge


Finish: PSS, SSS
GH706

- Glass Door Hinge


Finish: SN, CP, MBL

AUTOMATIC DROP DOWN SEALS



 **EUROART**



Complete line of automatic drop down seal and elegant perimetral/meeting seals, dedicated to glass doors and walls. Essential to close the gaps under and around swing or sliding glass doors and walls and block air, dust, insects and noise.

ASGLA

Finish:

 SILVER
ANODISED

 STAINLESS
STEEL

 SCOTCH
BRITE

 BLACK
ANODISED

Seals


THERM



SIL



THERM



PP

Features

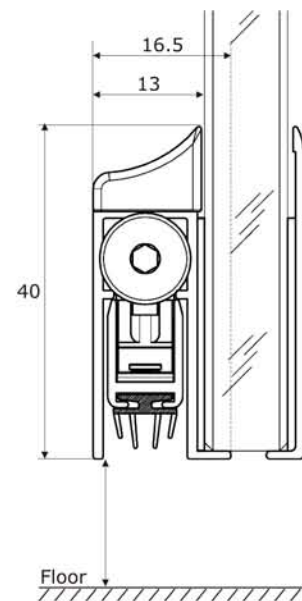

The best selling product for hinged glass doors. It is installed on the side of the door by a high-sealing double-sided tapes. It is available with many combination of seals and in different profile finishing.



Length

330, 430, 530, 630, 730, 830, 930, 1030, 1130, 1230, 1330, 1430 1530, 1630, 1730, 1830mm

Trimming

125mm standard
50mm | l. 330mm


Application

Closing Plug included

Activation Plate Included

Fixing Type

Plunger Type


ASGLABTSL


Model designed for bottom rail glass doors, with a special activation mechanism that works with the standard door guide on the floor, closing the seal on the floor when the door is totally closed.

Available for glasses 10mm, 12mm, 12,7mm thick and in multiple anodized finishing.

Length

330, 430, 530, 630, 730, 830, 930, 1030, 1130, 1230, 1330, 1430 1530, 1630, 1730, 1830mm

Trimming

150 mm standard
50mm | l. 330mm
100mm | l. 430mm

Finish:


SILVER
ANODISED



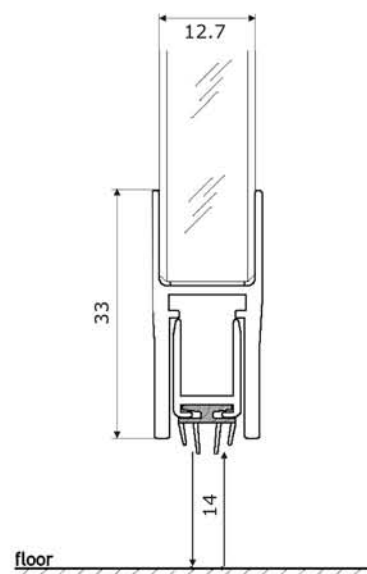
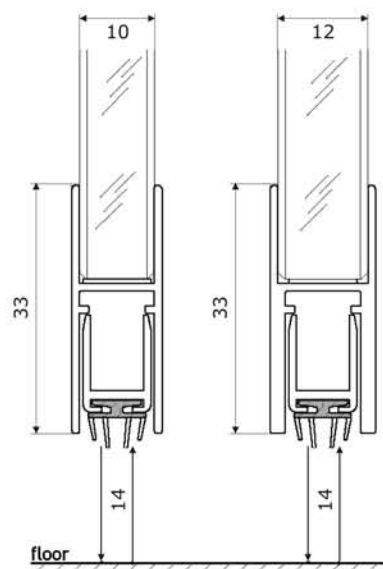

STAINLESS
STEEL




SCOTCH
BRITE



BLACK
ANODISED










Application

Closing Plug included

Therm Seals

Fixing Type

Plunger Type

PP Seals


GLASSLIP

Finish: Transparent
Application

Features

GLASS LIP is an adhesive perimetral seal for glass doors and walls with simple and easy fitting. This product allows to seal gaps from 2.5 to 7mm wide and it can be used on glass from 8 to 14mm thickness. Its soft lips can be shortened simply by tearing off part of the lip.

Length

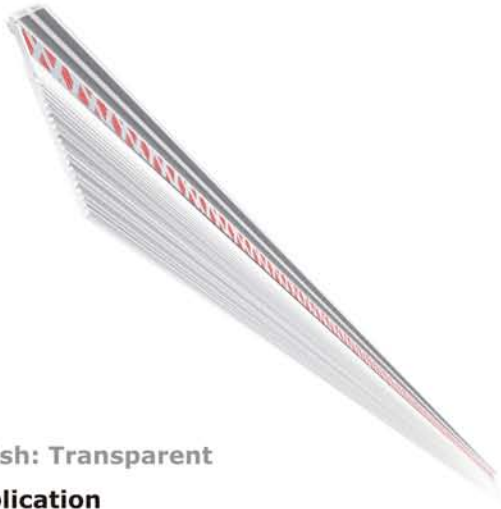
3000mm

Trimming

maximum on both sides

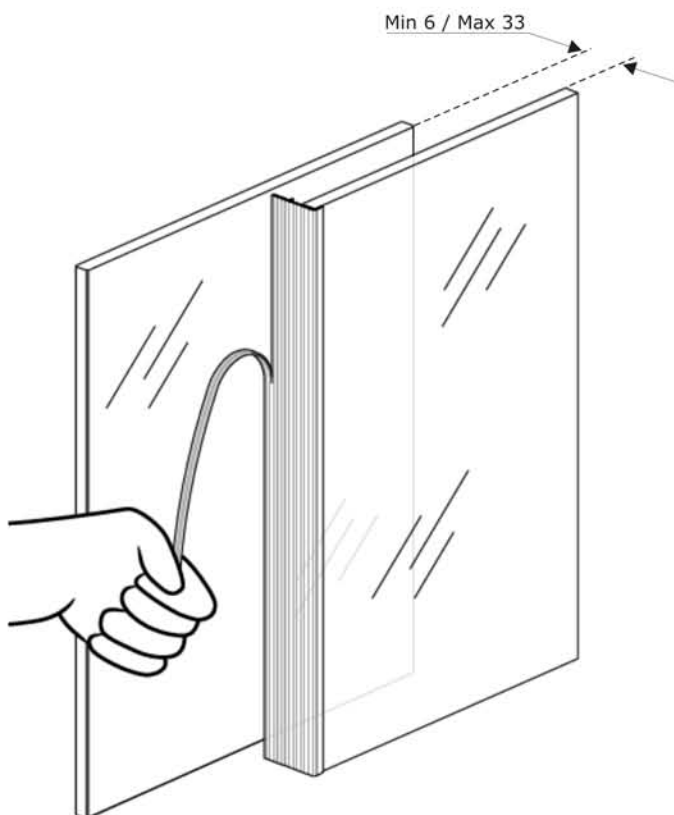
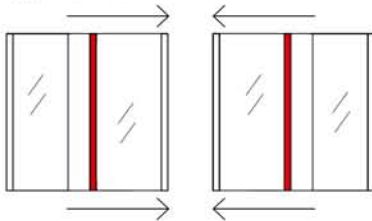
Box Pack : 40 Pcs.

GLASSLIPS



Finish: Transparent

Application



Features

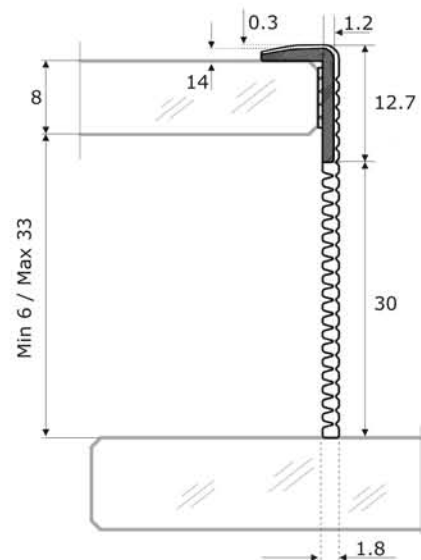

GLASS LIP SLIDE is an adhesive seal for sliding glass doors with a simple and quick installation system. The seal lip can be shortened by each millimeter simply by tearing off part of the lip. This seal allows to fill from 12 to 30mm gaps and it is available for glass from 8 to 14mm thickness.

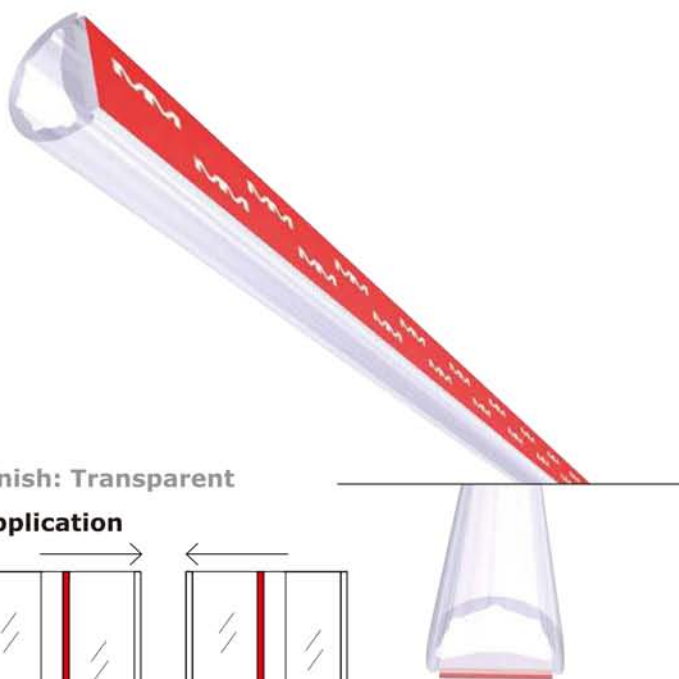
Length

3000mm

Trimming

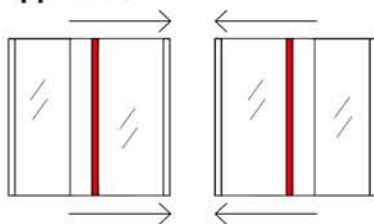
maximum on both sides



GLASSBR


Finish: Transparent

Application


Features

GLASS BUMPER is an adhesive seal for sliding glass doors and walls of simple and easy fitting. It can be applied with a template which allows a perfect positioning always in the centre of the glass. It consists of a soft transparent bumper seal which is quickly installed with an high strength transparent adhesive. The seal serves as a front damper on single lead sliding doors (leaf/frame) or on double leaf sliding doors (leaf / leaf).


GLASS BUMPER can be used on glasses from 8mm to 12mm thickness.

Length

3000mm

Trimming

maximum on both sides



GLASSFR

Features

Perimetral seal can be used to fill the gap around the leaves of a glass door. Its installation is possible without the use of any glue or adhesive. The inner part of the anodized aluminum profile is equipped with soft anti-vibration seals. This patented system allows to fill 4 to 8 mm gaps. Available for glass of 8, 10 and 12mm thickness & in multiple anodized finishes.

Finish:


SILVER
ANODISED




STAINLESS
STEEL




SCOTCH
BRITE




BLACK
ANODISED

Glass Thickness


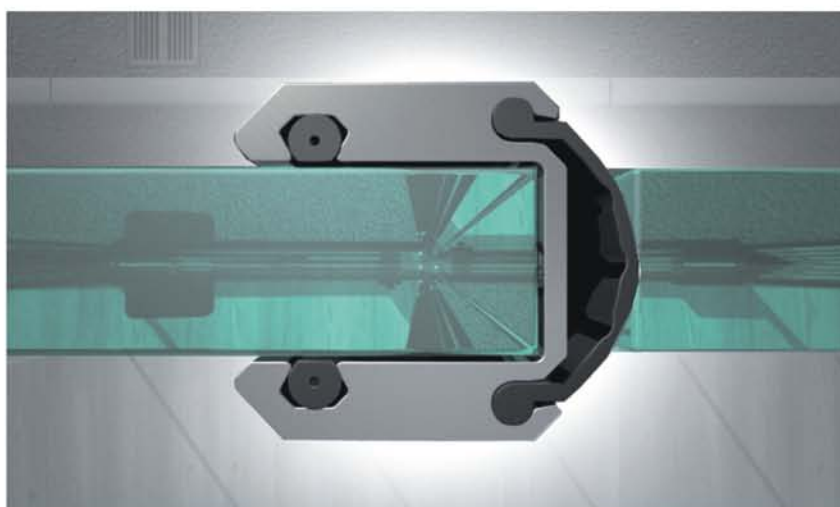

GLASSFR12



GLASSFR10



GLASSFR8

Application


GLASSTG

Features

Complementary to perimetral seals, GLASS TO GLASS can be used to make a solid and elegant junction between two glass walls. The aluminum profile has soft tubular seals on the inside. The tubular seals are used to grip on the glass, so no adhesives are required and it's possible to make fine regulations, to compensate gaps from a minimum of 4mm to a maximum of 8mm. GLASS TO GLASS is available for glasses of 10/12mm thickness and in multiple anodized finishes

Finish:


SILVER
ANODISED




STAINLESS
STEEL




SCOTCH
BRITE



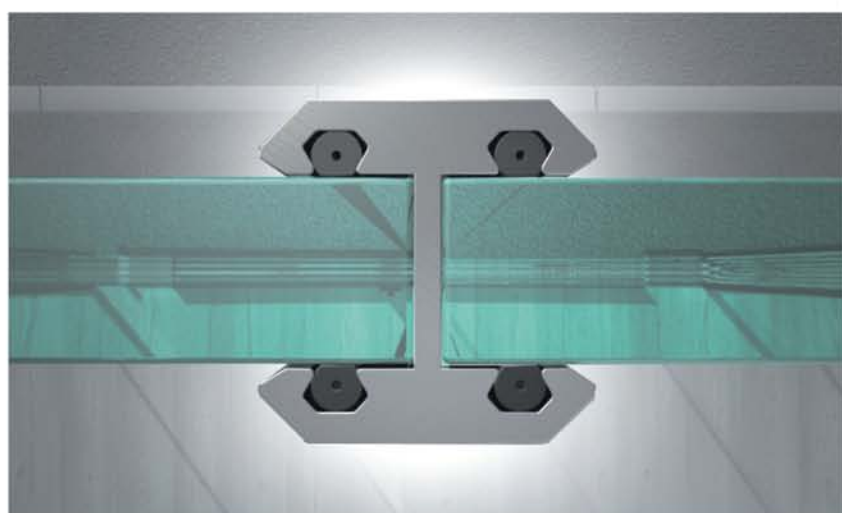
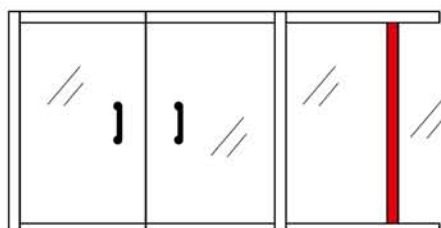
BLACK
ANODISED

Glass Thickness


GLASSTG12



GLASSTG10

Application


Project Reference



Jumeirah Gate - Marina , Dubai



The Cove - Dubai Creek Harbour, UAE



philippines Pavillion - Expo 2020, Dubai



Arab Marine Academy - Khorfakan, UAE



Arab Marine Academy - Khorfakan, UAE



Ciel Tower - Dubai Marina, UAE

Project Reference



Zayed Dialysis Center - Dubai, UAE



Municipality Community Center - Al Ain, UAE



Bloomberg Studio - IDFC, Dubai



Latifa Hospital Expansion - Al Jaddaf, Dubai



AL-Mizhar Shopping Center - Dubai, UAE



Sales Office

Euro Art (UK) LTD.
69 Staverton Road, London
NW2 5HA

Warehouse

Brittania Mills Didsbury Street
Blackburn Lancashire, BB1 3JL
United Kingdom

T.: +44 1254 433883
M.: +44 787 565 1180
E.: uk@euro-art.co.uk

Oman Sales Office

Al Ghala, Muscat
T.: +968 24 117 173
M.: +968 77 027 925
E.: oman@euro-art.co.uk

Middle East, Asia & Africa

Euro Art (Middle East) FZCO
Warehouse ZE4
Jebel Ali Free Zone
Dubai, UAE

T.: +971 4 888 6345
M.: +971 50 297 9761
E.: me@euro-art.co.uk

UAE Distribution Center

Mobility General Trading LLC
Industrial Area, Behind Al Khail
Mall, Al Quoz
Dubai, UAE

T.: +971 4 269 3832
M.: +971 50 811 9561
E.: sc@euro-art.co.uk

Design Centers

Dubai: Airport Road
T.: +971 4 295 1105
M.: +971 54 990 7059
E.: me@euro-art.co.uk

Abu Dhabi: Najda Street
T.: +971 2 564 7111
M.: +971 50 209 9786
E.: ad@euro-art.co.uk

Doha: Barwa Village
T.: +974 4 490 7530
M.: +974 7 733 5728
E.: qatar@euro-art.co.uk

www.euro-art.co.uk