



**DOOR OPENING SOLUTIONS**  
THE COMPLETE RANGE

**EuroArt (UK) Ltd**, with operations in Blackburn, UK develops and manufactures a comprehensive line of door hardware, including an extensive range of mortise locks, lever handles, cylinders, exit devices, door closers, hinges and builder's hardware.

Continuous research, new technologies and innovative design have positioned us among the world leaders of very reliable products with a high aesthetic value.

We ensure all products are tested and certified to internationally accepted industry standards issued by third party internationally recognized testing houses. Quality is incorporated in every stage of manufacture by the people behind the product. From design to machine operation, assembly and through to inspection every individual takes responsibility for their part in the design and manufacture of the product and contributes to a continuous quality control ethic. Function and form characterize the EuroArt products.

We have set up a dedicated export office with a single, challenging responsibility, to coordinate the export activities among all parts of the world. EuroArt will play a critical role in support of international architects, contractors and multinational corporations who demand the sophistication of quality product in every corner of the globe. Through specification writing, consulting and product selection we offer unmatched product solutions to meet the demands of today's modern buildings, while offering worldwide local support through our vast network of partners and distributors.

EuroArt will be proud to be given the opportunity to be your preferred leading specifier, distributor and technical service provider of architectural hardware across worldwide construction industry. In addition to superior product quality, EuroArt offers a mix of product expertise at a pricing that is unsurpassed in the global hardware industry.

Fine Buildings, whether new structures or refurbishment, will always need fine quality fittings and EuroArt will be there to provide them, now and in the future.

### **Guarantee**

To support the high quality and first class engineering that has gone into the EuroArt product range, we offer a five to ten years guarantee (subject to conditions) against defects due to faulty manufacturing, workmanship or defective material. The manufacturer agrees to replace any defective EuroArt product free of charge provided the product has been fitted in accordance with the fitting instructions and maintained correctly.

### **Technical Support**

Comprehensive information and technical support services are available by contacting:

Tel: +44 1254 433883

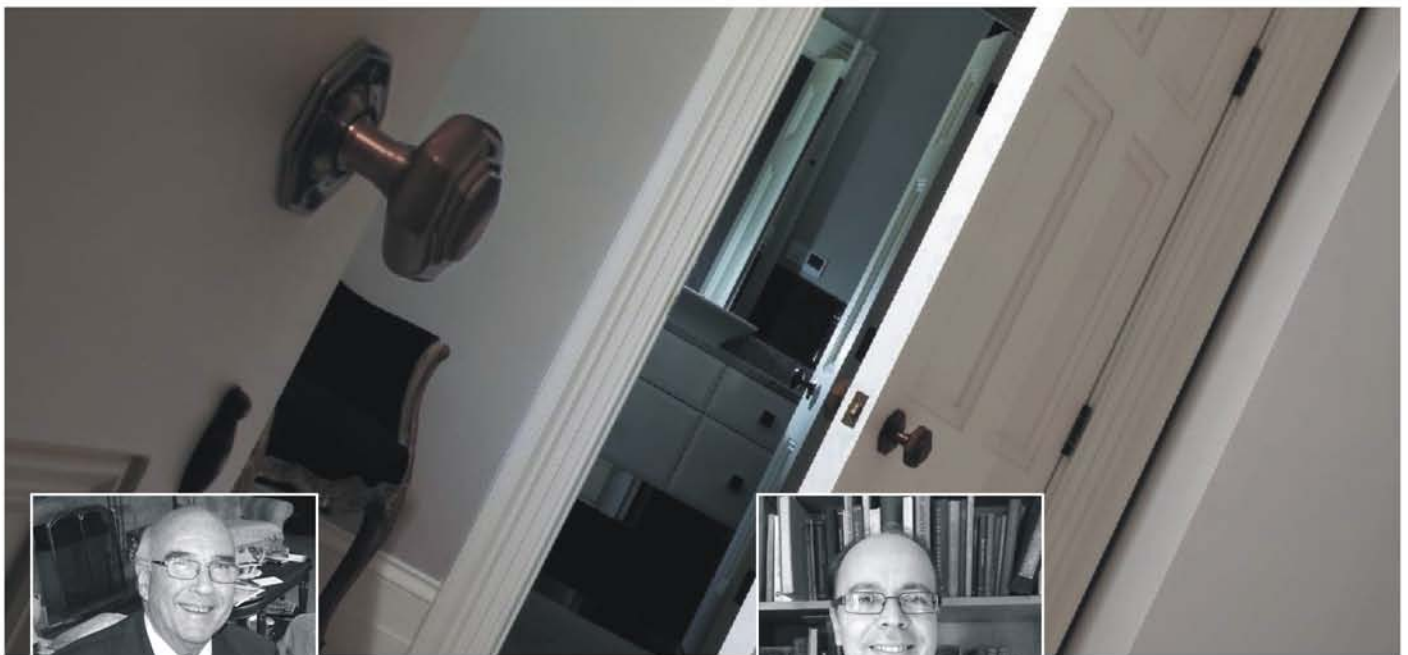
Email: [me@euro-art.co.uk](mailto:me@euro-art.co.uk)

Or visit our website

**[www.euro-art.co.uk](http://www.euro-art.co.uk)**







**Malcolm Brown**  
Honorary Chairman



**Darren Jarvis**  
Design & Specification Consultant

"Welcome to the new edition of EuroArt Architectural Hardware catalogue.

Door hardware is more than a way to open, close and secure a space. To us, it is an integral part of a design theme.

In modern buildings, aspects of design and functional convenience have to be blended, with an exquisite entrance often setting the tone.

We have focused on high quality product innovation and new technology. New products are being presented every year and the company future will be strengthened by its pioneering design abilities, its unparalleled skill base and its avant-garde production methods.

We hope you enjoy our new Architectural Hardware catalogue."

"Setting new benchmarks in customer service, design & quality, EuroArt places great importance in the construction of every product, conducting mechanical endurance, product performance and safety testing to British and internationally recognised standards. This allows a vast selection of the Group's portfolio on offer holds, a reassuring ten year guarantee.

With a great understanding for the importance of flexible, reliable and affordable solutions, at EuroArt, we make it our priority to meet demands beyond your expectations. Our ranges can be found in the finest designer hotels across Europe, Middle East and Asia, residential housing and commercial applications.

For all type of projects. we have one of the largest technical support departments in the industry with with a fully trained in house customer service team that provides an efficient one-stop solution for all your requirements."



## Our business and our values



Our environmental, social and ethical responsibilities:

EuroArt is committed to environmental leadership in all of our business activities from operations to product design and recycling solutions. EuroArt's corporate policy on environmental affairs is supported by the company's global environmental management system, which is key to our efforts to achieve results consistent with environmental leadership and ensures the company is vigilant in protecting the environment across all of our operations worldwide.

Just as EuroArt is dedicated to providing innovative design and technologies, we are equally devoted to ensuring that our products, employees, sites and suppliers are following the commitments we have made to socially responsible business practices.

EuroArt embraces the values of customer service, innovative and entrepreneurial spirit, and integrity. We seek to integrate these core values into every aspect of our business and into policies and procedures in areas of quality and safety for products, employee welfare, managing a global supply chain, ethical corporate behavior, social investments and environmental affairs.

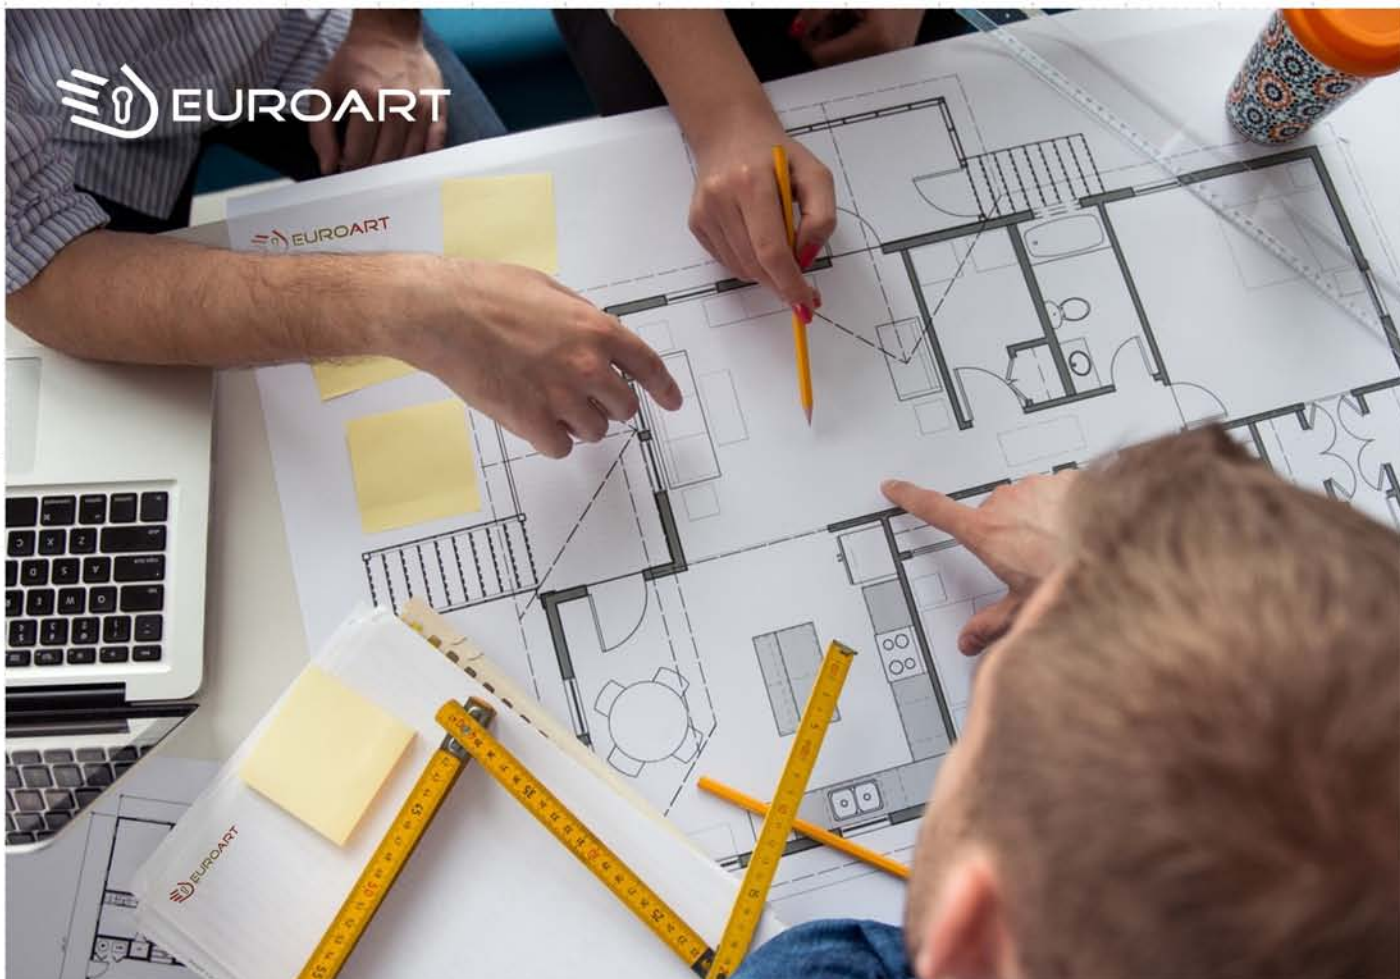
## Building on Relationships



**Since the mid-1980s, we have been associated with supply and distribution of high quality architectural ironmongery products and services to UK construction industry.**

EuroArt is committed to the highest standards of integrity and responsibility when working with all stakeholders. We are committed to being a responsible and active corporate citizen, consistently working to improve its business while contributing to the development of society. The company embraces the values of customer satisfaction, innovation, operational excellence and trustworthiness. EuroArt seeks to integrate these core values into every aspect of its business.

By working with EuroArt, you will have access to a whole network of specialist knowledge and product excellence.



## Hardware Scheduling & Specification Services

### Key Considerations When Specifying Door Hardware:

#### **Type of Building:**

Important to know functional considerations. School, Hospital, Elderly homes will need fittings appropriate for vulnerable users. Security and safety requirements also vary between type of building. Heavy duty hardware suggested for building which will have high pedestrian traffic.

#### **Function of Door:**

Is the door to be hold-open, self closing, latched, emergency exit? Door ironmongery is the building's most touchable aspect which comes into contact on a constant bases.

#### **Style of Building:**

Aesthetics is generally a major consideration for most architects/designers to ensure the door hardware enhances & complements the finished project.

#### **Materials & Finishes:**

Architectural Ironmongery is available in wide selection of material like stainless steel, brass, iron, aluminium etc and finish like SSS, PSS, Polished or Satin Brass etc.

#### **Budget for Hardware Set:**

An approximate figure for architectural ironmongery budget is helpful to propose appropriate door hardware, FOH and BOH areas can have different budgets in a public building. This will assist the ironmonger to provide with a "Cost per Door" figure.

EuroArt proudly offer all our customer free specification writing and consulting service which include but are not limited to following:

- Finishing Hardware Schedules or sets.
- Hardware Specifications.
- Bespoke products, designed and manufactured.



# One Stop Solution!

EuroArt brings to the table a comprehensive range of door hardware for metal, wood and glass doors together with fittings for wardrobe, kitchen and lighting solutions. We offer the following three product lines to create the One-Stop Solution for all your door hardware & furniture fitting requirements:



## ARCHITECTURAL HARDWARE

- Lever Handles & Knobs
- Pull Handles
- Locks & Latches
- Cylinders
- Hinges
- Door Closers
- Panic Hardware
- Electro-mechanical Products
- Accessories
- Sliding & Folding Door Gear
- Intumescent Seals



## FURNITURE FITTINGS

- Hinges & Flap Stay
- Furniture Lighting
- Drawer System (Runners & Drawer Boxes)
- Cabinet Locking System
- Kitchen Fittings & Accessories
- Wardrobe Fittings
- Wardrobe Sliding System
- Pop-up Socket & TV Lift-up
- Furniture Handles & Knobs
- Furniture Accessories



## GLASS HARDWARE

- Floor Spring with Cam Motion Technology
- Hydraulic Patches
- Hydraulic Hinges
- Patch Fittings
- Pivot System
- Pull Handle
- Lockset & Hinges
- Shower Hinges & Connectors
- Knobs & Towel Bars
- Sliding System
- Support Bars & Brackets
- Automatic Door Bottom
- Sealing Strips





## Material and Finishes

**Stainless Steel** is an excellent choice for architectural hardware because its surface is highly corrosion resistant, rarely shows scratches and knock marks, is extremely hard-wearing even when in regular use and very easy to maintain. EuroArt SS products are manufactured from SS Grade 304 as standard **Products can also be manufactured from Grade 316 stainless steel on special order.**

SS is mostly used for hinges, lever and pull handles, accessories like stoppers, flush bolts, hooks etc.

SS Hardware do not really need any looking after at all. Dirt marks can be cleaned with a damp cloth. An occasional washing with a solution of water and 5% mild detergent followed by a water rinse and drying using a clean soft rag is normally sufficient for normal maintenance.

**Brass** has been used since centuries for manufacture of decorative elements and accessories for door. It is valued for its high strength, easy workability, resistance to corrosion and its excellent corrosive resistance and its joining, plating, polishing and finish its attractive appearance. The advantages of brass for architectural application including characteristics. Brass is mostly used for lever and pull handles, cylinders, flush bolts, shower door hinges and sanitary fittings.

The best way to clean lacquered brass is to remove surface dust with soft cloth and then use a mild solution of soapy warm water to clean sticky or dirty marks. Once clean, thoroughly dry with a soft cloth. An occasional light application of a good quality wax will assist in keeping the finish in good condition.

**Zinc Alloy** products because of application flexibility, high ductility, castability and resistance increases the possibility of use in the die-casting process and provide great flexibility in design of parts and components. It can be used for precision casting as well as to facilitate the execution of surface finishes and offers excellent plating characteristics. It is mostly used for lever handles which are cheaper and lighter than brass.

**Aluminium** is generally used to manufacture sliding door tracks, profile handles and door closer body. It can be powder coated or anodized to any RAL finish.

Surface finishing procedures used for architectural hardware are Physical Vapor Deposition (PVD), electroplating and powder coating. EuroArt products can also be supplied with anti-microbial coating which can inhibit microbial growth and reproduction on the surface.


**Note : Final finish may vary for different base material\***

## Key to Finishes...


**PB/PVD** Polished Brass PVD

**SB/PVD** Satin Brass PVD

**SCG/PVD** Satin Champagne Gold PVD

**BL/PVD** Matt Black PVD

**DU/PVD** Dark Umber PVD

**GM/PVD** Gun Metal PVD

**GPH/PVD** Graphite PVD

**BSG/PVD** Brushed Sherry Gold PVD

**FNB/PVD** Fused Nickel Bronze PVD

**PRG/PVD** Polished Rose Gold PVD

**SRG/PVD** Satin Rose Gold PVD

**IB/PVD** Imperial Bronze PVD

**SSS** Satin Stainless Steel

**PSS** Polished Stainless Steel

**MBL** Matt Black

**AB** Antique Brass

**MAB** Matt Antique Brass

**BRZ** Bronze

**PB** Polished Brass

**SB** Satin Brass

**PC** Polished Chrome

**PN** Polished Nickel

**SN** Satin Nickel

**MSN** Matt Satin Nickel




**CE MARKING**

CE Marking is a mandatory conformance mark on products placed on the market. With the CE marking on a product, the manufacturer ensures that the product is in conformity with the essential requirements of the applicable Construction Products Directive.


**FIRE DOORS HARDWARE**

Suitable for use on fire doors.


**CERTIFIRE**

CERTIFIRE is an independent third party certification scheme that assures performance, quality, reliability and traceability of fire protection products.


**HANDICAP**

Suitable to meet the needs of disabled people.



BS EN 1906

**BS EN1906**

BS EN1906 is the British/European standard requirement for lever handles and knob furniture.



BS EN 12209

**BS EN12209**

BS EN12209 is the British/European standard requirement for locks, latches and locking plates.



BS EN 1303

**BS EN1303**

BS EN1303 is the British/European standard requirement for cylinders for locks.



BS EN 1935

**BS EN1935**

BS EN1935 is the British/European standard requirement for single axis hinges.



BS EN 1154

**BS EN1154**

BS EN1154 is the British/European standard requirement for controlled door closing devices.



BS EN 1125

**BS EN1125**

BS EN1125 is the British/European standard requirement for panic exit devices operated by a horizontal bar



BS EN 8424

**BS EN8424**

BS EN8424 is the British/European standard requirement for pull handles


**ISO 9001:2008**

ISO 9001:2008 Registered Company



10 Year Mechanical Guarantee



5 Year Mechanical Guarantee



# Certifications



**interface**  
www.interface-nrm.co.uk

## Certificate of Registration

QUALITY MANAGEMENT SYSTEM  
BS EN ISO 9001:2015

*This is to certify that:*

**EURO ART (UK) LTD**  
Unit C Britannia Mill  
Didsbury Street  
Blackburn  
BB1 3JL  
United Kingdom

Holds Certificate No: **5083**  
and operates a Quality Management System which complies with the requirements of ISO 9001:2015 for the following scope:

**Supply of Architectural Ironmongery**

For and on behalf of Interface NRM Ltd:

  
Dr. Gavin Jordan  
Director, Interface NRM Ltd.


  
**ISO 9001**  
 CERTIFICATION



Originally Registered: **19/01/2017**    Latest Issue: **19/12/2019**    Expiry Date: **16/01/2023**

This certificate remains the property of Interface NRM Ltd and is bound by conditions of contract and our terms of use.  
Certification can be validated by emailing [info@interface-nrm.co.uk](mailto:info@interface-nrm.co.uk)  
Interface NRM Limited, e-Innovation Centre, University of Wolverhampton  
Phoenixes, Telford, Shropshire, TF2 9FT, United Kingdom. Tel: 01902 288325  
[www.interface-nrm.co.uk](http://www.interface-nrm.co.uk)

  
Page 2 of 3



**warrington**  
certification

**Certificate of constancy of performance**


**1121-CPR- AG5159**  
Produced for  
**Euro Art (UK) Ltd**  
69, Staverton Road  
London  
NW2 5HA  
and produced in the manufacturing plant  
**J1082**

This certificate attests that all provisions concerning the assessment and verification of constancy of performance and the performance described in Annex ZA of the standard(s)

**EN 12209:2003/AC 2005**  
under system 1 of AVCP are applied and that  
**the product fulfils all the prescribed requirements set out above.**

This certificate was first issued on 02/08/17 and will remain valid to the date given below as long as the test methods and/or factory production control requirements included in the harmonised standard, used to assess the performance of the declared characteristics, do not change, and the product, and the manufacturing conditions in the plant are not modified significantly.

Valid to: 01/08/2023

  
Paul Duggan  
Certification Manager

**CE**

Exeme (UK) Limited trading as Warrington Certification  
Holmesfield Road, Warrington, Cheshire, WA1 2DS, UK

Page 2 of 2



**Guild of Architectural Ironmongers**

## CERTIFICATE OF MEMBERSHIP

*This is to certify that*


**Euro-Art Middle East FZCO**

is a Full Member of the  
Guild of Architectural Ironmongers  
1<sup>st</sup> April 2023 – 31<sup>st</sup> March 2024

  
 President  
 Guild of Architectural Ironmongers


  
 Chief Executive  
 Guild of Architectural Ironmongers

Guild of Architectural Ironmongers  
9th Floor, 666 Piccadilly  
Regent Street, London W1A 3AB  
T: +44 (0)20 7553 2885 E: [info@gaif.org.uk](mailto:info@gaif.org.uk)  
[www.gaif.org.uk](http://www.gaif.org.uk)



**element**

**BSEN 12209:2003**




**TESTS OF MECHANICALLY OPERATED LOCKS AND STRIKE PLATES**

A Report To: **Euro Art (UK) Ltd**  
69 Staverton Road  
London  
NW2 5HA

Document Reference: **WL 518131**

Date: **04/08/2022**  
Copy: **Final**  
Issue No.: **1**  
Page **1**

Element Materials Technology Weymouth Limited  
Registered in England & Wales  
Registered Office: 3rd Floor, Cannon Building, 5 Southampton Street, London, WC2E 7HA  
Company Registration No: 11448650

  
0821



certifire

CERTIFICATE OF APPROVAL  
No CF 5574

This is to certify that, in accordance with  
T500 General Requirements for Certification of Fire Protection Products  
The undermentioned products of

EURO ART (UK) LTD

69 Staverton Road, London, NW2 5HA  
Tel: +44 208 4592326

Have been assessed against the requirements of the Technical Schedule(s)  
denoted below and are approved for use subject to the conditions  
appended hereto:

CERTIFIED PRODUCT  
Range of Mortice Locks and  
Latches

TECHNICAL SCHEDULE  
TS23 The Contribution of  
Locks and Latches to The  
Performance of Fire Resisting  
Doorsets

Signed and sealed for and on behalf of Warringtonfire Testing and Certification Limited

Paul Duggan  
Certification Manager



Issued: 11<sup>th</sup> September 2017  
Re-issued: 8<sup>th</sup> October 2022  
Valid to: 7<sup>th</sup> October 2027



Page 1 of 8

This certificate is the property of Warringtonfire Testing and Certification Limited  
Registered in England and Wales  
Registered Office: 3rd Floor, Devonian Building, 5 Southampton Street, London, WC2E 7RH. Company Registration No: 11371406

7/5/2018

Q90UK38497 - Fire-exit Hardware



ONLINE CERTIFICATIONS DIRECTORY



UL Product iQ  
UL'S NEXT GENERATION CERTIFICATIONS SEARCH  
The same trusted data in a modern search engine.

NOW  
AVAILABLE  
LEARN MORE

GXXH.R38497  
Fire-exit Hardware

View Summary

Fire-exit Hardware

See General Information for Fire-exit Hardware

EURADY (UK) LTD

R38497

56, Standon Road, Parsloes  
London, NW10 6EU UNITED KINGDOM

The following devices have been examined in accordance with UL 10C:

Item type: Models R38021, R38031.

Surface-mounted vertical rod type, Models R38044, R38054.

Last updated on 2015-09-12

Overview? Product Risk Index Terms of Use Privacy Policy

© 2018 UL LLC

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Assessments, Contributions, Designs, Systems, and/or Certifications (ULI) shall be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings); 2. The statement "Reprinted from the Online Certification Directory with permission from UL" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "© 2018 UL LLC".

Evidence of Performance

Criteria for tests as per EN 13001: 2015-08

Expert Statement  
18-004333-PR07  
(SAR-024-F1-000-01)



Client: Euro Art (UK) Ltd  
69 Staverton Road  
NW2 5HA London  
United Kingdom

Product: Profile cylinder (CYD060-CYD120)  
Double cylinder (CYD060-CYD120)  
Key and turn cylinder (CYD060-CYD095)  
Single cylinder (CYD145-CYD155)

Performance: Cylinder length: different length see Typical  
Cylinder housing material: Brass  
Cylinder plug material: Brass  
Cylinder plug diameter: 12.9 mm  
Product designation: Profile cylinder with 6  
detainers

Notes: Classification according to EN 13001: 2015-08

Category of use	Duration	Door mass	Fire resistance	Safety	Corrosion resistance and sample testing	Key resistance	Attack resistance
1	8	8	8	8	8	4	8

ift Rosenheim  
24.10.2019

H. Jorgensen  
Head of Testing Department  
Security/Security Testing

J. Jorgensen  
Deputy Head of Testing Department  
Security/Security Testing

Warringtonfire Testing and Certification Limited  
3rd Floor, Devonian Building, 5 Southampton Street, London, WC2E 7RH. Company Registration No: 11371406

certifire

CERTIFICATE OF APPROVAL  
No CF 5817

This is to certify that, in accordance with  
T500 General Requirements for Certification of Fire Protection Products  
The undermentioned products of

EURO ART (UK) LTD

69 Staverton Road London NW2 5HA  
TEL: +44 208 4592326

Have been assessed against the requirements of the Technical Schedule(s)  
denoted below and are approved for use subject to the conditions  
appended hereto:

CERTIFIED PRODUCT

Euro Art DC9024 Surface  
Mounted Overhead Door  
Closers and DC8524,  
DC8024 Concealed Door  
Closers

TECHNICAL SCHEDULE

TS 34 - The Contribution Of  
Controlled Door Closing  
Devices And Accessories To  
Fire Resisting Doorsets

Signed and sealed for and on behalf of Warringtonfire Testing and Certification Limited

Paul Duggan  
Certification Manager



Issued: 4<sup>th</sup> December 2019  
Re-issued: 15<sup>th</sup> September 2022  
Valid to: 29<sup>th</sup> July 2027



Page 1 of 5

This certificate is the property of Warringtonfire Testing and Certification Limited  
Registered in England and Wales  
Registered Office: 3rd Floor, Devonian Building, 5 Southampton Street, London, WC2E 7RH. Company Registration No: 11371406

# What's Inside

<b>SS LEVER HANDLES &amp; KNOBS</b>	<b>14 - 63</b>
<b>SS PULL HANDLES</b>	<b>64 - 77</b>
<b>SIGNATURE SERIES</b>	<b>78 - 166</b>
<b>LOCKS &amp; LATCHES</b>	<b>167 - 181</b>
<b>CYLINDERS</b>	<b>182 - 188</b>
<b>HINGES</b>	<b>189 - 195</b>
<b>3D CONCEALED HINGE</b>	<b>196 - 203</b>
<b>DOOR CLOSERS</b>	<b>204 - 227</b>
<b>FLOOR SPRING &amp; ACCESSORIES</b>	<b>228 - 234</b>
<b>PANIC HARDWARE</b>	<b>235 - 238</b>
<b>ACCESSORIES</b>	<b>239 - 258</b>
<b>DOOR SLIDING SYSTEM</b>	<b>259 - 262</b>
<b>AUTO DOOR BOTTOM &amp; INTUMESCENT KITS</b>	<b>263 - 265</b>



Door handles are a prominent design feature in any project and EuroArt appreciates the importance in choosing the right handle to suit your design, specification and budget.

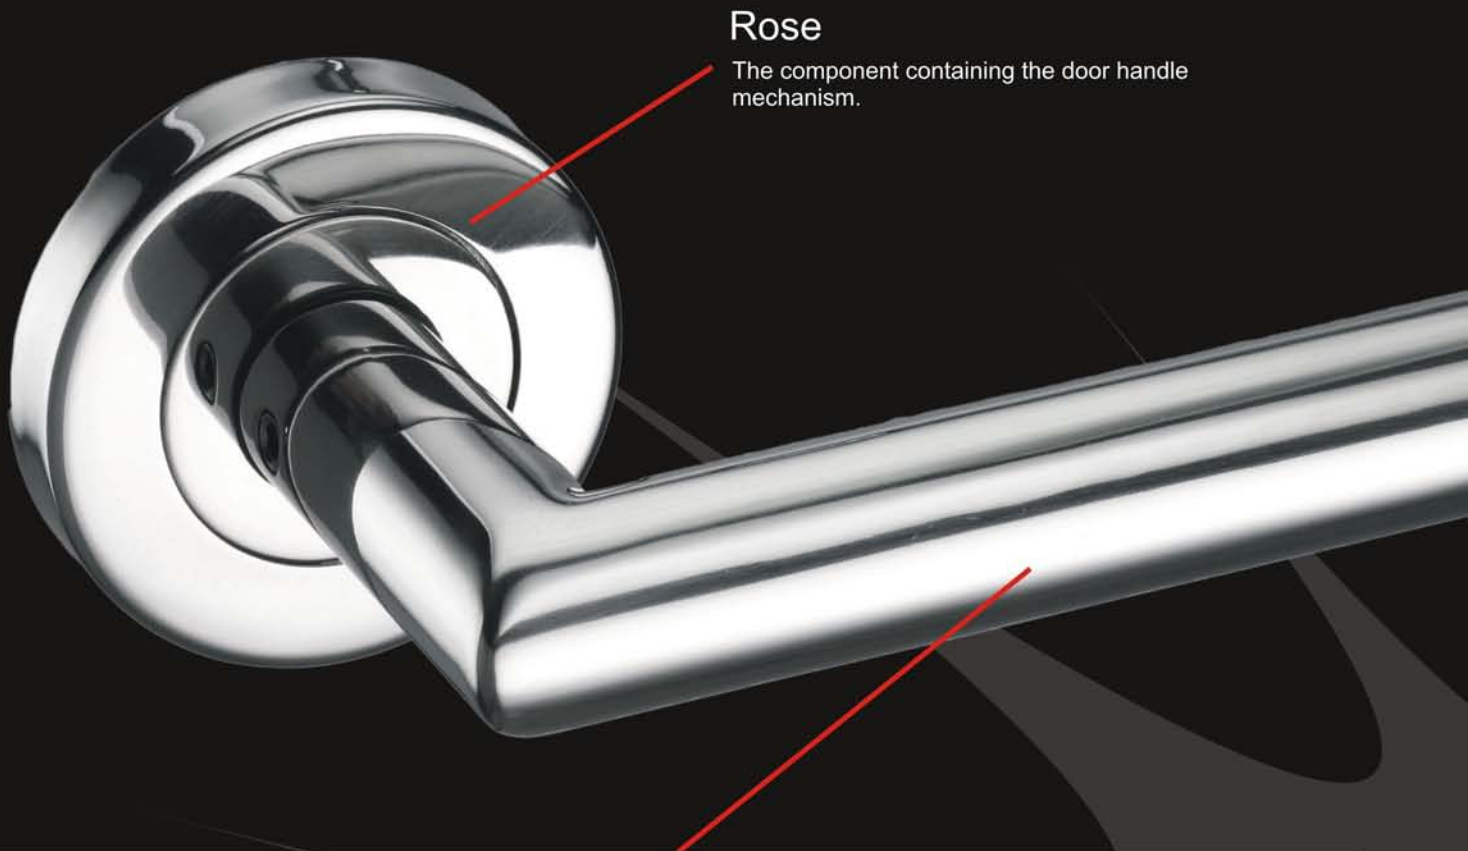
The EuroArt range of stainless steel door furniture is ideal for the majority of applications, suitable for use in contract, public, commercial, institutional and residential buildings. Characteristics such as longevity and corrosion resistance have established stainless steel as popular material in the manufacture of architectural fittings.

The EuroArt Series of lever furniture is a wide selection of excellent value stainless steel sprung and unsprung handles, ideal for all projects where design or quality cannot be compromised. The EuroArt Series of lever furniture is a range of premium, tubular & solid stainless steel furniture with metal cassette construction tested to 200,000 cycles.

EuroArt also offer a range of stainless steel pull handles and stainless steel accessories.

## Features and Functions

The following diagram gives an overview of the main features and functions of a EuroArt stainless steel lever handle.



### Rose

The component containing the door handle mechanism.

### Handle

#### **Sprung**

Lever handles that are spring loaded. This will enable the handle to return to the horizontal position after use, independent of any spring action in the lock.


#### **Unsprung**

Handles that operate without the assistance of a spring, but rely on the sprung follower within the lock case to return to the horizontal position

#### **Non – handed**

All EuroArt stainless steel door furniture is nonhanded, meaning the product can be used universally on either the left or right hand side of the door.

EuroArt stainless steel door furniture is available in a variety of designs. Please check each individual specification sheet for measurements.

If you require a product that assists in fulfilling specifications required under the Disability Discrimination Act (DDA), these products are denoted by the following symbol: 

## LRS 950 & 970 Series - Stainless Steel Lever on Ball Bearing Rose - 4mm

Modern, Contemporary 4mm Ball Bearing Rose

Page no. 21 - 25



LRS951



LRS952



LRS953



LRS954



LRS955



LRS956



LRS971



LRS972



LRS973



LRS973/R



LRS974



## Escutcheon & Thumbturn - 950 Series

Page no. 25

E-311



E-321



E4/5-411



E4/5-421



## LRS 900 Series - Stainless Steel Lever on Unsprung Rose - 4mm

Modern, Contemporary 4mm Slim-line rose | Ergonomic Design | Heso Spindle | Tested to 200,000 Cycles

Page no. 26

LRS901



LRS903 



## Escutcheon & Thumbturn - 900 series

Page no. 26

EES901



TRS904 / TRS904i



## LRS 800 & 600 Series - Designer Stainless Steel Lever on Square Rose

10mm Split Style Insert Rossette | SS 304 Inner rose | Bolt through fixings and SS 304 screws supplied

Page no. 27 - 31

LRS801



LRS802



LRS803



LRS804



LRS807



LRS601



LRS602



LRS603



LRS606



LRS607



LRS608



## Escutcheon & Thumbturn - 800 & 600 Series

Page no. 31

EES601



TRS604



## LRS 500 Series - Designer Stainless Steel Lever on 6mm Threaded Sprung Rose

6mm Sprung covered rose | SS 304 Inner rose | Bolt through fixings and SS 304 screws supplied

Page no. 32

LRS501



LRS504



## Escutcheon & Thumbturn - 500 series

Page no. 32

EES501



TRS504





## LRS 400 Series - Solid Stainless Steel Lever on Square Rose

8mm Sprung covered rose | SS 304 Inner rose | Bolt through fixings and SS 304 screws supplied

Page no. 33 - 35

LRS410



LRS412



LRS416



LRS417



LRS418



LRS420



LRS421



LRS422



LRS423



## LRS 400 Series - Designer Stainless Steel Lever on Square Rose

8mm Sprung covered rose | Bolt through fixings and SS 304 screws supplied

Page no. 36 - 38

LRS401



LRS402



LRS405



LRS406



LRS408



LRS415



LRS419



## Escutcheon & Thumbturn - 400 series

Page no. 38

EES401



BES404



TRS404 / TRS404i



## LRS 300 Series - Stainless Steel Lever

8mm Sprung covered rose | SS 304 Inner rose | Bolt through fixings and SS 304 screws supplied

Page no. 39 - 43

LRS301



LRS302



LRS303



LRS304



LRS307



LRS308



LRS309



LRS310



LRS311



LRS314



LRS315



LRS316



## LRS 200 Series - Investment Cast Solid Stainless Steel Lever

8mm Sprung covered rose | SS 304 Inner rose | Bolt through fixings and SS 304 screws supplied

Page no. 44- 51

LRS201 - **SOLID** 



LRS202



LRS203



LRS204



LRS207



LRS208



LRS210



LRS211



LRS212



LRS213



LRS215



LRS219



LRS220



LRS222



LRS224



LRS230



LRS232



LRS233





LRS234



LRS235



LRS236



LRS237



LRS238



LRS239



## LRS 100 Series - Tubular Lever on Rose

8mm Sprung covered rose | SS 304 Inner rose | Bolt through fixings and SS 304 screws supplied

Page no. 52 - 55

LRS101  
LRS101/22


LRS102



LRS103



LRS104



LRS105



LRS106



LRS107



LRS110



LRS114



LRS151



LRS152



LRS153



## Escutcheon & Thumbturn - 100, 200 & 300 series

Page no. 56

EES001



BES002



NES003



TRS004/TRS004i



TRS005i



TRN006/TRN006i



## Grade 4 SS Lever Handle

Page no. 57

G4L 101



## D Handle on Plate

Page no. 58

LBS701



LBS702



LBS703



LBS705



## Stainless Steel Handle on Backplate

Material Grade 304 Stainless Steel

Page no. 59- 60

LBS707



LBS709



LBS711



LBS712



LBS713



LBS714



## Stainless Steel Knobs

8mm Sprung covered rose | Available as Fixed Knob | Bolt through fixings

Page no. 61

MKS201/MKS202



MKS205



MKS210



MKS215/MKS216



## Cylindrical Knobset

Page no. 62

SCPL60 - SCEL60





## Features

- A unique fixing method that provides a firm positive, and highly durable installation.
- Prevents progressive drooping.
- 4mm rose with concealed bearing technology.
- Anti-friction technology.
- Special roller race ball bearing.
- Noiseless.



**BS EN 1154** Classification

4	7	-	1	0	4	1	U
---	---	---	---	---	---	---	---

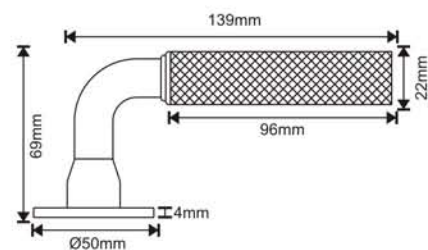


Unsprung lever ball bearing on 4mm rose

**LRS951**

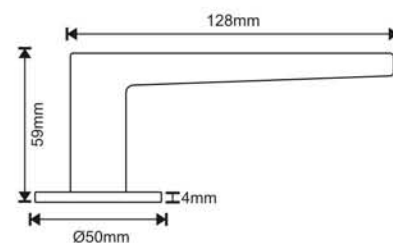

SCG/PVD

Finish: SSS, SCG/PVD


**LRS952**

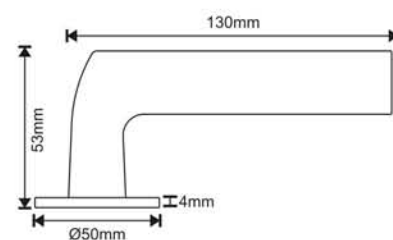

BL/PVD

Finish: SSS, BL/PVD

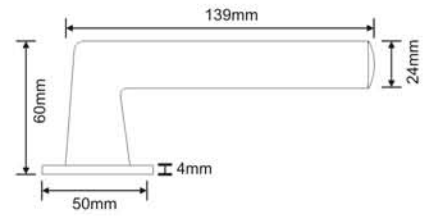
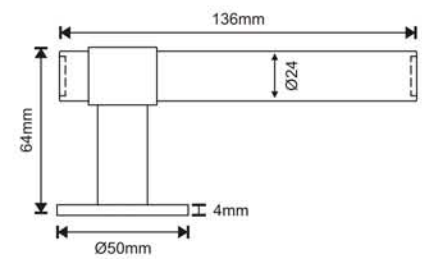
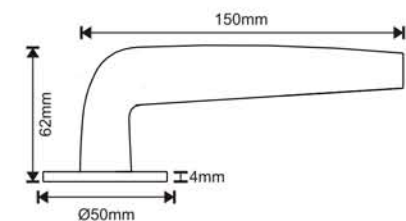

**LRS953**

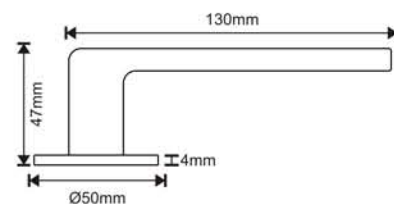
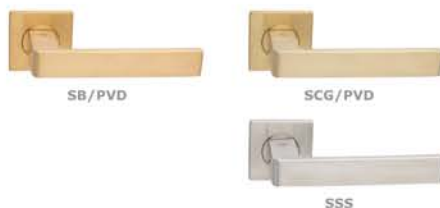

SCG/PVD

Finish: SSS, SCG/PVD

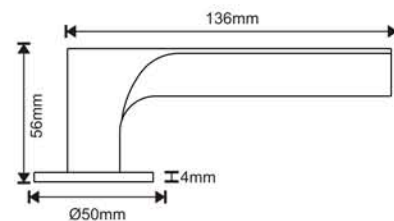




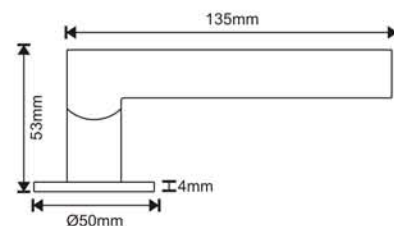
**LRS954**

**Finish: SSS, SCG/PVD, BL/PVD**
**LRS955**

**Finish: SSS, SCG/PVD, BL/PVD**
**LRS956**

**Finish: SSS**

**LRS971**


Finish: SSS, SB/PVD, SCG/PVD, BL/PVD

**LRS972**


Finish: SSS, BL/PVD

**LRS973**


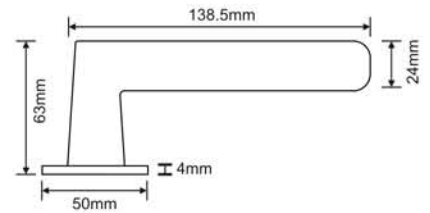
Finish: SSS, SCG/PVD, BL/PVD



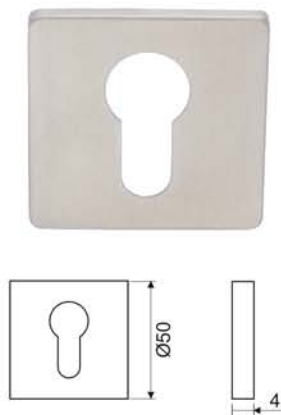
**LRS974**


SSS

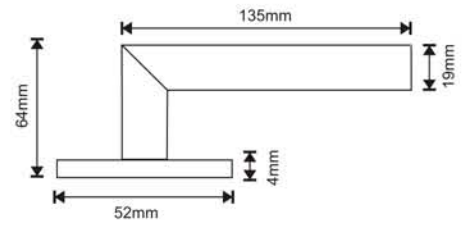
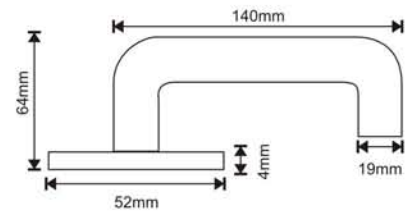
BL/PVD


**Finish: SSS, SCG/PVD, BL/PVD**
**Escutcheon & Thumbturn - 4mm Bearing Rose**
**E-311**
**Euro Profile Escutcheon**

**E4/5-411**
**Thumbturn and Release without indicator**
**E4/5-411i**
**Thumbturn and Release with indicator**

**E-321**
**Euro Square Escutcheon**

**E4/5-421**
**Thumbturn and Release without indicator**
**E4/5-421i**
**Thumbturn and Release with indicator**

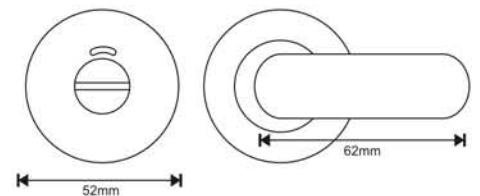
**Finish: SSS, SB/PVD, SCG/PVD, BL/PVD**

**LRS901**

**Finish: SSS**
**LRS903**

**Finish: SSS**
**TRS904**

Thumbturn and Release Without Indicator

**TRS904i**

Thumbturn and Release With Indicator


**Finish: SSS**

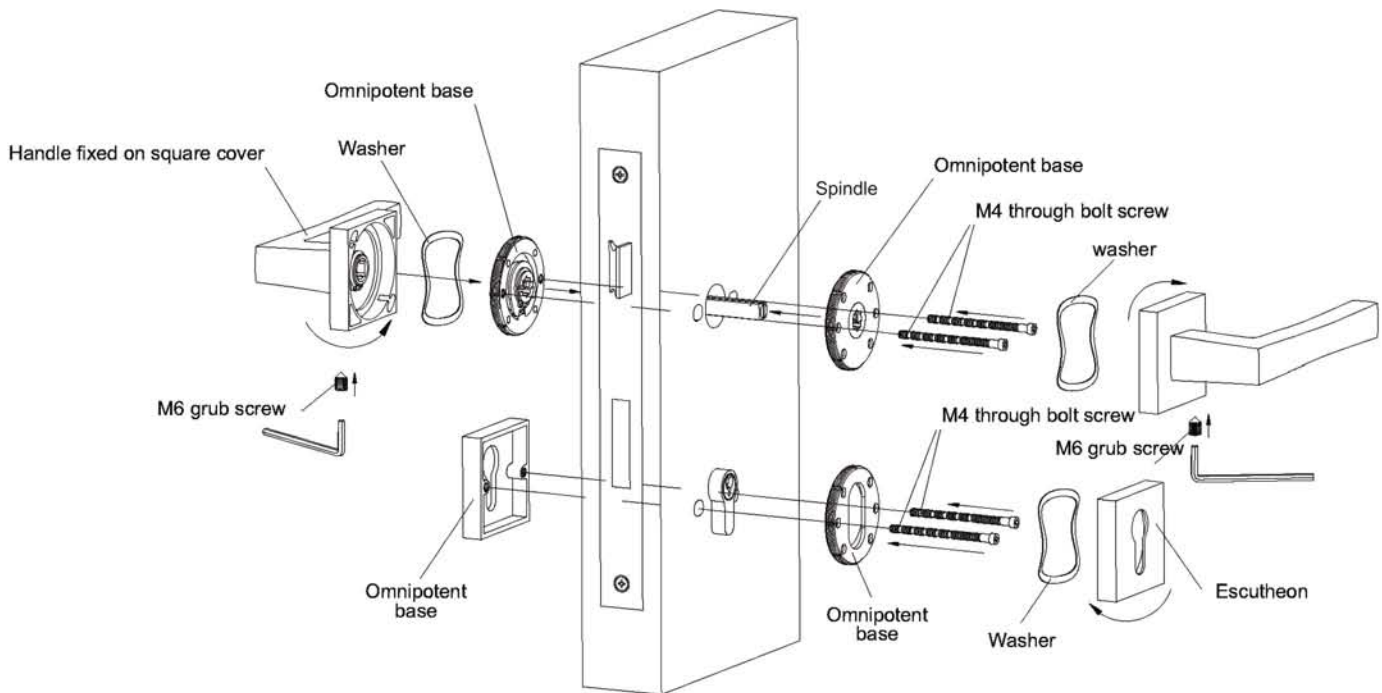


# Introduction - LRS800 and LRS600 Series

Dedicated to bring to you the cutting edge design and innovation to meet the demand of today's modern interior schemes, be inspired by our latest collection of door furniture.

## Features

- Grade 304 Stainless Steel.
- Square Cover with threads.
- Spring loaded stainless steel inner rose.
- Designed for big shank handles.
- Suitable for use on fire/smoke door assemblies.



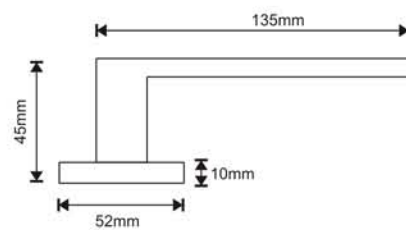
## Excellence in Design

LRS800 & LRS600 Series range of solid stainless steel lever handles on square rose is famed for excellence in design that we continually strive for. A highly distinguishable range, we have created a comprehensive and functional collection to suit all environments that does not compromise design quality.

Meticulously crafted using superior production techniques, discover our range for a harmonious interior scheme.

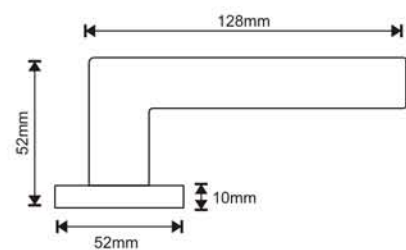
**LRS801**


BL/PVD

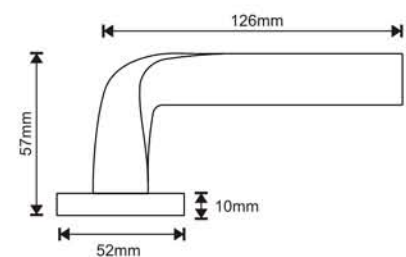

**Finish: SSS, BL/PVD**
**LRS802**

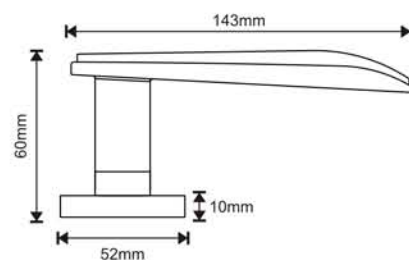
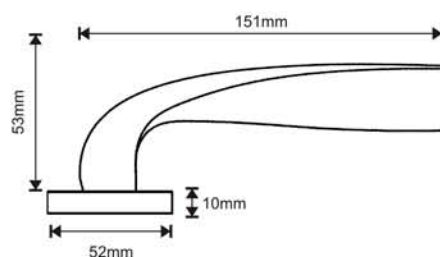
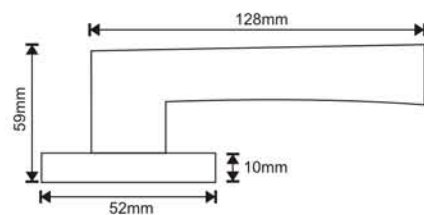

PSS

BL/PVD

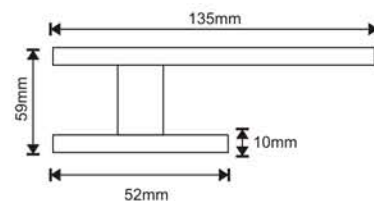
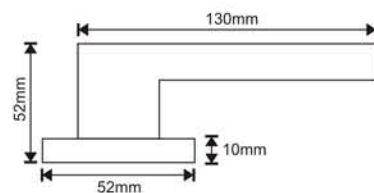
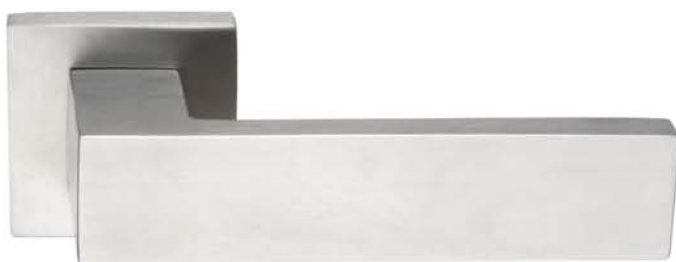

**Finish: SSS, PSS, BL/PVD**
**LRS803**


PSS

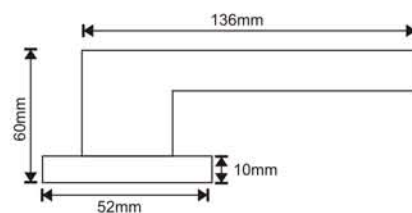

**Finish: SSS, PSS**

**LRS804**

**Finish: SSS**
**LRS807**

**Finish: SSS**
**LRS601**

**Finish: SSS**



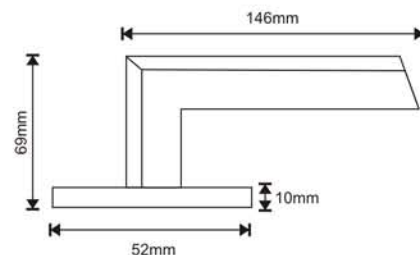
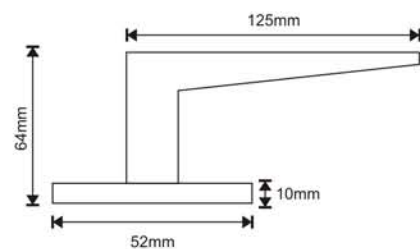
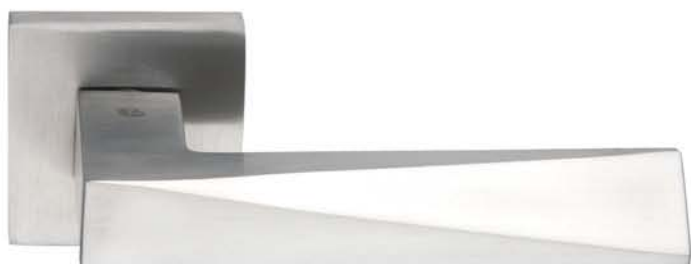
**LRS602**

**Finish: SSS**
**LRS603**

**Finish: SSS**
**LRS606**


BL/PVD



**Finish: SSS, BL/PVD**

**LRS607**



SB/PVD

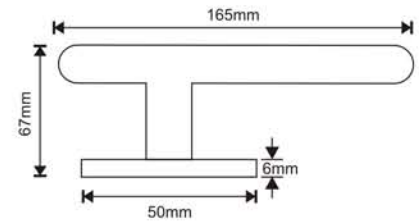

**Finish: SSS, SB/PVD**
**LRS608**

**Finish: SSS**
**Escutcheon & Thumbturn - 600 & 800 series**
**EES601**

Euro Profile Square Escutcheon

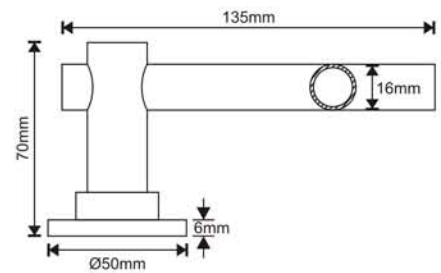

**TRS604**

Thumbturn &amp; Release


**Finish: SSS, PSS, SB/PVD, BL/PVD**

**LRS501**


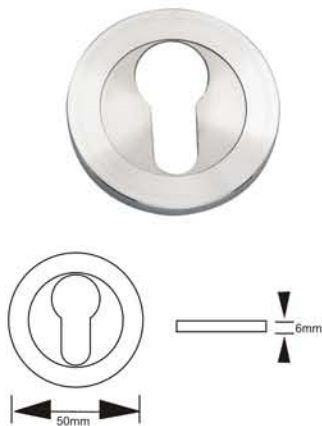
**Finish:** SSS, SB/PVD, SCG/PVD

**LRS504**


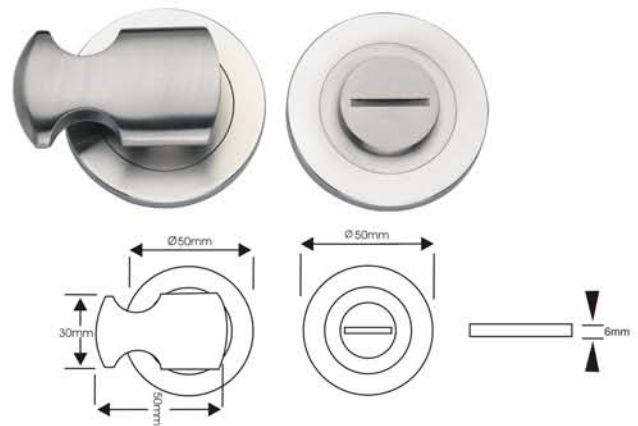
**Finish:** SSS

**Escutcheon & Thumbturn - 500 series**

• 6mm threaded escutcheon • SS 304 Inner rose

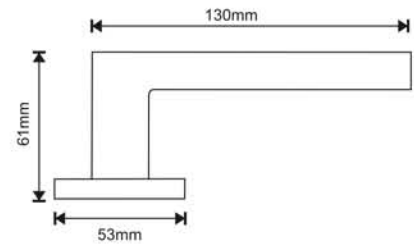
**EES501**  
Euro Profile Escutcheon


**Finish:** SSS, SB/PVD, SCG/PVD

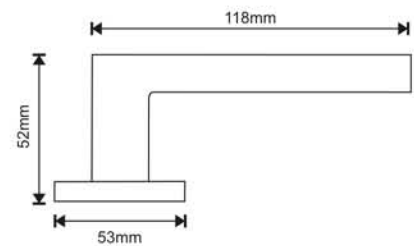
**TRS504**  
Thumbturn and Release


**Finish:** SSS, SB/PVD, SCG/PVD

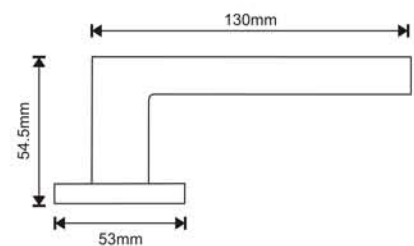


**LRS410**


**Finish : SSS, BL/PVD, SB/PVD**

**LRS412**


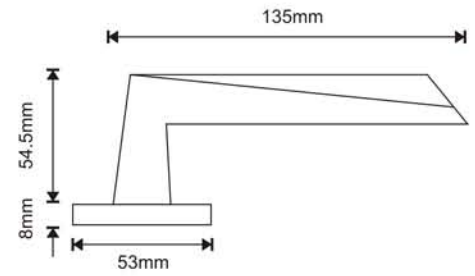
**Finish : SSS, BL/PVD**

**LRS416**


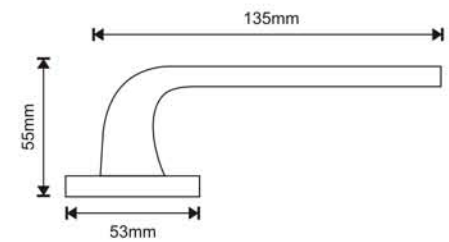
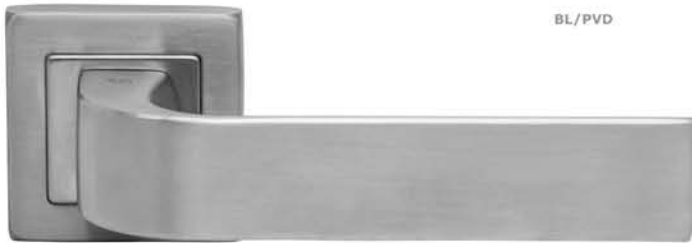
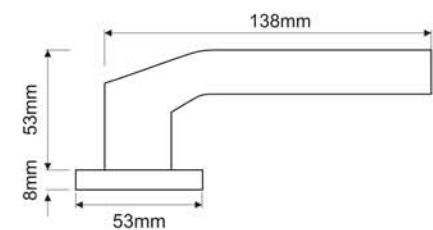
**Finish : SSS**

**LRS417**


SB/PVD

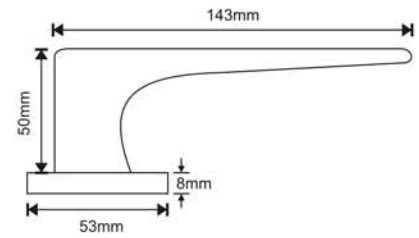

**Finish : SSS, SB/PVD**
**LRS418**


BL/PVD


**Finish : SSS, BL/PVD**
**LRS420**

**Finish : SSS**

**LRS421**

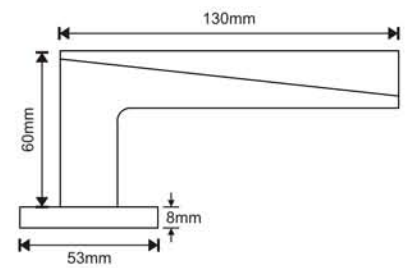

SCG/PVD



Finish : SSS, SCG/PVD

**LRS422**

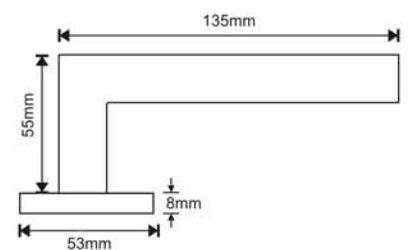

BL/PVD



Finish : SSS, BL/PVD

**LRS423**


BL/PVD



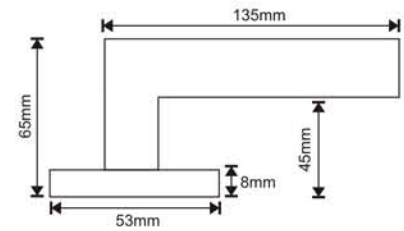
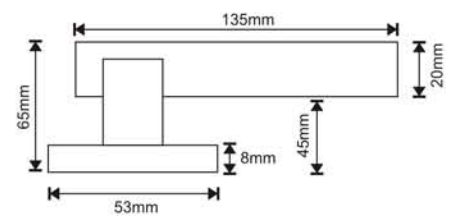
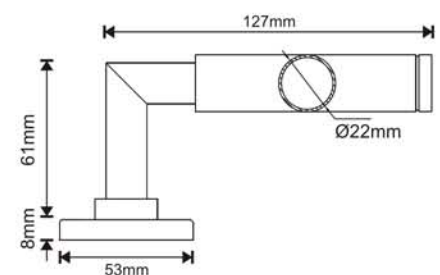
Finish : SSS, BL/PVD

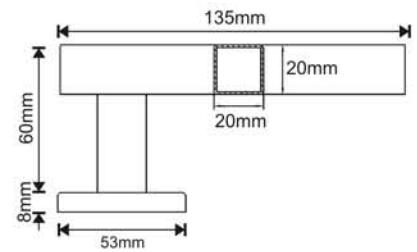


**LRS401**

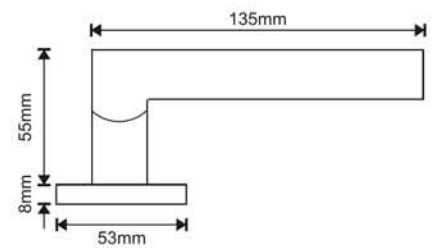

BL/PVD

PSS

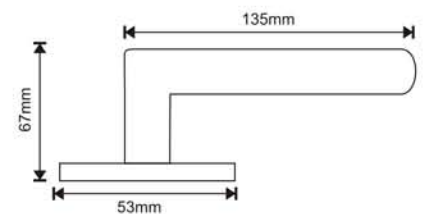
 For Pull Handle  
refer to page 70

**Finish: SSS, PSS, BL/PVD**
**LRS402**

**Dual Finish : SSS/PSS**
**LRS405**

**Dual Finish : SSS/PSS**

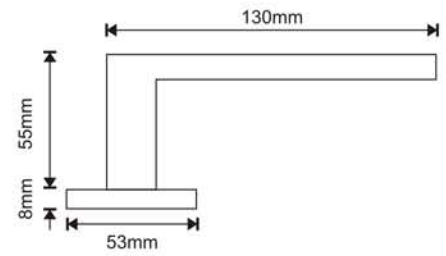
**LRS406**

**Dual Finish : SSS**
**LRS408**


BL/PVD


**Finish : SSS, BL/PVD**
**LRS415**


BL/PVD

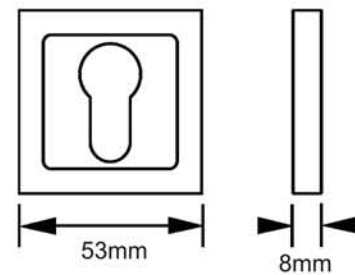

**Finish : SSS, BL/PVD**

**LRS419**


Finish : SSS, BL/PVD

**Escutcheon & Thumbturn - 400 series**
**EES401**

Euro Square Escutcheon



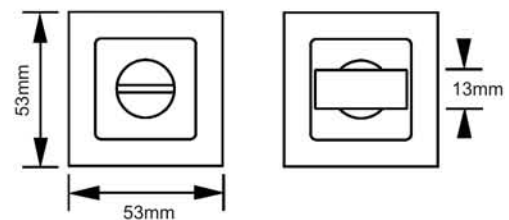
Finish : SSS

**TRS404**

Square Thumbturn and Release  
Without Indicator

**TRS404i**

Square Thumbturn and Release  
With Indicator



Finish : SSS

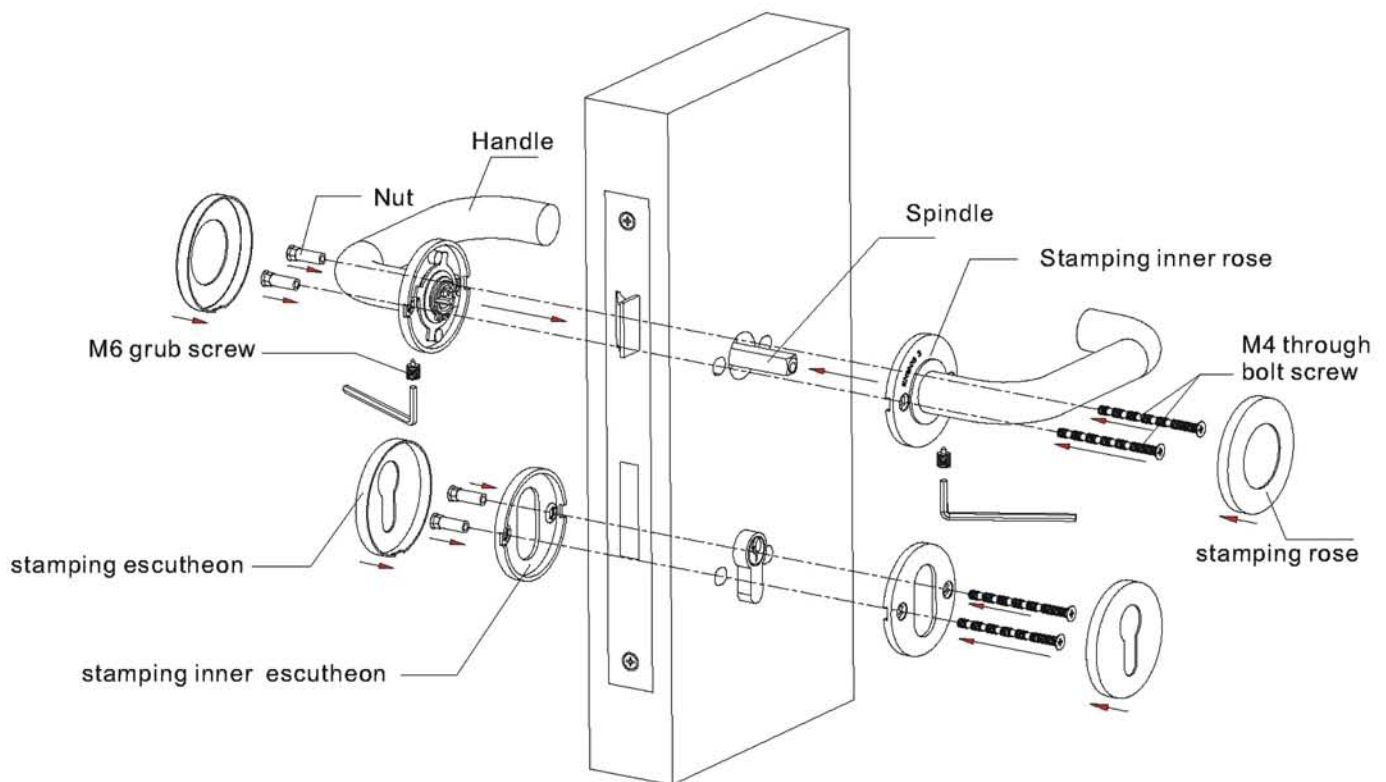


# Introduction - Grade 3 Lever Handles

EuroArt Grade 3 Lever Handles are suitable for high frequency of use by public or others with little incentive to exercise care and with a high chance of misuse, e.g. public office doors, common area doors etc.

## Features

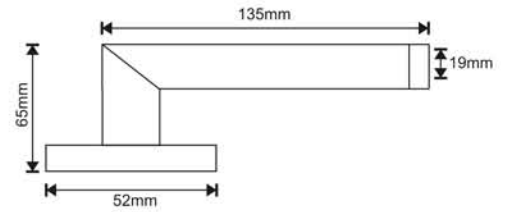
- Grade 304 Stainless Steel.
- Distinctive "Snap on Cover Rose" system provides perfect fit for stamping rose.
- Spring loaded furniture.
- Grub screw and back to back fixing bolts ensure accurate fitting of handles and eliminate shaking of lever handles.
- Suitable for use on fire/smoke door assemblies.



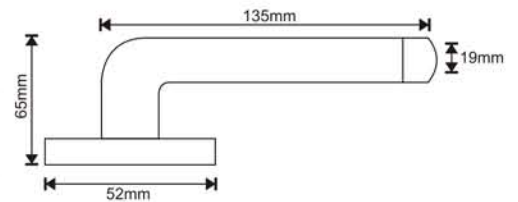
For over 30 years, we have strived for the perfection we are now renowned for in door furniture. Choose from our wide portfolio of lever handle designs.

Flexibility, function and design exude each lever handle.

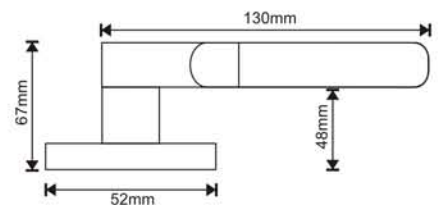
From minimalist designs to elegantly chic styles, there is a shape, style and finish to suit every designer's choice.

**LRS301**


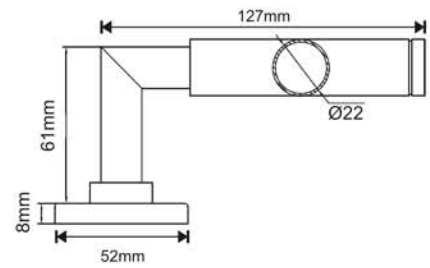
**Dual Finish : SSS/PSS, PB/PVD-PSS**

**LRS302**


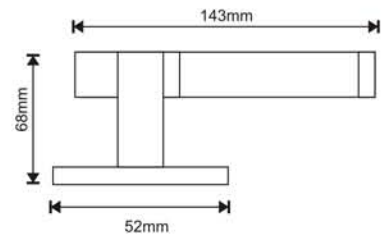
**Dual Finish : SSS/PSS**

**LRS303**


**Dual Finish : SSS/PSS, PB/PVD-PSS**

**LRS304**


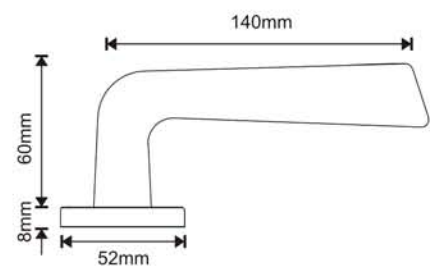
**Dual Finish: SSS/PSS**

**LRS307**


**Dual Finish: SSS/PSS**

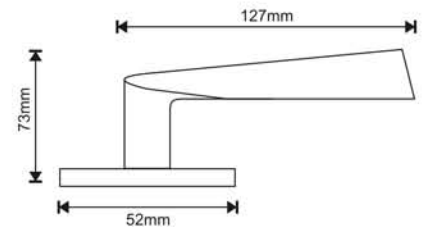
**LRS308**


BL/PVD



**Finish: SSS, BL/PVD**

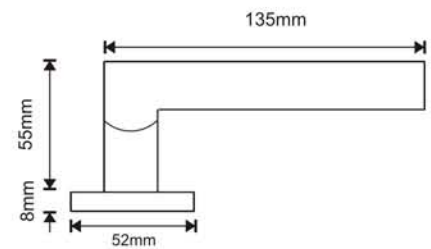
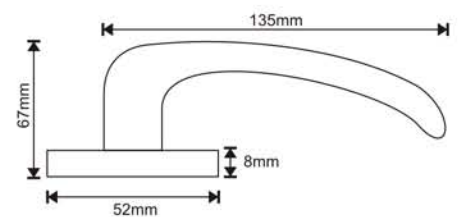


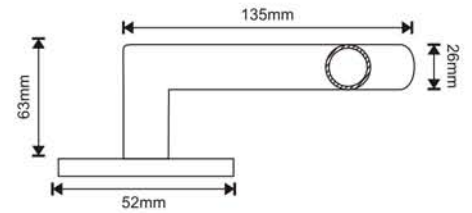
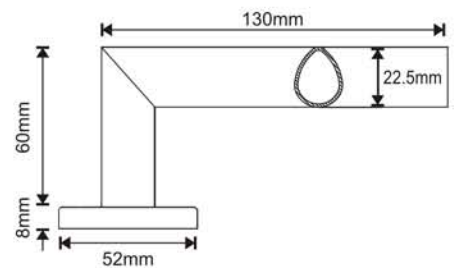
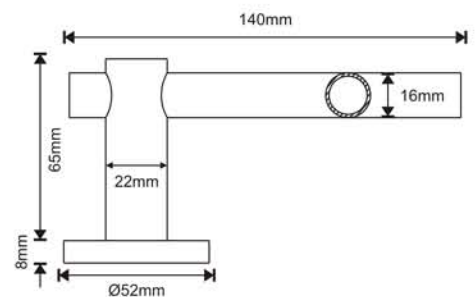
**LRS309**

**Finish: SSS**
**LRS310**

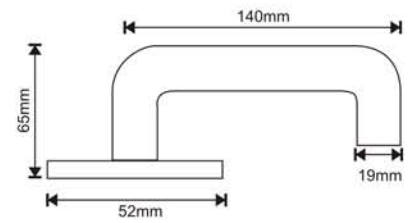
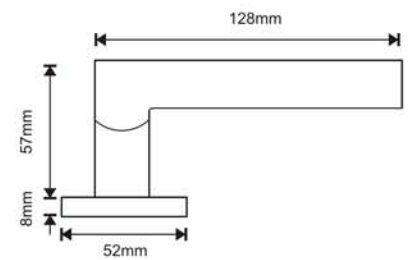
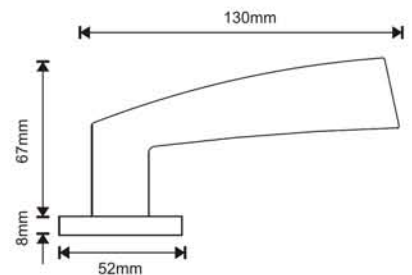

SB/PVD



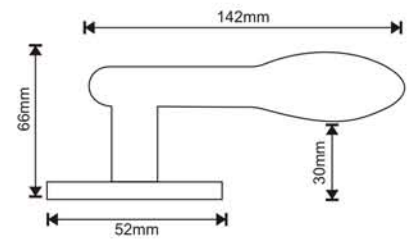
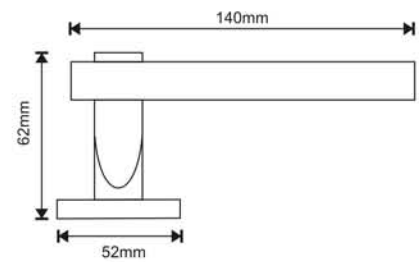
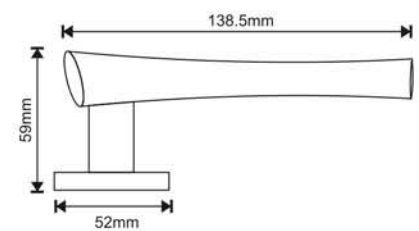
BL/PVD

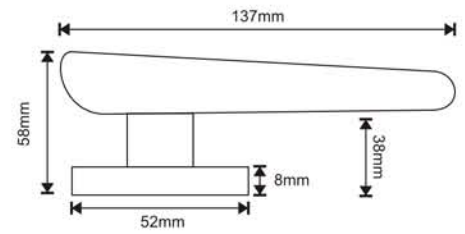

**Finish: SSS**
**LRS311**

**Finish: SSS**

**LRS314**

**Finish: SSS**
**LRS315**

**Finish: SSS**
**LRS316**

**Finish: SSS, BL/PVD**

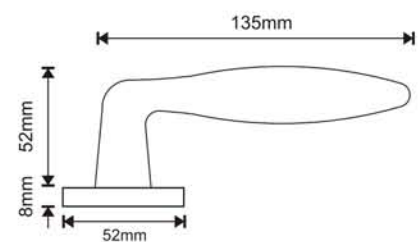
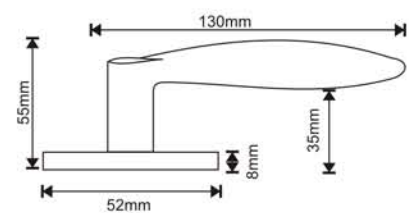
**LRS201 - SOLID**

**Finish: SSS**
**LRS202**

**Finish: SSS, SB/PVD, SCG/PVD, BL/PVD**
**LRS203**

**Finish: SSS, PB/PVD, BL/PVD**



**LRS204**

**Finish: SSS**
**LRS207**

**Finish: SSS**
**LRS208**

**Finish: SSS**

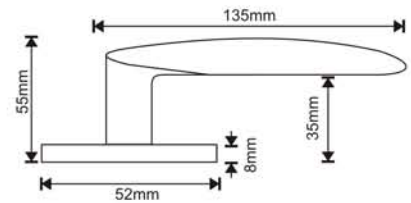
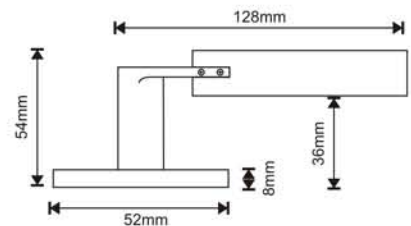
**LRS210**

**Finish: SSS**
**LRS211**


PB/PVD

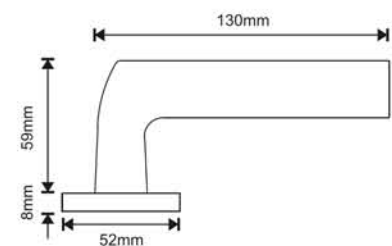

**Finish: SSS, PB/PVD**
**LRS212**

**Finish: SSS**

**LRS213**


PB/PVD


**Finish: SSS, PB/PVD**
**LRS215**

**Dual Finish : SSS/PSS**
**LRS219**

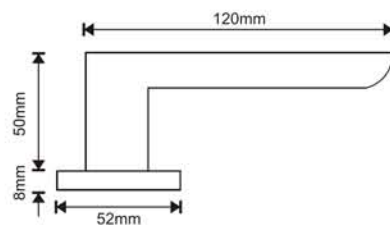
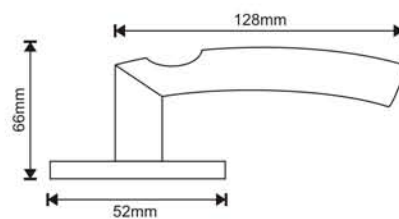

SB/PVD


**Finish: SSS, SB/PVD**



**LRS220**


BL/PVD

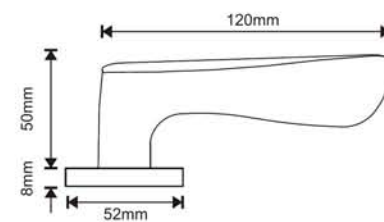

**Finish: SSS, BL/PVD**
**LRS222**

**Finish: SSS**
**LRS224**

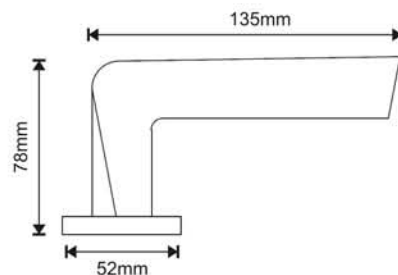
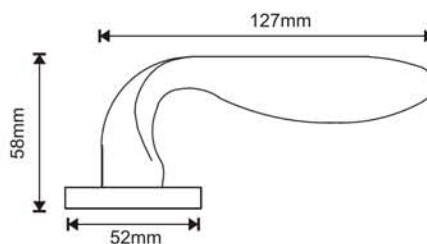
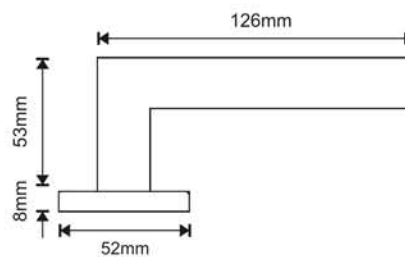

PSS

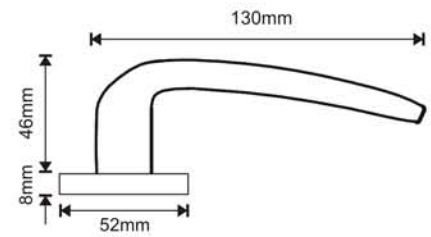
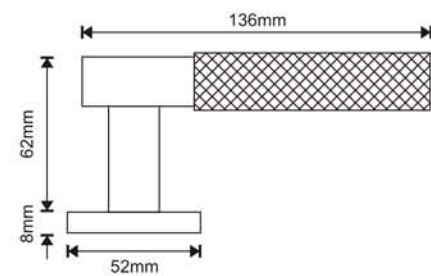
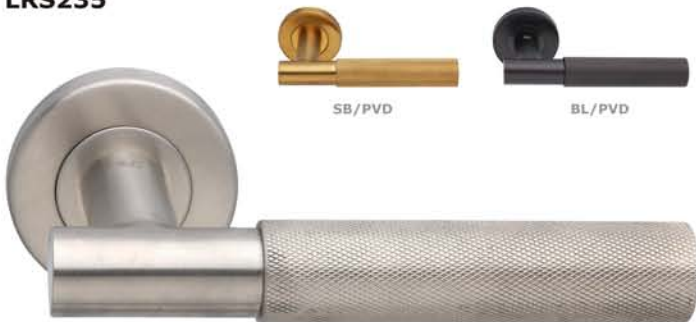
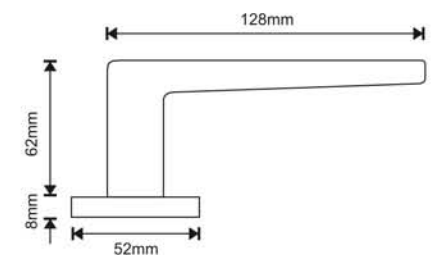
PB/PVD

BL/PVD

SSS

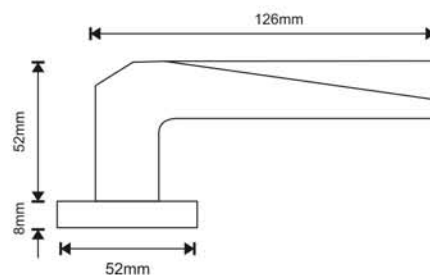

**Finish: SSS, PSS, PB/PVD, BL/PVD, ORB**

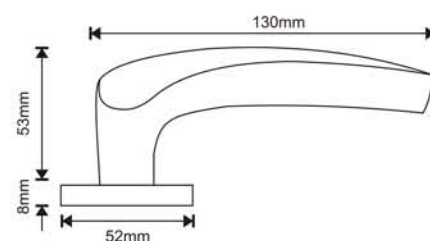
**LRS230**

**Finish: SSS**
**LRS232**

**Finish: SSS**
**LRS233**

**Finish: SSS, BL/PVD, SB/PVD**

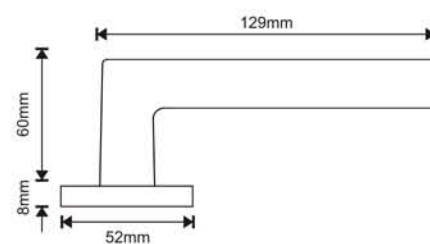
**LRS234**

**Finish: SSS, PSS**
**LRS235**

**Finish: SSS, SB/PVD, BL/PVD**
**LRS236**

**Finish: SSS, BL/PVD**



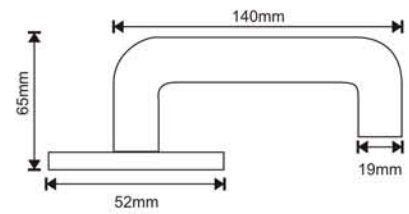
**LRS237**

**Finish: SSS, SB/PVD**

**LRS238**

**Finish: SSS, SB/PVD**

**LRS239**

**Finish: SSS**


**LRS101** - 19mm Safety Lever  
**LRS101/22** - 22mm Safety Lever

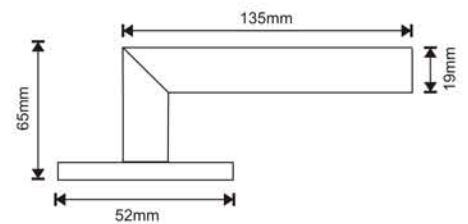


**Finish: SSS**

**LRS102**

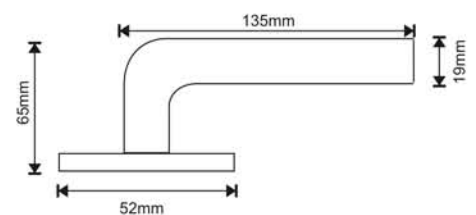


BL/PVD

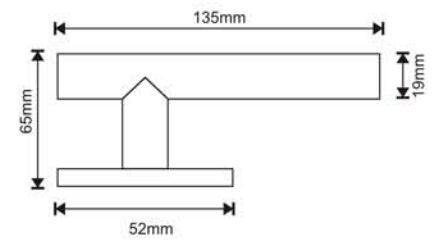
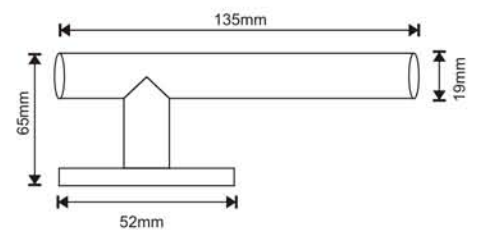
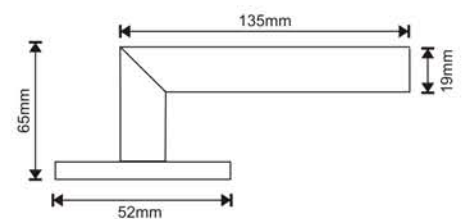


**Finish: SSS, BL/PVD**

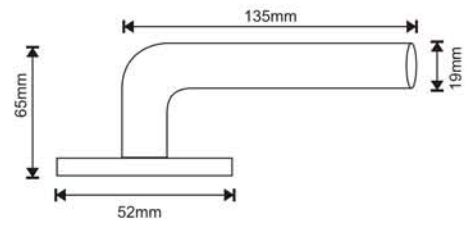
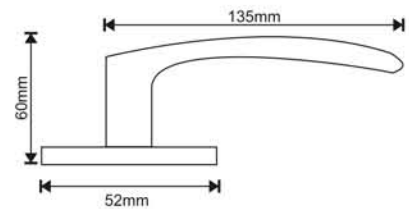
**LRS103**

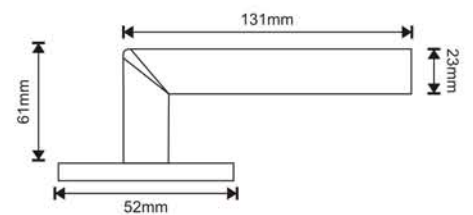


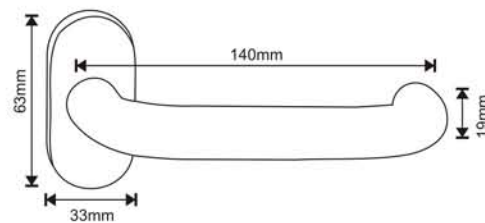
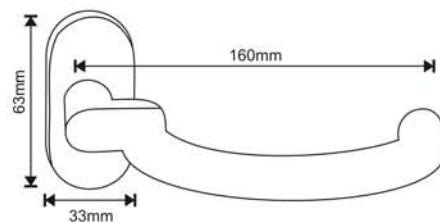
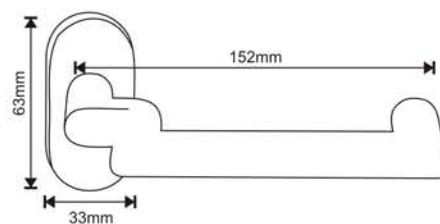
**Finish: SSS**

**LRS104**

**Finish: SSS, BL/PVD**
**LRS105**

**Finish: SSS**
**LRS106**

**Finish: SSS**

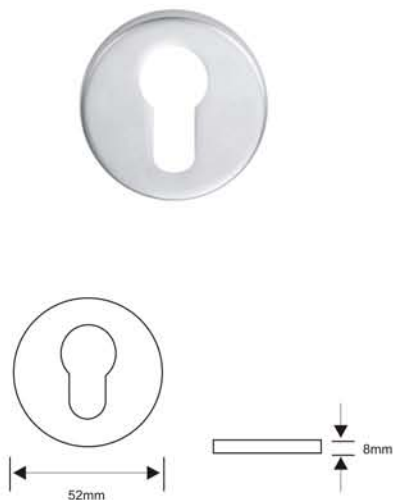


**LRS107**

**Finish: SSS**
**LRS110**

**Finish: SSS**
**LRS114**

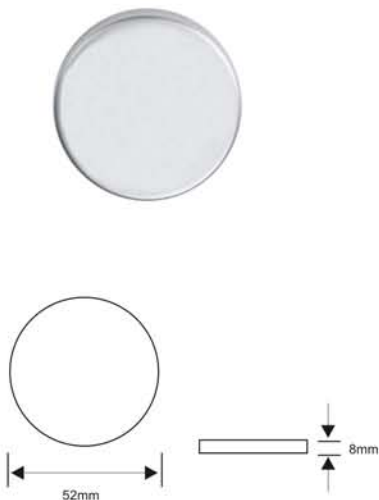
**Oval Section**

**Finish: SSS**

**LRS151**

**Finish: SSS**
**LRS152**

**Finish: SSS**
**LRS153**

**Finish: SSS**

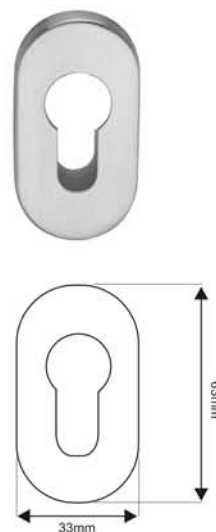
**EES001**  
Euro Profile Escutcheon



**BES002**  
Blank Escutcheon



**NES003**  
Narrow Escutcheon




### Thumbturn and Release

**TRS004**  
Thumbturn and Release  
Without Indicator



**TRS004i**  
Thumbturn and Release  
With Indicator



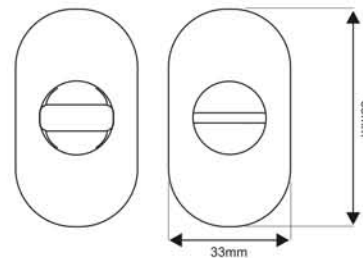
**TRS005i**  
Disabled Thumbturn and  
Release With Indicator



**TRN006**  
Narrow Stile Thumbturn  
and Release Without Indicator



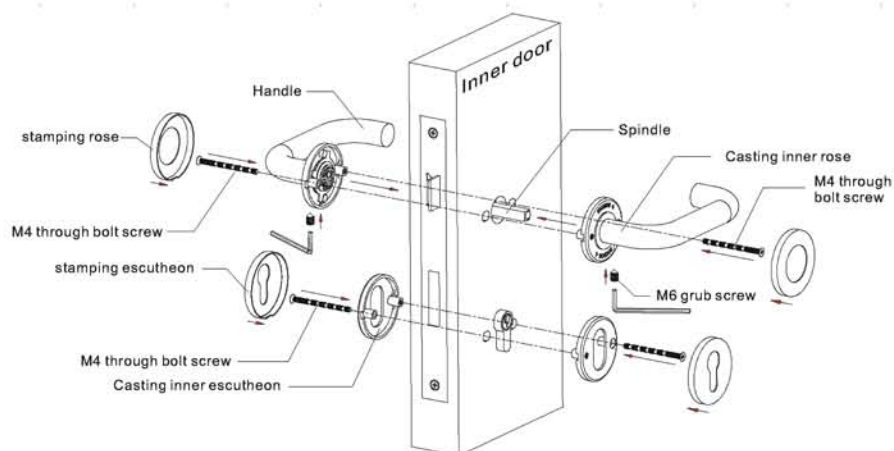
**TRN006i**  
Narrow Stile Thumbturn  
and Release With Indicator



**Finish: SSS, PSS, PB/PVD, SB/PVD, BL/PVD, MAB**






**G4L 101**


**The highest possible grade for lever handles as per BS EN 1906 : Grade 4**

### Features

- Click on rose cover, c/w solid cast inner rose
- For extreme category of use, suitable for harsh and abusive environments such as prisons, secure facilities and industrial applications
- Tested to 200,000 cycles
- 1,000 hours (Grade 5) corrosion test
- Tested to BS EN 1906 grade 4
- Fire tested suitable for timber & metal doors
- Marine grade 316 stainless steel available to order



**LBS701**(72mm centre)



Finish: SSS, PSS


**The highest possible grade for lever handles as per BS EN 1906 : Grade 4**

**FEATURES**

- Size: 170 x 170 x 1.5mm thick.
- Lever: 22mm Dia.
- Door Thickness 32-55mm doors.
- Mechanism : Sprung.
- 160x160mm plate available on order
- Backplate & lever size variations available.
- Marine grade 316 Stainless Steel available to order.
- 2 and 3mm plate available on special order

Refer to chart opposite

**Door Handling**



**LBS701**  
**Lever Euro Profile Lock Furniture**



**LBS702**  
**Lever Latch Furniture**



**LBS703 - L**  
**LBS703 - R**  
**Lever on Bathroom Backplate**  
**78mm centre**

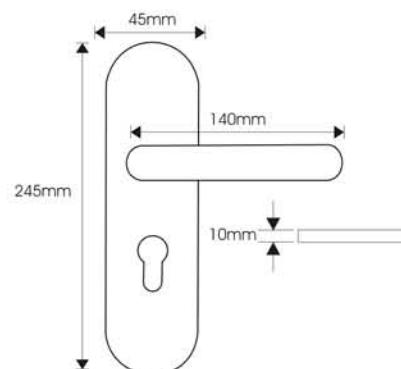


**LBS705**  
**22mm Dia Lever Handle on**  
**160 x 60 Back Plate**  
**72mm centre**

**LBS707**

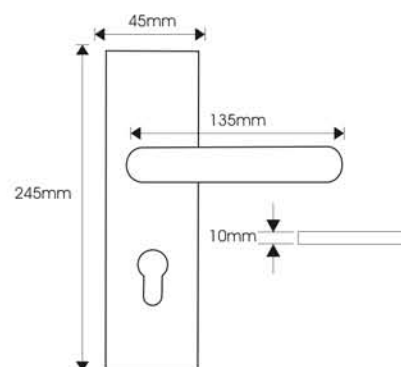
**Finish: SSS, PSS**

- Hollow lever handle on stainless steel plate


**LBS709**

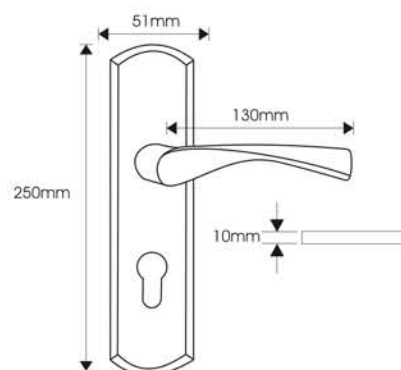
**Finish: SSS, PSS**

- Hollow lever handle on stainless steel plate


**LBS711**

**Finish: SSS, PSS**

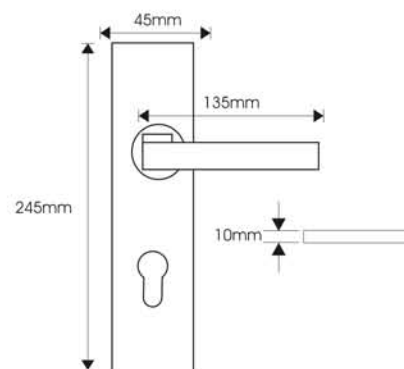
- Solid lever handle on investment casting stainless steel plate



**LBS712**

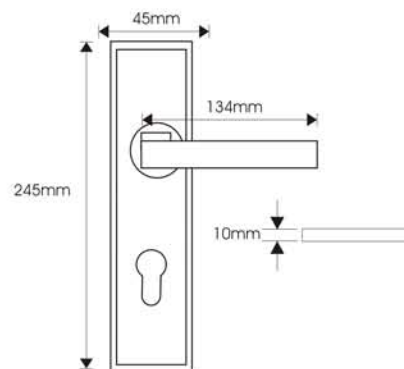
**Finish: SSS, PSS**

- Hollow lever handle on stainless steel plate


**LBS713**

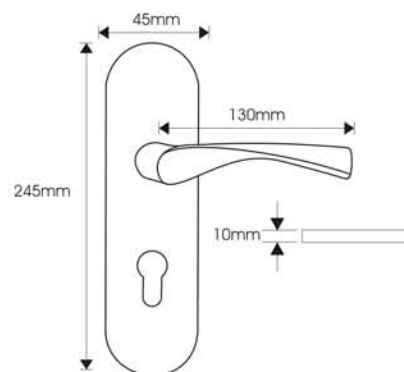
**Finish: SSS, PSS**

- Hollow lever handle on stainless steel plate






**LBS714**

**Finish: SSS, PSS**

- Hollow lever handle on stainless steel plate





**MKS201 : 54mm**
**MKS202 : 66mm**
**MKS205**

**MKS210**
**MKS215 : 60x60x15mm**
**MKS216 : 70x70x21mm**

**Finish: SSS, PSS**




**Finish: SSS**

### Features

- A range of cylindrical locksets suitable for residential application such as apartments and houses.
- Suitable for left and right handed doors.
- Backset : 60mm
- Door thickness : 35 to 50mm
- Function: Passage set, Privacy set, Storeroom and Entrance set.


#### SCPL60 : 60mm



#### Privacy

- Both knobs locked or unlocked by push-button inside.
- Push-button automatically release when inside knob is turned or door is closed
- Outside knob unlocked with a coin insert, inside knob always free.

#### SCEL60 : 60mm



#### Entrance

- Both knobs locked or unlocked by key outside or push-button inside.
- Outside locked or unlocked by key outside or push-button inside.
- Inside knob always free



# Pull Handle

## Stainless Steel Range



At EuroArt,

We believe that every door is a gateway and your opportunity to make the first impression. Having been working on the stainless steel pull handles for many years, EuroArt now presents you a complete range of pull handles. By incorporating the superior material, outstanding finish and a variety of styles, you will easily find the balance of simplicity and flexibility in this line.



## Stainless Steel Range of Pull Handles

Page no. 66 - 73

D Pull Handle



Mitred Pull Handle



'T' Bar Pull Handle



'C' Shaped Pull Handle



1926 Oval T Pull Handle



Cranked Pull Handle



Square Mitred Pull Handle



80x20 'T' Shape Pull Handle



Inclined Support 'T' Bar Pull Handle



25mm Square 'T' Shape Pull Handle



Oval 'T' Pull Handle



Allure Pull Handle



Marvel Pull Handle



Azura Pull Handle



Elegante Pull Handle



Astrid Pull Handle





## Solid Range of Pull Handles

Page no. 74- 75

Movida Pull Handle



Prive pull handle



40x10 T Shape Pull Handle



Offset 40x10 T Shape Pull Handle



## Stainless Steel Range of Plate Handles

Page no. 76

SS plate with Pull Engraved



SS Plate Plain



Covered Rose Fixing Pack



PHR101 : 50 x 8mm  
PHR131 : 80 x 8mm

Square Rose Fixing Pack



PHR701 : 52 x 8mm

Back to Back Fixing Pack



BBF16 : For 16mm dia  
BBF19 : For 19mm dia  
BBF22 : For 22mm dia  
BBF25 : For 25mm dia  
BBF32 : For 32mm dia

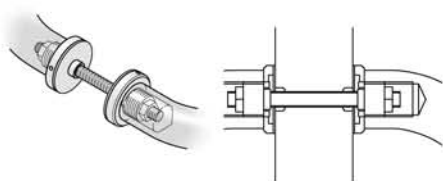
Pull Handles Ring



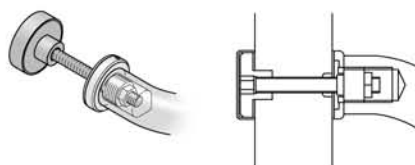
HR16 : For 16mm dia  
HR19 : For 19mm dia  
HR22 : For 22mm dia  
HR25 : For 25mm dia  
HR32 : For 32mm dia

## Fixing Type

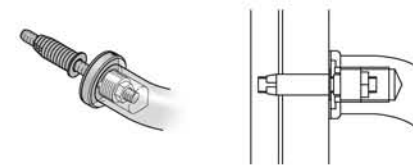
Back to back



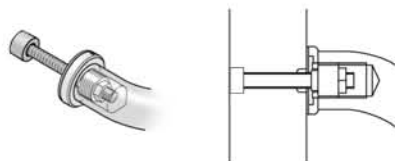
Bolt through fixing with end cap

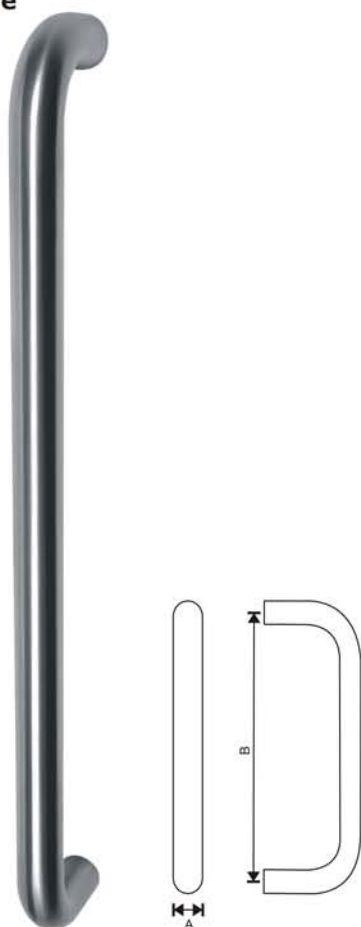


Face fixing with threaded inserted



Bolt through fixing



**D Pull Handle**


Ref. No.	Size(A x B)
● PHS001	16 x 225mm
● PHS002	16 x 300mm
● PHS101	19 x 150mm
● PHS102	19 x 225mm
● PHS103	19 x 300mm
● PHS104	19 x 400mm
● PHS110	22 x 225mm
● PHS111	22 x 300mm
● PHS112	22 x 400mm
● PHS121	25 x 300mm
● PHS122	25 x 450mm
● PHS123	25 x 600mm
● PHS130	32 x 300mm
● PHS131	32 x 450mm
● PHS132	32 x 600mm
● PHS133	32 x 900mm
● PHS134	32x1200mm

**Mitred Pull Handle**


Ref. No.	Size(A x B)
● PHS201	19 x 150mm
● PHS202	19 x 225mm
● PHS203	19 x 300mm
● PHS221	25 x 300mm
● PHS222	25 x 600mm
● PHS231	32 x 600mm
● PHS232	32 x 750mm
● PHS233	32 x 900mm

**Finish: SSS, PSS, BL/PVD, SB/PVD**

**'T' Bar Pull Handle**


Ref. No.	Size(A x B x C)
● PHS301	: 19 x 225 x 325mm
● PHS321	: 25 x 225 x 344mm
● PHS322	: 25 x 300 x 419mm
● PHS323	: 25 x 450 x 600mm
● PHS324	: 25 x 2000 x 2200mm
● PHS330	: 32 x 300 x 450mm
● PHS331	: 32 x 450 x 600mm
● PHS332	: 32 x 600 x 775mm
● PHS333	: 32x1000x1200mm
● PHS335	: 32x1300x1500mm
● PHS337	: 32x1600x1800mm

**'C' Shaped Pull Handle**

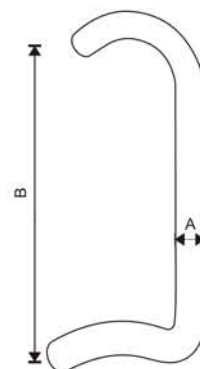

Ref. No.	Size(A x B)
● PHS421	: 25 x 250mm
● PHS431	: 32 x 350mm

**Finish: SSS, PSS, BL/PVD, SB/PVD**

**1926 Oval T Pull Handle**


Ref. No.	Size(A x B)
● PHS571	: 400 x 600mm
● PHS572	: 800 x 1000mm
● PHS573	: 1000 x 1200mm

- PHS571 : 400 x 600mm
- PHS572 : 800 x 1000mm
- PHS573 : 1000 x 1200mm

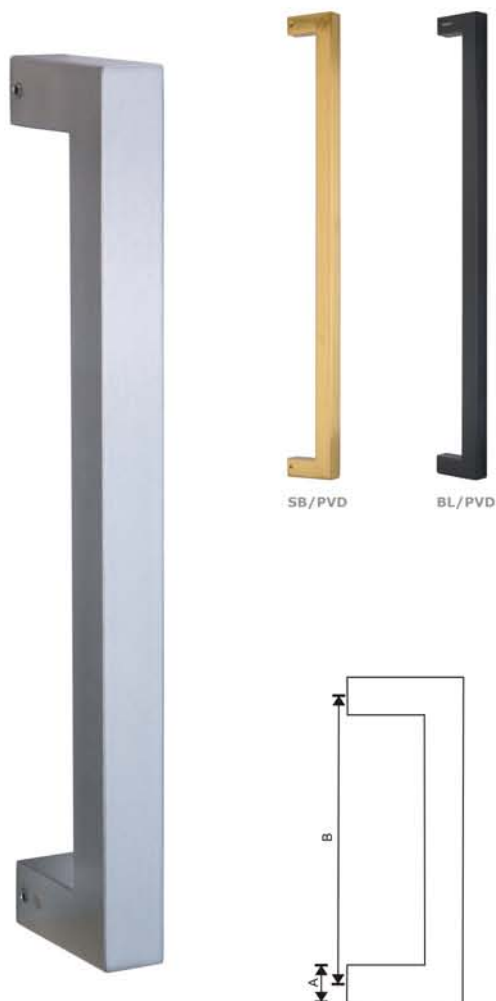
**Cranked Pull Handle**


Ref. No.	Size(A x B)
● PHS621	: 25 x 300mm
● PHS622	: 25 x 450mm
● PHS630	: 32 x 300mm
● PHS631	: 32 x 450mm
● PHS632	: 32 x 600mm
● PHS633	: 32 x 900mm
● PHS634	: 32 x 1200mm

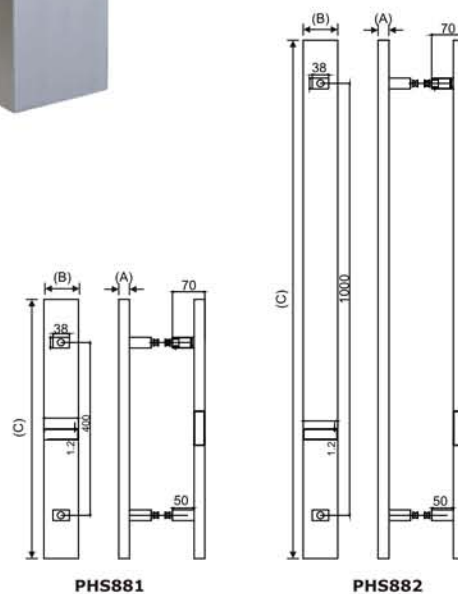
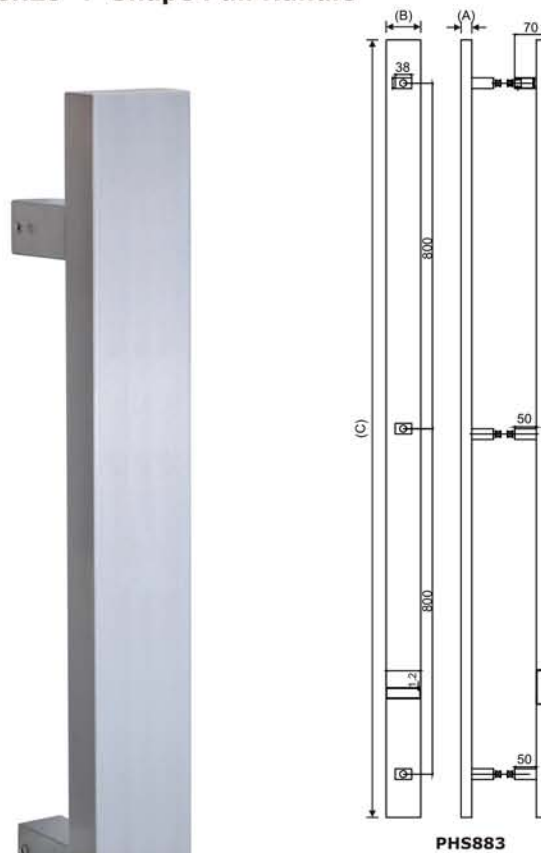
- PHS621 : 25 x 300mm
- PHS622 : 25 x 450mm
- PHS630 : 32 x 300mm
- PHS631 : 32 x 450mm
- PHS632 : 32 x 600mm
- PHS633 : 32 x 900mm
- PHS634 : 32 x 1200mm

**Finish: SSS, PSS**



**Square Mitred Pull Handle**


Ref. No.	Size(A x B)
● PHS701	19 x 150mm
● PHS702	19 x 225mm
● PHS703	19 x 300mm
● PHS704	19 x 450mm
● PHS705	19 x 600mm
● PHS721	25 x 300mm
● PHS722	25 x 450mm
● PHS723	25 x 600mm
● PHS724	25 x 750mm
● PHS725	25 x 900mm
● PHS726	25 x 1200mm

**80x20 'T' Shape Pull Handle**


Ref. No.	Size (A x B x C)
● PHS881	20 x 80 x 600mm
● PHS882	20 x 80 x 1200mm
● PHS883	20 x 80 x 1800mm

**Finish: SSS, PSS, SB/PVD, BL/PVD**

**Inclined Support 'T' Bar Pull Handle**


Ref. No.    Size(A x B x C)

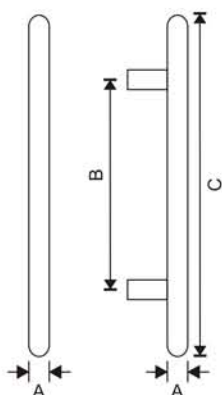
- PHS1031 : 32 x 450 x 600mm
- PHS1032 : 32 x 600 x 775mm
- PHS1033 : 32x1000x1200mm
- PHS1034 : 32x1200x1400mm
- PHS1035 : 32x1300x1500mm
- PHS1036 : 32x1400x1600mm
- PHS1037 : 32x1600x1800mm

**25mm Square 'T' Shape Pull Handle**


Ref. No.    Size(A x B x C)

- PHS1121 : 25 x 300 x 450mm
- PHS1122 : 25 x 450 x 600mm
- PHS1123 : 25 x 600 x 775mm
- PHS1124 : 25 x 800 x 1000mm
- PHS1125 : 25x1000x1200mm
- PHS1127 : 25x1400x1600mm
- PHS1128 : 25x1600x1800mm
- PHS1129 : 25x2000x2200mm

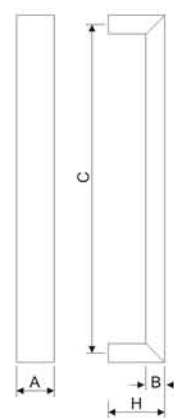
**Finish: SSS, PSS, SB/PVD, BL/PVD**

**Oval 'T' Pull Handle**


Ref. No.	Size(A x B x C)
● PHS1211	: 20 x 300 x 400mm
● PHS1212	: 20 x 400 x 500mm
● PHS1213	: 20 x 500 x 600mm
● PHS1214	: 20 x 700 x 800mm
● PHS1215	: 20x 900x 1000mm
● PHS1216	: 20x1100x1200mm
● PHS1217	: 20x1300x1400mm

**Allure Pull Handle**


SSS

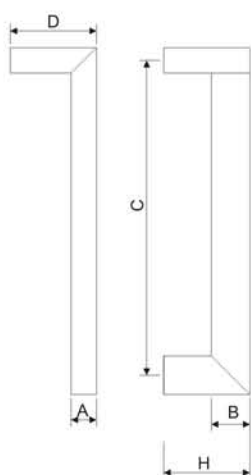


Ref. No.	Size(A x B x C x H)
● PHS1321	: 25 x 13 x 300 x 50mm
● PHS1322	: 25 x 13 x 450 x 50mm
● PHS1323	: 25 x 13 x 600 x 50mm
● PHS1330	: 30 x 15 x 450 x 60mm
● PHS1331	: 30 x 15 x 600 x 60mm
● PHS1332	: 30 x 15 x 800 x 60mm
● PHS1341	: 40 x 20 x 600 x 70mm
● PHS1342	: 40 x 20 x 800 x 70mm
● PHS1351	: 40 x 30 x 600 x 80mm
● PHS1352	: 40 x 30 x 800 x 80mm

**Finish: SSS, PSS, BL/PVD, SB/PVD**

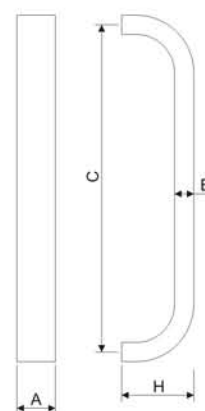
**Marvel Pull Handle**


BL/PVD



Ref. No.	Size(A x B x C x D x H)
----------	-------------------------

- |           |                              |
|-----------|------------------------------|
| ● PHS1421 | : 25 x 38 x 1000 x 85 x 85mm |
|-----------|------------------------------|

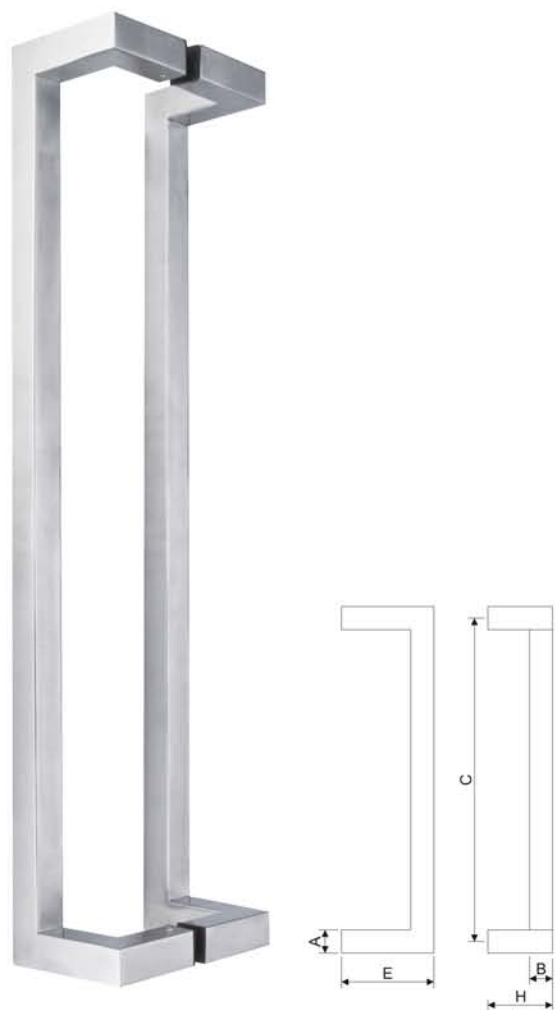
**Azura Pull Handle**


Ref. No.	Size(A x B x C x H)
----------	---------------------

- |           |                        |
|-----------|------------------------|
| ● PHS1551 | : 40 x 20 x 300 x 70mm |
| ● PHS1552 | : 40 x 20 x 450 x 70mm |
| ● PHS1553 | : 40 x 20 x 600 x 75mm |
| ● PHS1554 | : 40 x 20 x 800 x 75mm |

**Finish: SSS, PSS, BL/PVD**



**Elegante Pull Handle**


Ref. No.	Size(A x B x C x E x H)
● PHS1621	: 25 x 25 x 300 x 80 x 70mm
● PHS1622	: 25 x 25 x 450 x 80 x 70mm
● PHS1623	: 25 x 25 x 600 x 80 x 70mm
● PHS1641	: 40 x 20 x 300 x 80 x 75mm
● PHS1642	: 40 x 20 x 450 x 80 x 75mm
● PHS1643	: 40 x 20 x 600 x 80 x 75mm

**Astrid Pull Handle**


Ref. No.	Size (A x B x C)
● PHS1921	: 90 x 350 x 380mm

**Finish: SSS, PSS, SB/PVD**

**Movida Pull Handle**


Ref. No.	Size
● PHS1805	: 500mm

**Prive Pull Handle**


Ref. No.	Size
● PHS2002	: 29 x 350 x 480mm

**Finish: SSS, PSS, BL/PVD, SB/PVD**






**40x10 T Shape Pull Handle**

**BL/PVD**

**SB/PVD**

Ref. No.	Size
----------	------

- PHS2341 : 600mm
- PHS2342 : 1200mm
- PHS2343 : 1800mm








**PHS2341**

**PHS2342**

**PHS2343**
**Offset 40x10 T Shape Pull Handle**

**BL/PVD**

**SB/PVD**

Ref. No.	Size
----------	------

- PHS2441 : 600mm
- PHS2442 : 1200mm
- PHS2443 : 1800mm


**PHS2441**

**PHS2442**

**PHS2443**
**Finish: SSS, PSS, BL/PVD, SB/PVD**

**SS Plate with PULL Engraved**


Ref. No.	Size
● PFPS211	: 350 x 100mm

PFPS211 - Suitable for 225mm length of pull handles.

Note: Pull handle to be ordered separately.

**SS Plate - Plain**


Ref. No.	Size
● PFPS212	: 425 x 100mm

PFPS212 - Suitable for 300mm length of pull handles.

Note: Pull handle to be ordered separately.

**Covered Rose Fixing Pack**


Ref. No.	Size
● PHR101	: 50 x 8mm
● PHR131	: 80 x 8mm

PHR101 - Suitable for 16, 19, 22 & 25mm dia pull handles.

PHR131 - Suitable for 32mm dia pull handles.

**Square Rose Fixing Pack**


Ref. No.	Size
● PHR701	: 52 x 8mm

PHR701 - Suitable for 19mm square pull handles.

**Finish: SSS, PSS**





Signature  
Series



## How it is made - The Art of Brass



### **FINEST RAW MATERIAL**

EuroArt uses only the finest art-grade brass for consistent, high quality castings. Brass is a highly dependable and durable metal that naturally resists corrosion. Scrap brass from sand casting and forging is recycled into subsequent castings.

### **PATTERN MAKING**

Patterns originate as an idea on paper. Then design begins to take shape traditionally in resin models or hand-carved wood, or by implementing sophisticated 3D software.



## How it is made - The Art of Brass



### CASTING OR FORGING

Skilled artisans transform raw brass to beautiful ironmongery through a time - tested and age old technique known as heat forging - putting hot molten brass into a specially made die. The furnace heats upto a pouring temperature of 1200 degree celsius.



### PRECISION MACHINING

Precision machining makes sure that every piece of EuroArt ironmongery functions perfectly and meets our exact specification.

Before the hardware can be finished, it gets a trim. Skilled technicians work the stamping press that trims the extra metal left by forging. Then another machine grinds the surface to remove oxidation, revealing the smooth metal.



### ASSEMBLY & FINISHING

Polishing wheels smooth away the grinding marks. EuroArt ironmongery assembly includes high quality components and coated springs for smooth functions, and to ensure longevity in tough conditions

All finishes are either electroplated, un-lacquered / lacquered living finishes. Then jeweller's rouge is used to carefully buff the product.





## Entrance Pull Handleset - Mortice & Tubular Series

Page no. 85 - 92

EHM201



HC814



HC813



HC802



F8101



F8102



F8103



F81B17



## Lever Handle on Rose - Classic Range **MANDELLI**

Page no. 93

1511-AURORA



## Lever Handle on Rose - Contemporary Range **MANDELLI**

Page no. 94 - 97

1681-LARIO



1751-GRINT



1761-Seven



1831-40+1





## Lever Handle on Rose - Design Range **MANDELLI**

Page no. 98 - 100

PP33



1291 FAN



1611 CALLAS



## Lever Handle on Rose - Alya Series

Page no. 101 - 106

BLR1005



BLR1012



BLR1015



BLR2080



## Lever Handle on Rose - Elan Series

Page no. 107 - 114

BLR3510



BLR3520



BLR3530



BLR3540



BLR3550



BLR3560



BLR3570



BLR3580



## Lever Handle on Rose - Casa Series

Page no. 115 - 121

BLR2000



BLR2010



BLR2030



BLR2035



BLR2040



BLR2045



BLR2050



BLR2060



## Lever Handle on Rose - Vogue Series

Page no. 122 - 128

LRZ9020



LRZ3200



LRZ3300



LRZ9101



LRZ9201



LRZ9301



LRZ9401



## Escutcheons - Vogue Series

Page no. 129

ZES9000



ZRS9003



ZES9001



ZRS9002



## Lever Handle on Rose - Estate Series

Page no. 130 - 137

LRZ5000



LRZ5005



LRZ5010



LRZ5015



LRZ5020



LRZ5025



LRZ5035



LRZ5040



## Lever Handle on Rose - Olivia Series

Page no. 138 - 142

LRZ6000



LRZ6015



LRZ6025



LRZ6030



LRZ6045



## Escutcheons - Estate & Olivia Series

Page no. 143

ZOE6



ZEE5



## Lever Handle on Rose - Savannah Series

Page no. 144 - 152

LRZ3000



LRZ3010



LRZ3030



LRZ3040



LRZ8001



LRZ8021



LRZ8031



LRZ8041



LRZ8051



## Lever Handle on Plate & Rose - Morella Series

Page no. 153 - 156

A3541



A6436



EBAR1000



EBAR1010



EBAR1020



EBAR1030



EBAR1035



EBAR1037



## Escutcheons - Morella Series

Page no. 156

EEZ801 - Round



EEZ901 - Square



## Brass Pull Handles

Page no. 157 - 162

Lina Pull Handle



Mestre - Pull Handle



Innova Pull Handle



Ardea Pull Handle



Cassia Pull Handle



Woody pull handle



Ripple pull handle



Side grooves pull handle



Hammered pull handle



## Brass Door Knobs

Page no. 163 - 164

Oct



Chancery



Reeded



Ball



Regent



Callis

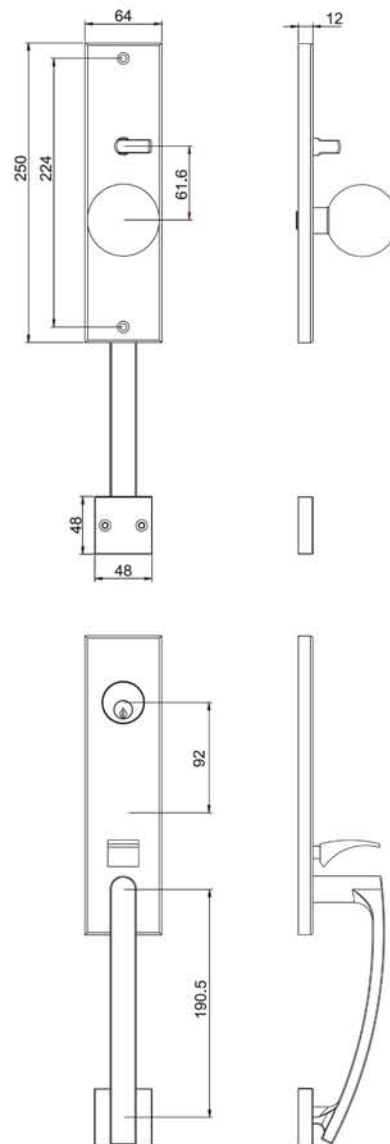






**EHM201**

Contemporary modern design - clean pure design with a strong visual impact for your front door



### Features

- Material : Stainless Steel
- Supplied as complete set with lock and keys
- Lock Backset : 70mm
- Lock Body : ANSI SS Mortice Lock
- Supplied with 7 brass keys
- Available in dummy and passage function
- Deadbolt: 25mm Throw
- Latchbolt: 19mm Throw

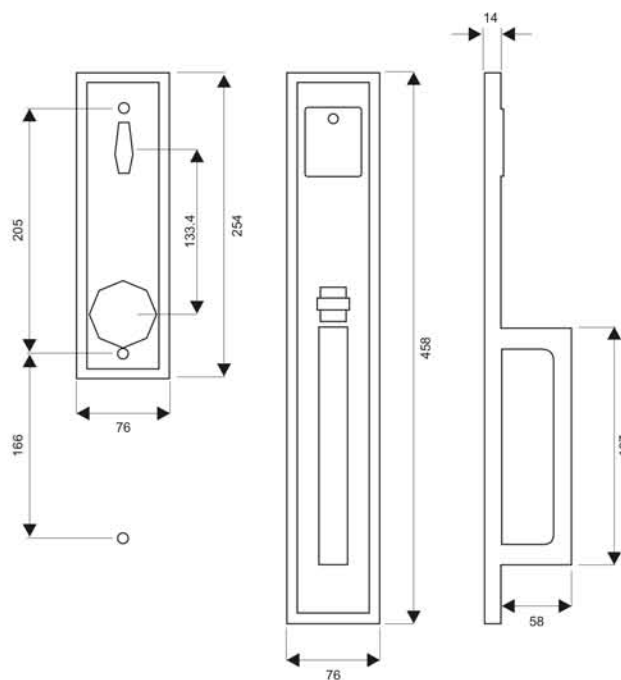
**Finish: SSS, BL/PVD**





HC814

Authentic material shaped through new techniques to make beautiful, organic designs



### Features

- Material : Forged Brass
- Supplied as complete set with lock and keys
- Lock Backset : 60mm or 70mm
- Lock Body : ANSI tubular lock
- Supplied with 7 brass keys
- Available in dummy and passage function

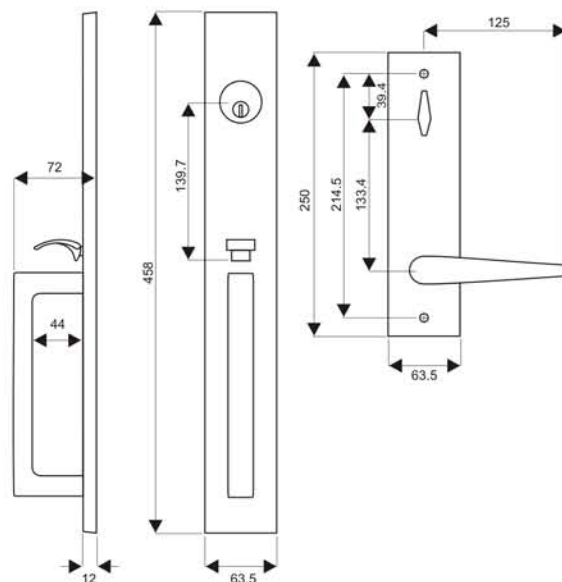
Finish: SN, MAB, MBL





HC813

Clean, pure designs with a strong visual impact for your front door



### Features

- Material : Forged Brass
- Supplied as complete set with lock and keys
- Lock Backset : 60mm or 70mm
- Lock Body : ANSI tubular lock
- Supplied with 7 brass keys
- Available in dummy and passage function

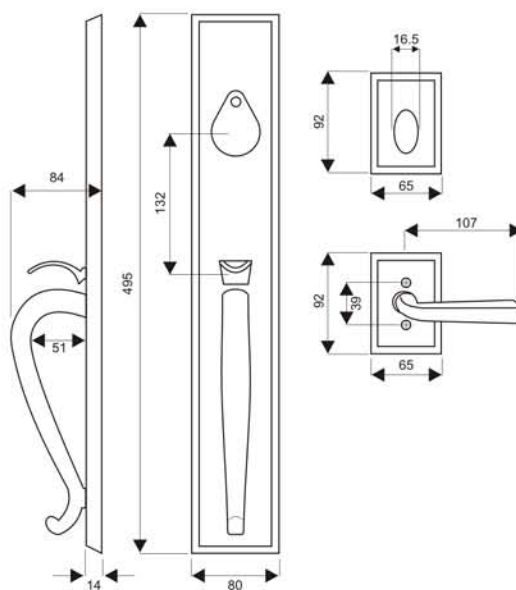
Finish: SN, MAB, MBL





HC802

Timeless materials in elegant design  
for a truly classic aesthetic



### Features

- Material : Forged Brass
- Supplied as complete set with lock and keys
- Lock Backset : 60mm or 70mm
- Lock Body : ANSI tubular lock
- Supplied with 7 brass keys
- Available in dummy and passage function

Finish: SN, MAB, MBL

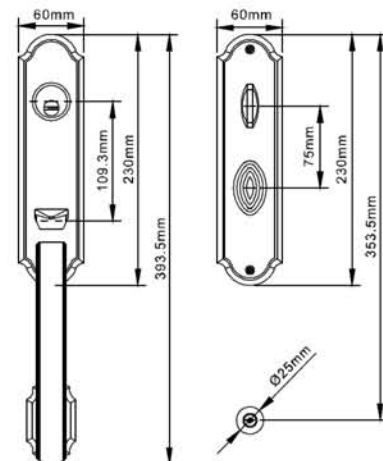






F8101

Styles that hearken back to the early 20th century with the look and feel of artisan craftsmanship



### Features

- Material : Solid zinc alloy die casting
- Supplied as complete set with lock and keys
- Lock Backset : 60mm
- Lock Body : ANSI SS Mortice Lock
- Supplied with 6 brass keys  
(1 construction + 5 owner's keys)
- Standard door thickness: 40 - 60mm
- Available in dummy and passage function

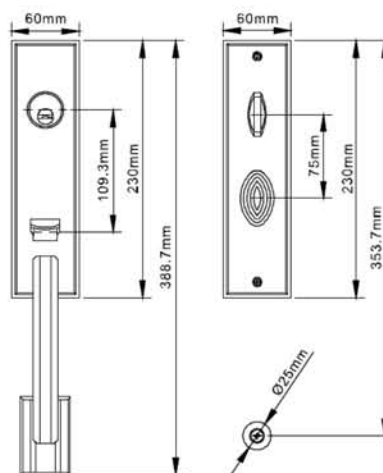
Finish: Gold, SB, MAB, MSN, MBL





F8102

Exquisite designs that make a statement of luxury for your home



### Features

- Material : Solid zinc alloy die casting
- Supplied as complete set with lock and keys
- Lock Backset : 60mm
- Lock Body : ANSI SS Mortice Lock
- Supplied with 6 brass keys  
(1 construction + 5 owner's keys)
- Standard door thickness: 38 - 60mm
- Available in dummy and passage function

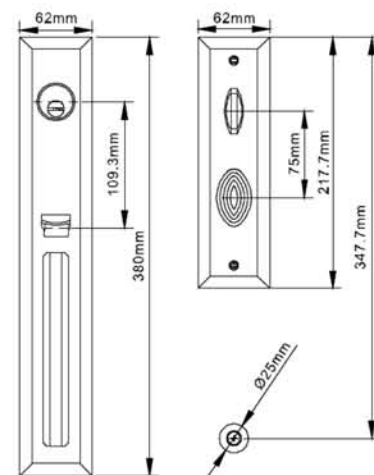
Finish: SB, MAB, MSN, MBL





F8103

Strong lines with soft edges that capture a true contemporary look



### Features

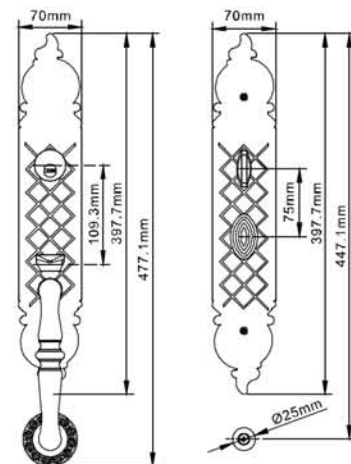
- Material : Solid zinc alloy die casting
- Supplied as complete set with lock and keys
- Lock Backset : 60mm
- Lock Body : ANSI SS Mortice Lock
- Supplied with 6 brass keys  
(1 construction + 5 owner's keys)
- Standard door thickness: 35 - 50mm
- Available in dummy and passage function

Finish: SB, MAB, MSN, MBL



**F81B17**

Pull handlesets with beautiful detailing,  
perfect for home with heritage



### Features

- Material : Solid forged brass
- Supplied as complete set with lock and keys
- Lock Backset : 60mm
- Lock Body : ANSI SS Mortice Lock
- Supplied with 6 brass keys  
(1 construction + 5 owner's keys)
- Standard door thickness: 38 - 55mm
- Available in dummy and passage function

Finish: PB/PVD, SB/PVD, MAB





**1511 AURORA**

**MANDELLI** 1953



**Finish:**



**Antique Chrome**



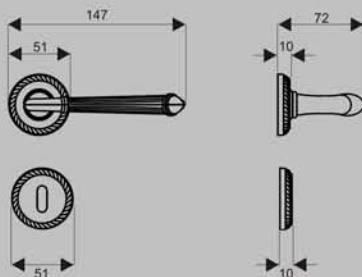
**Polished Brass**



**24KT Gold Plated**

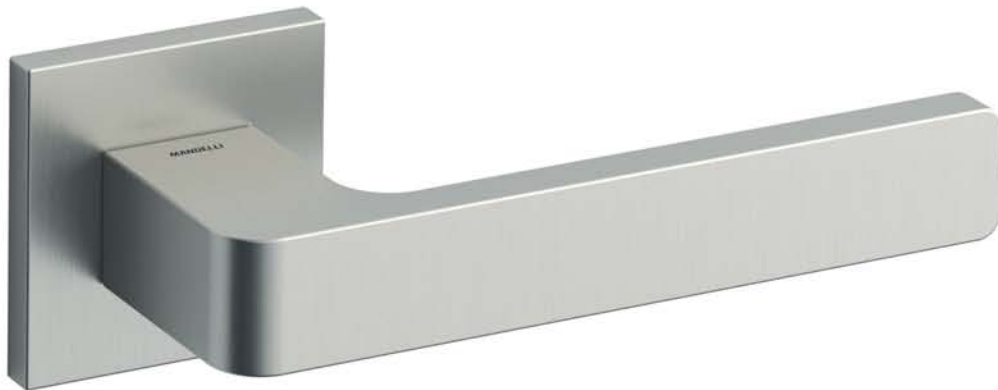


**Matt Bronze**



**1681 LARIO**

**MANDELLI** 1953



Satin Nickel

**Finish:**



Polished Chrome



Polished Brass



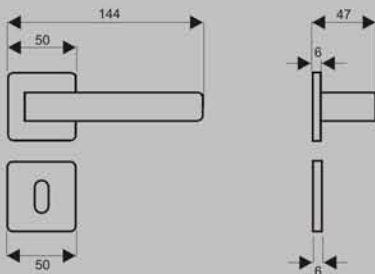
Satin Brass



Matt Black

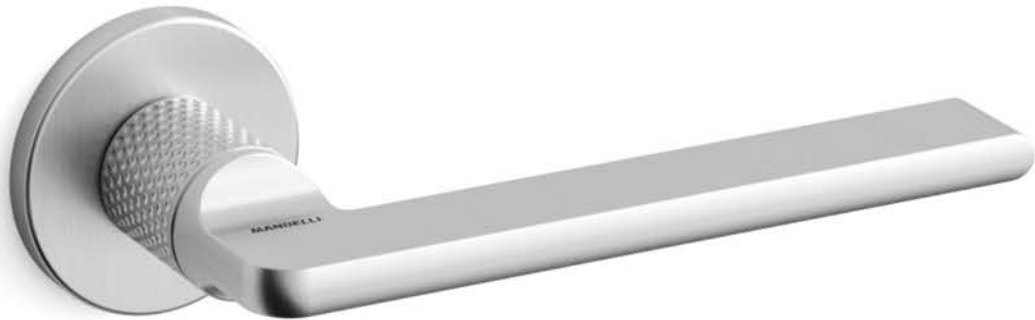


Satin Chrome



**1751 GRINT**

**MANDELLI** 1953



**Finish:**



**Polished Chrome**



**Satin Chrome**



**Graphite**



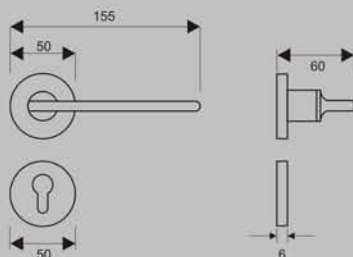
**Satin Brass**



**Matt Satin Nickel**

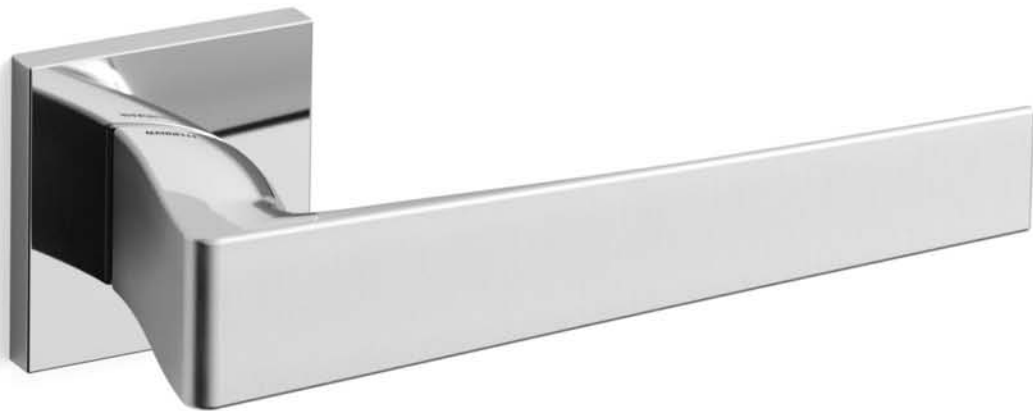


**Matt Bronze**



**1761 SEVEN**

**MANDELLI** 1953



**Finish:**



Polished/Satin Chrome



Black Pearl



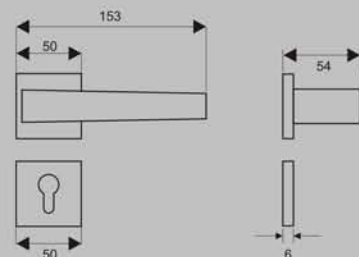
Matt Bronze



Polished/Satin Brass



Graphite





**1831 40+1**
**MANDELLI 1953**



**Finish:**

**Polished Chrome**

**Polished Nickel**

**Black Pearl**

**Matt Satin Nickel**

**Graphite**


PP33

**MANDELLI** 1953



**Finish:**



Imperial Bronze



Polished Chrome



Matt Black



Polished Nickel



Polished Gold

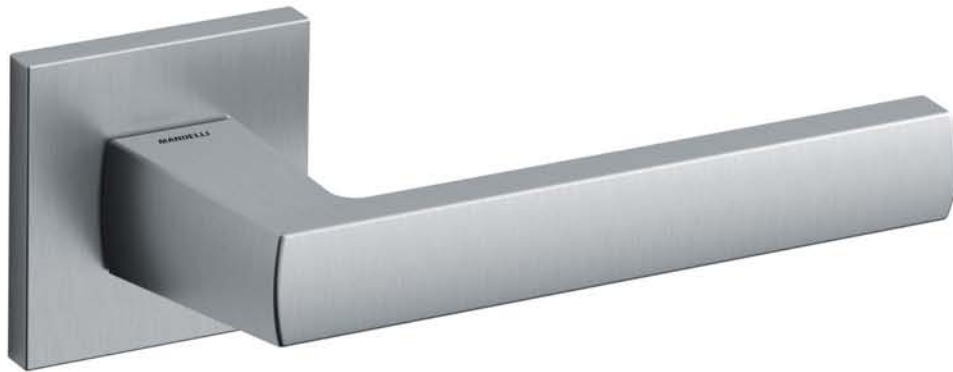


Polished Rose Gold



**1291 FAN**

**MANDELLI** 1953



Satin Chrome

**Finish:**



Imperial Bronze



Satin Brass



Polished Chrome

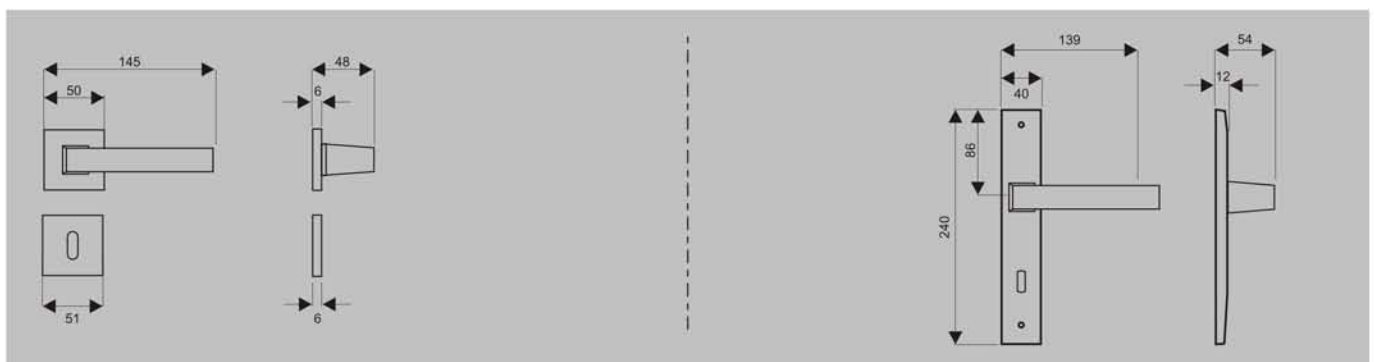


Satin Nickel

**1290**



Satin Chrome



**1611 CALLAS**

**MANDELLI 1953**



**Imperial Bronze**

**Finish:**



**Polished Chrome**



**Satin Chrome**



**Graphite**



**Polished Black**



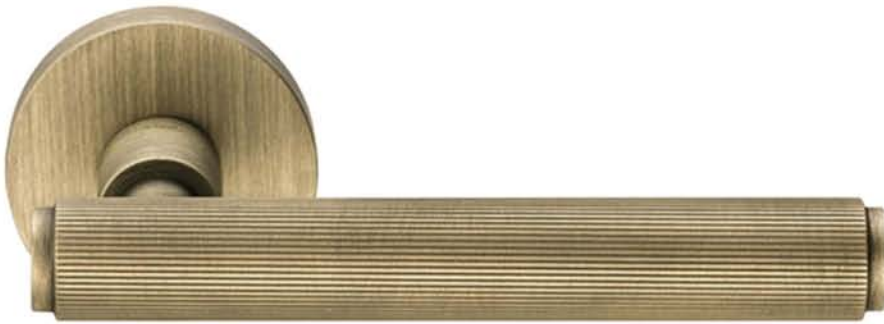
**Polished Brass**



**Satin Brass**





**BLR1005**

**Matt Antique Brass**
**Finish:**

**Matt Black**

**Polished Brass**

**Polished Chrome**
**Cabinet Handle**

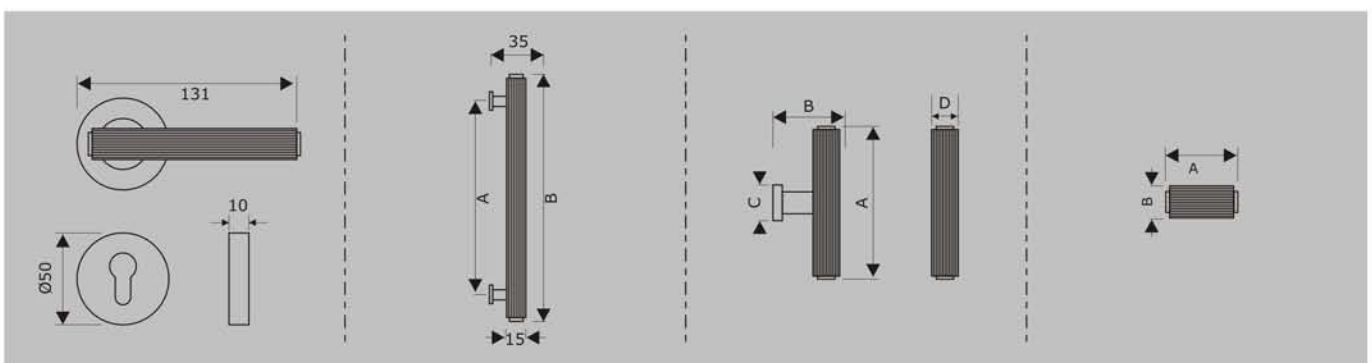

Ref. No.	Size A x B
● BLC001	: 128x158mm
● BLC002	: 160x190mm
● BLC003	: 192x222mm
● BLC004	: 224x254mm
● BLC005	: 320x350mm
● BLC006	: 500x530mm
● BLC007	: 700x730mm

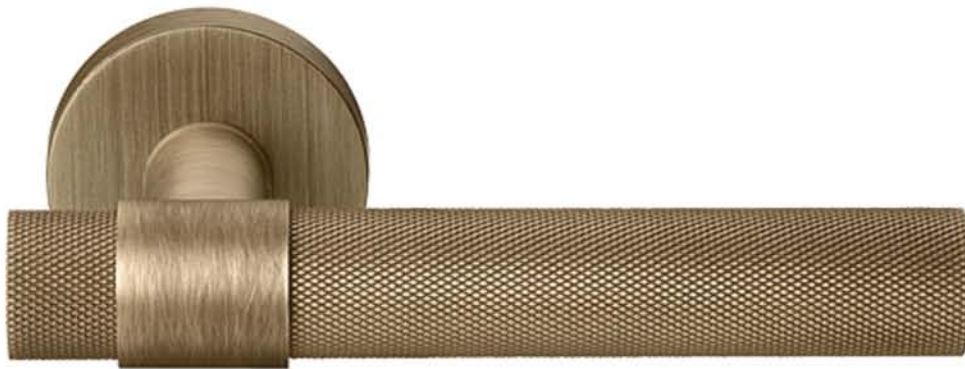
**T' Handle**


Ref. No.	Size AxBxCxD
● BLT001	: 94x50x24x20mm

**Cabinet Knob**


Ref. No.	Size AxB
● BLK001	: 30x20mm


**Finish: PC, PB, MAB, MBL**

**BLR1012**

**Matt Antique Brass**
**BLWC101  
Turn Knob**




**Finish:**

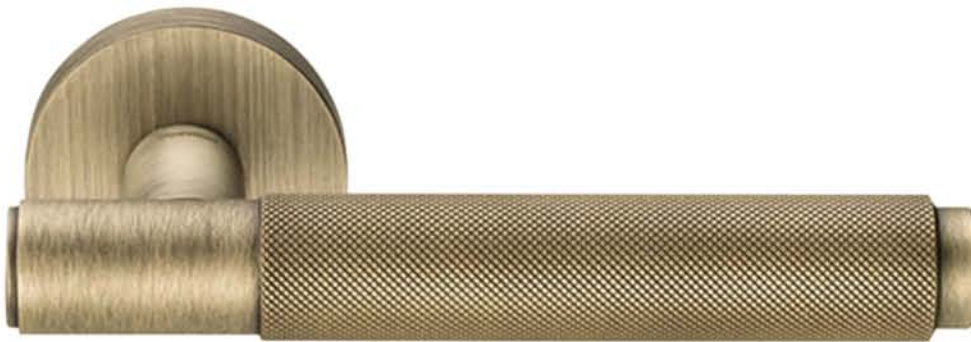
**Polished Chrome**

**Polished Brass**

**Dull Satin Brass**

**Matt Black**
**BLB1012P**

**Matt Black**

**Finish : CP, PB, MAB, DSB, MBL**



**BLR1015**

**BLWC101  
Turn Knob**

**Finish:**

**Polished Chrome**

**Polished Brass**

**Matt Antique Brass**

**Matt Black**


**Cabinet Handle**


Ref. No.	Size A x B
● BLC158	: 128x158mm
● BLC190	: 160x190mm
● BLC222	: 192x222mm
● BLC254	: 224x254mm
● BLC350	: 320x350mm
● BLC530	: 500x530mm
● BLC730	: 700x730mm

**Pull Handle**

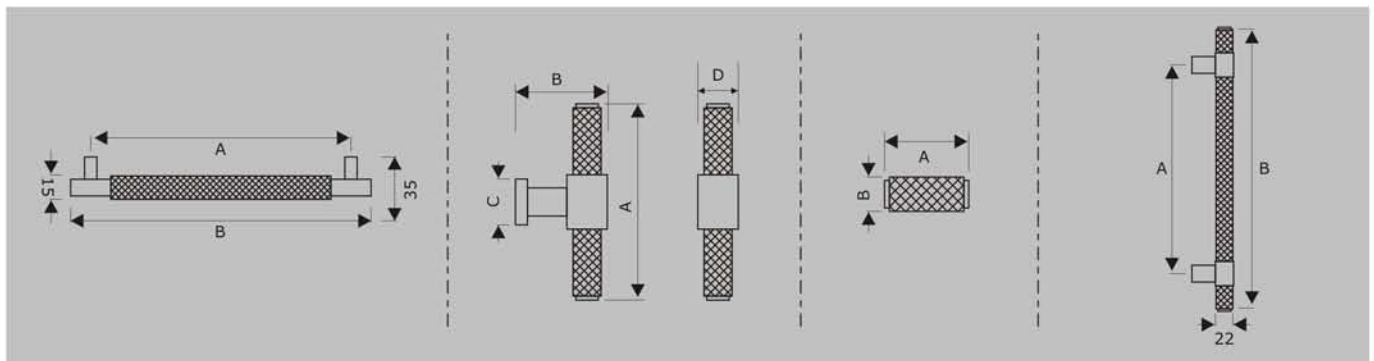

Ref. No.	Size A x B
● BPH540	: 445x540
● BPH740	: 645x740
● BPH960	: 865x960

**T' Handle**


Ref. No.	Size AxBxCxD
● BLT101	: 94x50x24x20mm

**Cabinet Knob**


Ref. No.	Size AxB
● BLK101	: 30x20mm


**Finish : CP, PB, MAB, MBL**



**BLR2080**



**BLWC801  
Turn Knob**

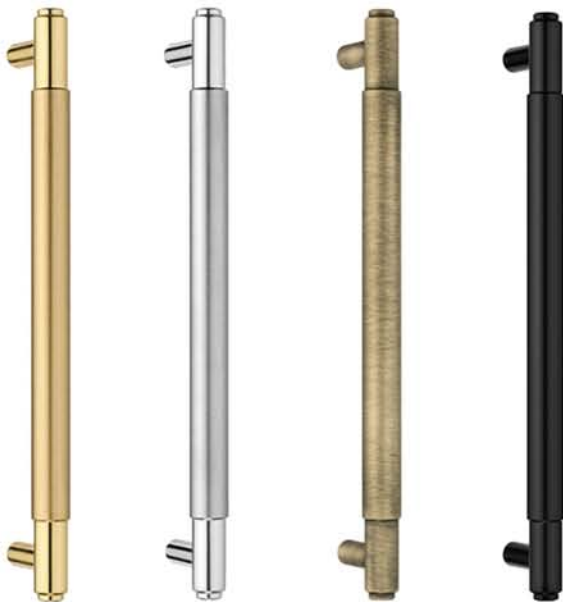
**Finish:**

**Polished Chrome**

**Polished Brass**

**Matt Antique Brass**

**Matt Black**

**Finish : CP, PB, MAB, MBL**

**Cabinet Handle**


Ref. No.	Size A x B
● BLC801	: 128x158mm
● BLC802	: 160x190mm
● BLC803	: 192x222mm
● BLC804	: 224x254mm
● BLC805	: 320x350mm
● BLC806	: 500x530mm
● BLC807	: 700x730mm

**Pull Handle**

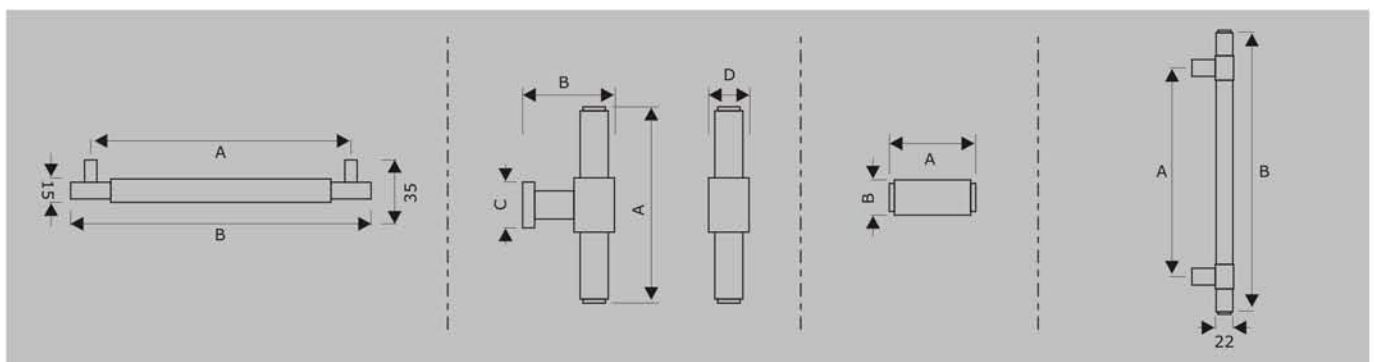

Ref. No.	Size A x B
● BPH801	: 445x540
● BPH802	: 645x740
● BPH803	: 865x960

**T' Handle**


Ref. No.	Size AxBxCxD
● BLT801	: 94x50x24x20mm

**Cabinet Knob**


Ref. No.	Size AxB
● BLK801	: 30x20mm


**Finish : CP, PB, MAB, MBL**

**BLR3510**

**Gun Metal**
**Finish:**

**Matt Black**

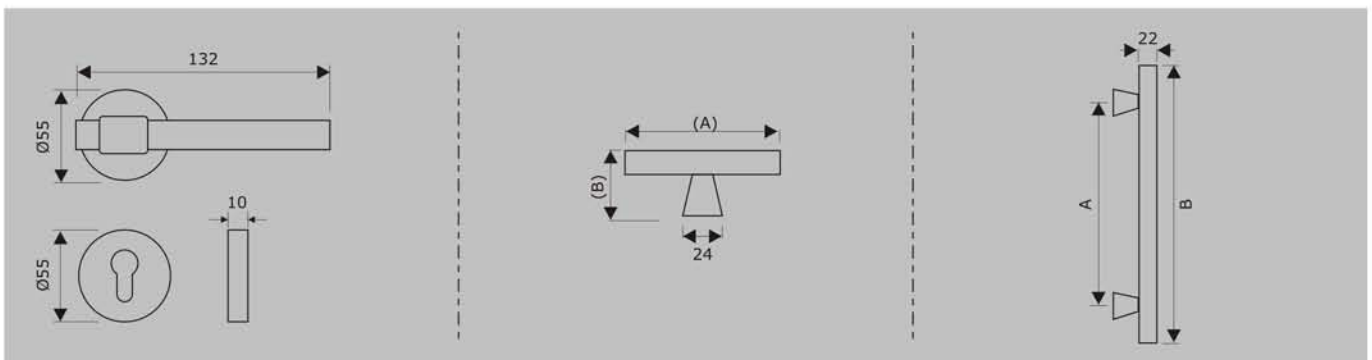
**Gun Metal**

**Polished Gold**
**Cabinet Handle**


Ref. No.	Size A	Size B
● BLC351-128	128mm	162mm
● BLC351-96	96mm	146mm

**T' Handle**


Ref. No.	Size A	Size B
● BLK351-52	101mm	32mm


**Finish: PG, GM, MBL**

**BLR3520**



**Finish:**




**Bronze**



**Matt Antique Brass**



**Matt Black**




**Finish: BRZ, MAB, MBL**



**BLR3530**

**Finish:**

**Satin Brass**

**Matt Antique Brass**

**Finish: SB, MAB**

**BLR3540**

**Matt Antique Brass**
**Finish:**

**Bronze**

**Matt Antique Brass**
**Cabinet Handle**

**Bronze**

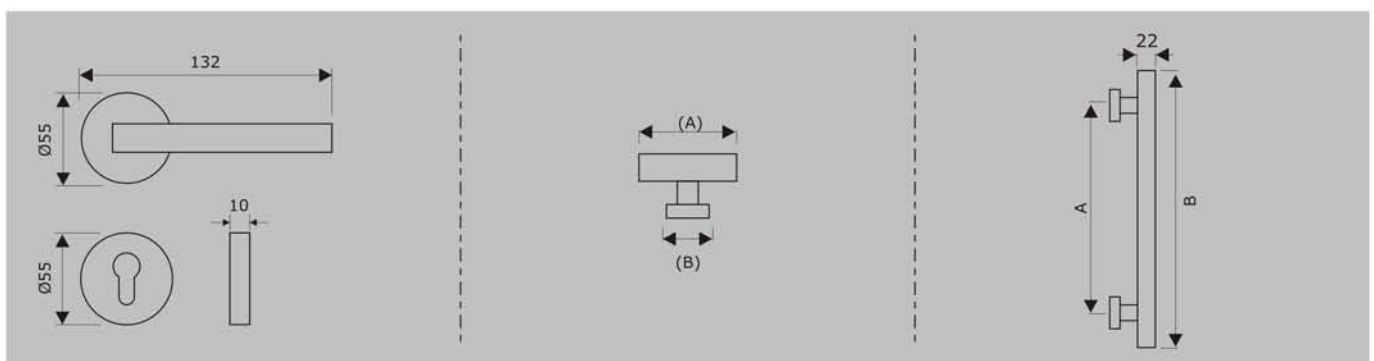
Ref. No.	Size A	Size B
• BLC354-126	126mm	155mm
• BLC354-96	96mm	120mm

**Cabinet Knob**

**Bronze**

**Matt Antique Brass**

Ref. No.	Size A	Size B
• BLK354-32	Ø32mm	20mm


**Finish: BRZ, MAB**

**BLR3550**




**Finish:**



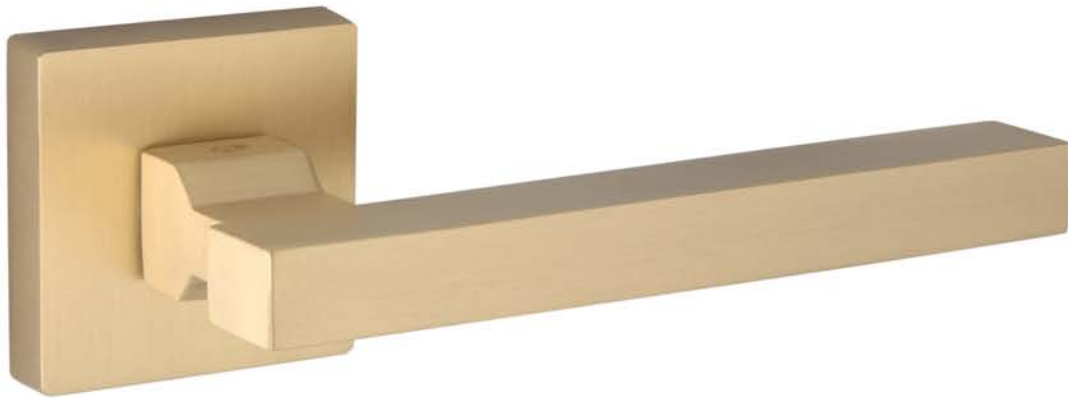
**Polished Gold**



**Gunmetal**




**Finish: PB, GM**

**BLR3560**

**Finish:**

**Matt Antique Brass**

**Satin Brass**

**Matt Black**

**Finish: SB, MAB, MBL**

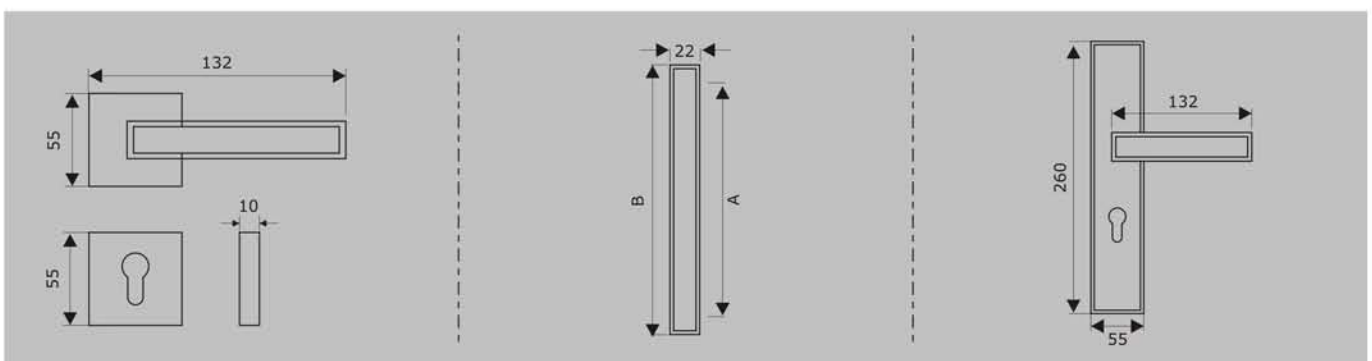


**BLR3570**


Oil Rubbed Bronze

**Cabinet Handle**


Ref. No.	Size A	Size B
• BLC357-196	196mm	: 220mm
• BLC357-126	126mm	: 150mm
• BLC357-96	96mm	: 120mm

**BLB357P**


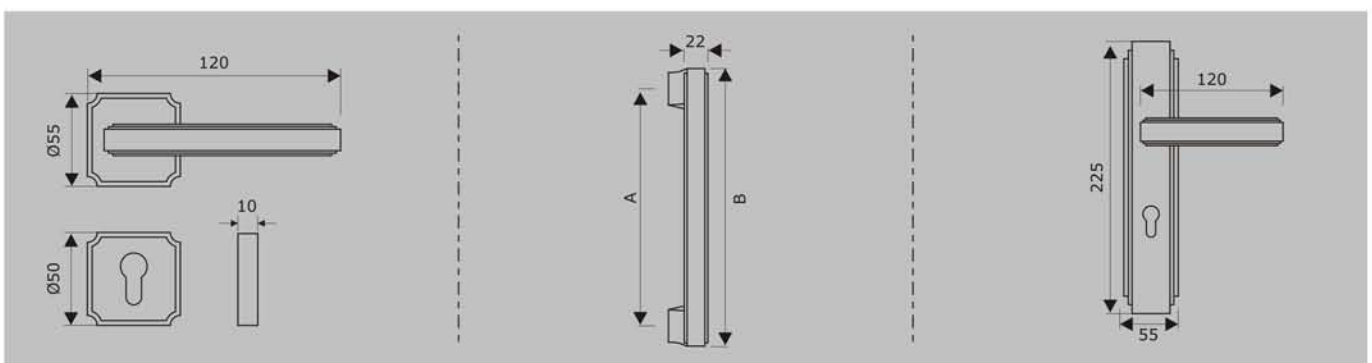
Finish: Oil Rubbed Bronze

**BLR3580**


**Dark Bronze**

**Cabinet Handle**


Ref. No.	Size A	Size B
• BLC358-126	126mm	145mm
• BLC358-96	96mm	115mm

**BLB358P**


**Finish: Dark Bronze**

**BLR2000**



**Finish:**

**Matt Satin Nickel**

**Matt Antique Brass**

**Polished Chrome**

**Polished Nickel**

**Satin Brass**

**Finish: MSN, MAB, PC, PN, SB**

**BLR2010**

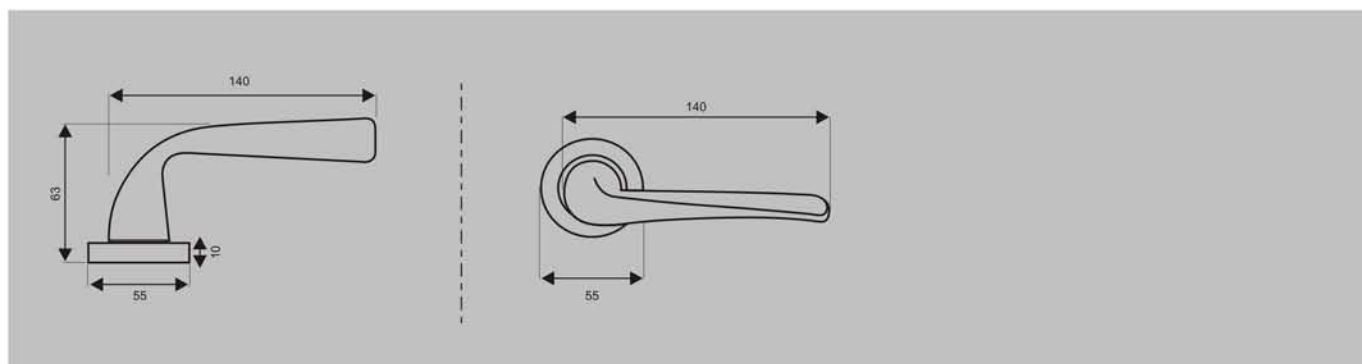
**Finish:**

**Matt Satin Nickel**

**Matt Antique Brass**

**Polished Chrome**

**Polished Nickel**

**Satin Brass**

**Finish: MSN, MAB, PC, PN, SB**



**BLR2030**

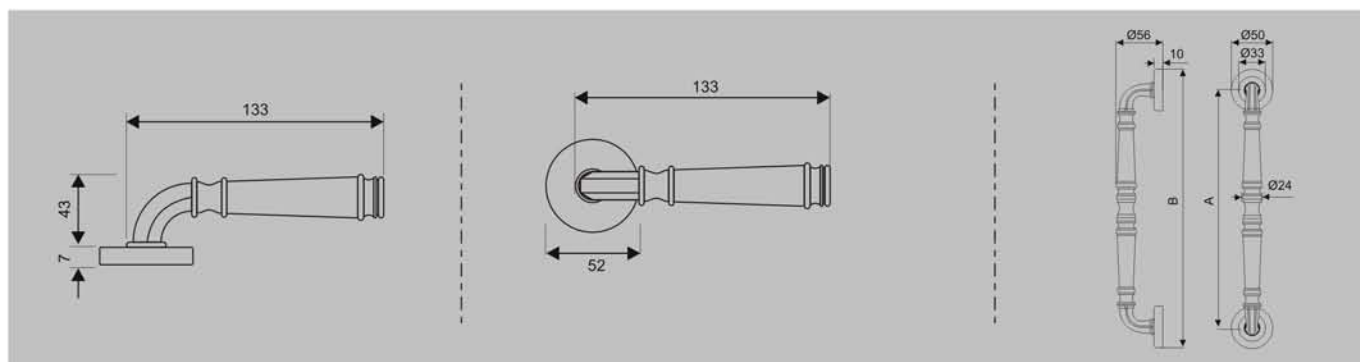
**Matt Antique Brass**
**Finish:**

**Polished Brass**

**Satin Brass**

**Matt Black**

**Antique Brass - Stress Relieved**
**Pull Handle**


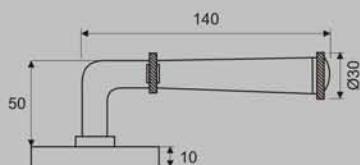
**Ref. No.      Size A x B**
**● BPH2030 : 286x336**


**BLR2035**

**Finish:**

**Matt Satin Nickel**

**Satin Brass**

**Matt Antique Brass**


**BLR2040**

**Matt Antique Brass**
**Finish:**

**Matt Black**

**Satin Brass**

**Matt Satin Nickel**

**Cabinet Handle**





Ref. No.	Size A x B x C
● BLC201	: 211x192x33.5mm
● BLC202	: 147x128x33.5mm
● BLC203	: 115x96x33.5mm


**T' Handle**

Ref. No.	Size AxBxCxD
● BLT401	: 100x40x14x18mm


**Cabinet Knob**

Ref. No.	Size AxBxC
● BLK301	: 30x30x20mm
● BLK302	: 20x26x12mm


**Finish: MSN, SB, MBL, MAB**

**BLR2050**

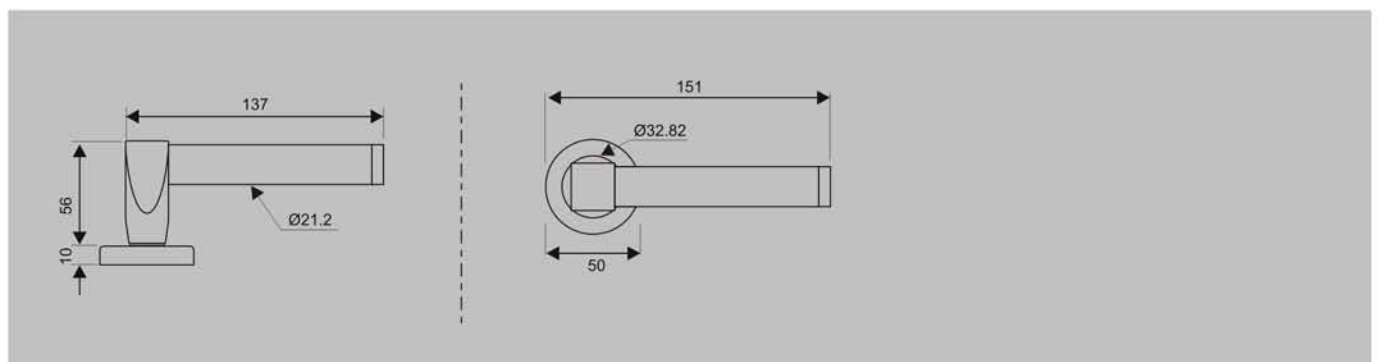
**Finish:**

**Polished Brass**

**Matt Antique Brass**

**Matt Satin Nickel**

**Satin Brass**

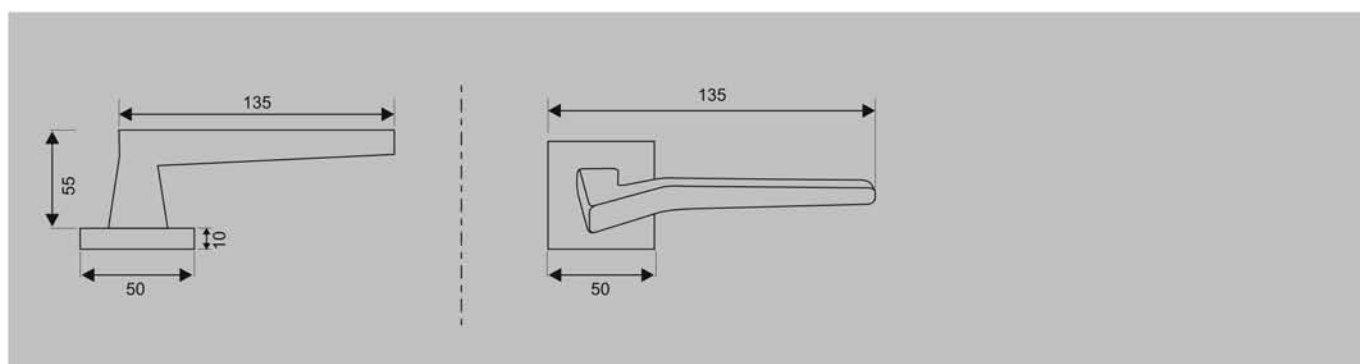
**Polished Chrome**




**BLR2060**

**Finish:**

**Satin Chrome**

**Matt Black**


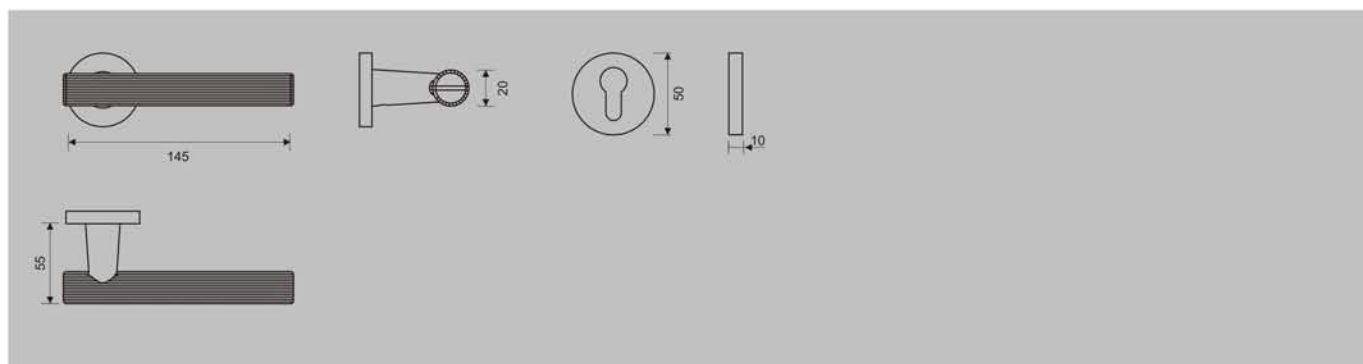
**LRZ9020**

**Finish:**

**Matt Satin Nickel/Matt Black**

**Satin Brass/Matt Black**

**GunMetal/Matt Black**

**Polished Brass/Satin Brass**


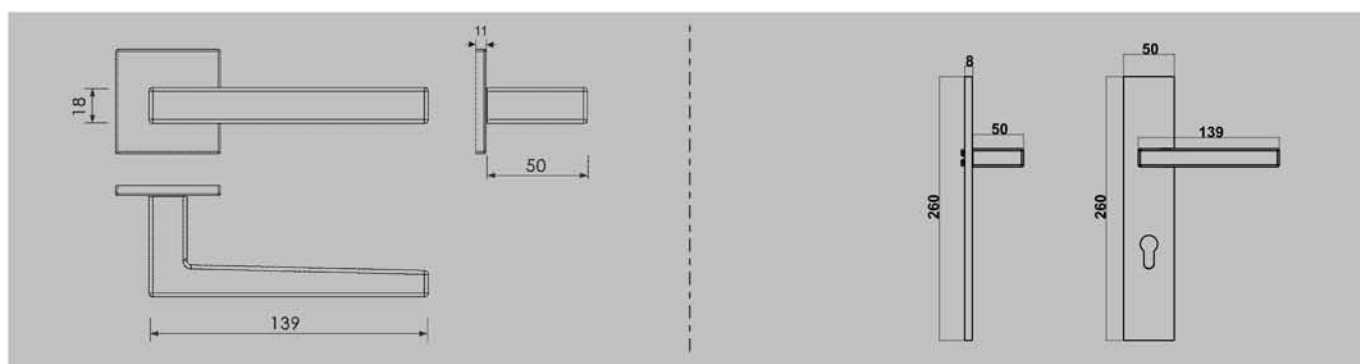
**LRZ3200**

**Finish:**

**Matt Satin Nickel**

**Matt Antique Brass**

**Satin Brass**

**Matt Black**
**BLB3200P**


**LRZ3300**

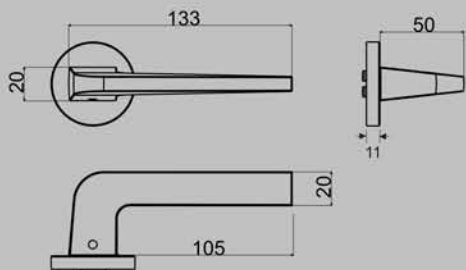
**Finish:**

**Matt Satin Nickel**

**Satin Chrome**

**Satin Brass**

**Matt Antique Brass**

**Matt Black**




**LRZ9101**

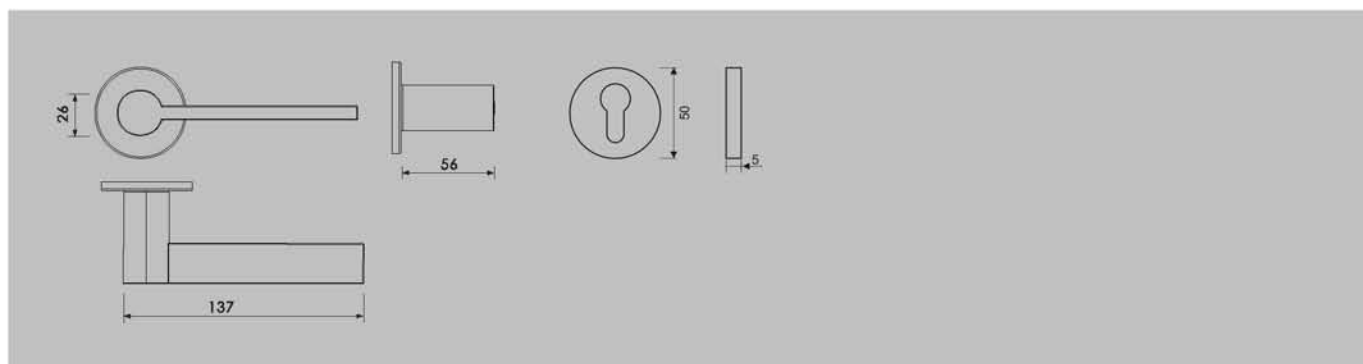
**Finish:**

**Matt Satin Nickel**

**Satin Brass**

**Matt Black**

**Polished Brass**

**Matt Antique Brass**


**LRZ9201**

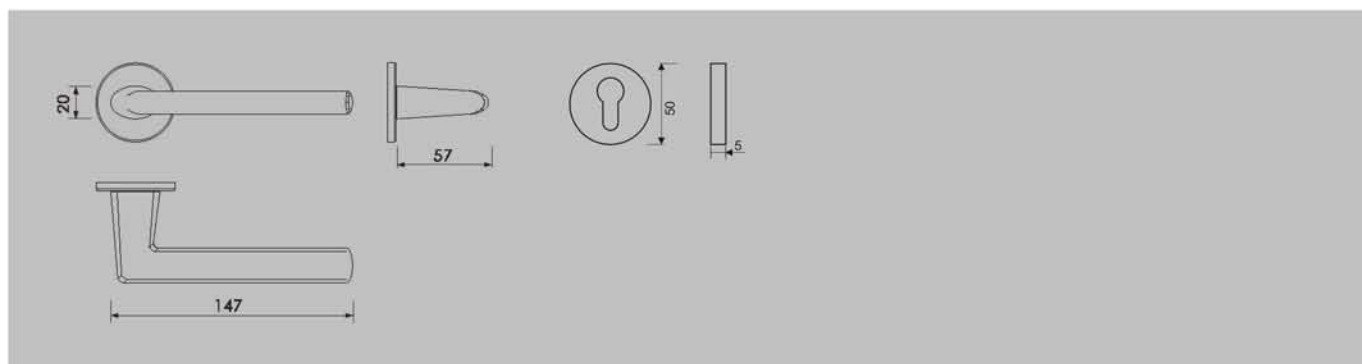
**Finish:**

**Matt Satin Nickel**

**Satin Brass**

**Matt Black**

**Polished Brass**

**Matt Antique Brass**


**LRZ9301**

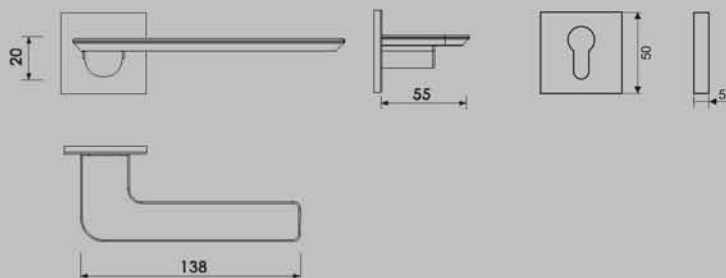
**Finish:**

**Matt Satin Nickel**

**Satin Brass**

**Matt Black**

**Polished Brass**

**Matt Antique Brass**


**LRZ9401**

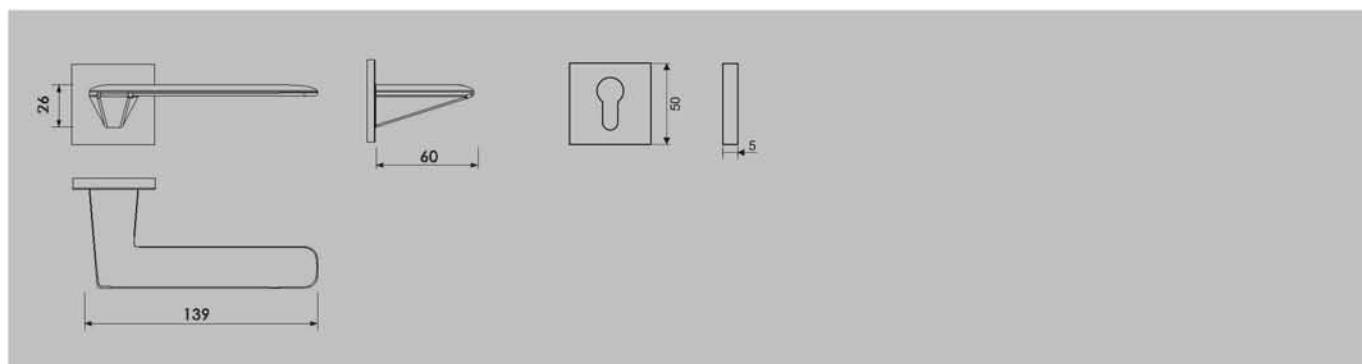
**Finish:**

**Matt Satin Nickel**

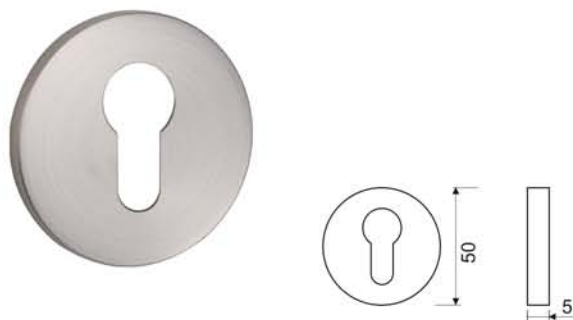
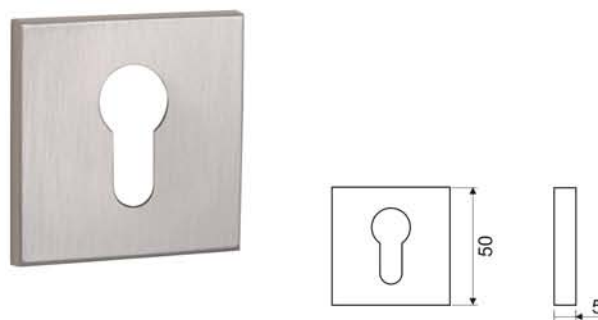
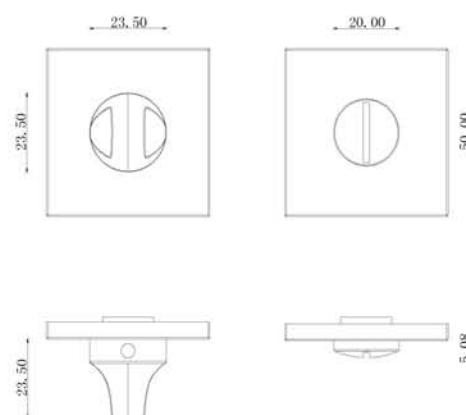
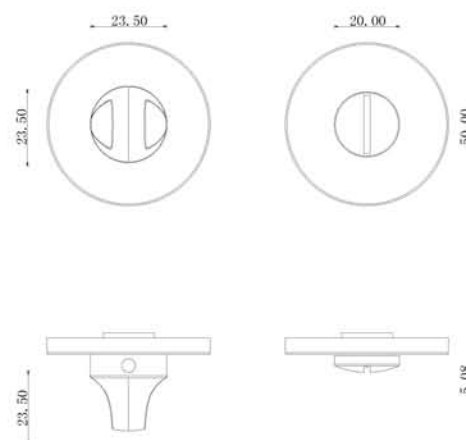
**Satin Brass**

**Matt Black**

**Polished Brass**

**Matt Antique Brass**




**ZES9000**  
Euro Profile Escutcheon

**ZES9001**  
Euro Square Escutcheon

**ZRS9002**  
Square Thumbturn and Release

**ZRS9003**  
Round Thumbturn and Release

**Finish: MSN, SB, PB, MAB, MBL**



**LRZ5000**

**Finish:**

**Matt Black**

**Satin Brass**

**Matt Antique Brass**

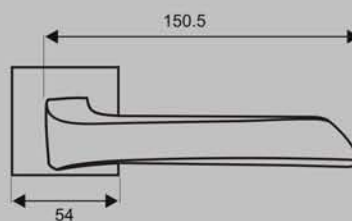
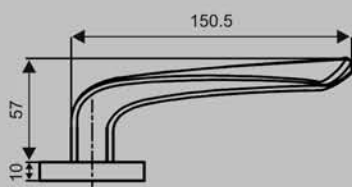
**Matt Satin Nickel**


**LRZ5005**

**Finish:**

**Satin Brass**

**Matt Antique Brass**



**Matt Satin Nickel**


**LRZ5010**

**Finish:**

**Matt Satin Nickel**

**Satin Brass**

**Matt Antique Brass**






**LRZ5015**

**Finish:**

**Matt Satin Nickel**

**Satin Brass**



**Matt Antique Brass**


**LRZ5020**

**Finish:**

**Matt Satin Nickel**

**Satin Brass**



**Matt Antique Brass**


**LRZ5025**

**Finish:**

**Matt Satin Nickel**

**Satin Brass**

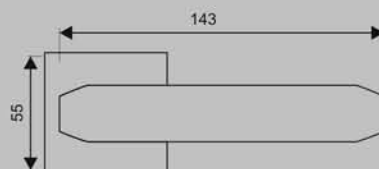
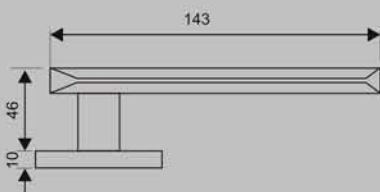
**Matt Antique Brass**


**LRZ5035**

**Finish:**

**Satin Brass**

**Matt Satin Nickel**

**Matt Antique Brass**


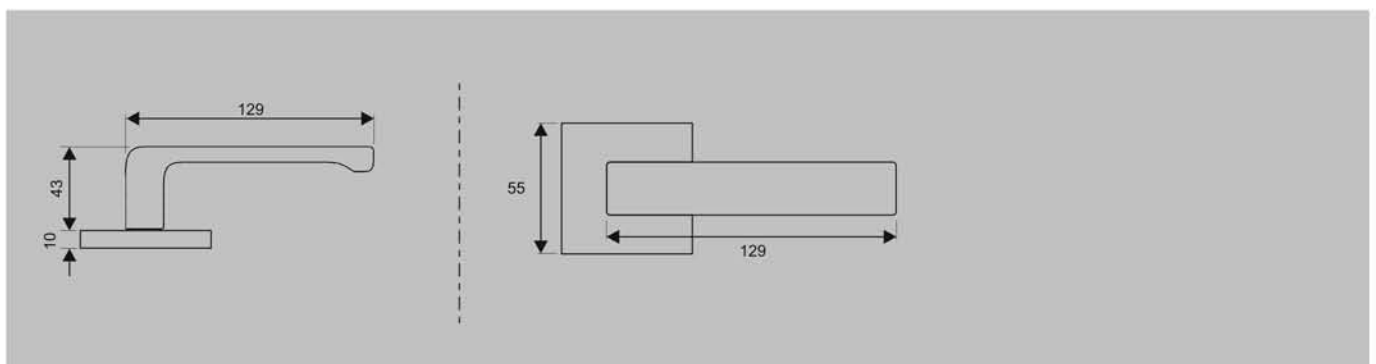


**LRZ5040**

**Finish:**

**Matt Satin Nickel**

**Satin Brass**

**Matt Antique Brass**


**LRZ6000**



**Finish:**

**Matt Satin Nickel**

**Polished Brass/PVD**

**Satin Brass**

**Matt Antique Brass**



**Polished Chrome**


**LRZ6015**

**Finish:**

**Matt Satin Nickel**

**Satin Brass**



**Matt Antique Brass**


**LRZ6025**

**Finish:**

**Matt Satin Nickel**

**Satin Brass**

**Matt Antique Brass**






**LRZ6030**

**Finish:**

**Matt Satin Nickel**

**Matt Black**

**Satin Brass**

**Matt Antique Brass**


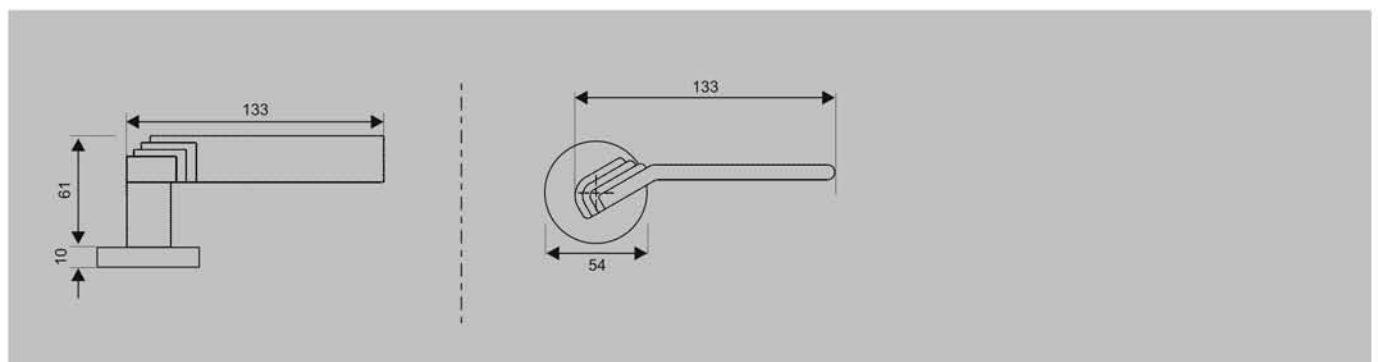
**LRZ6045**

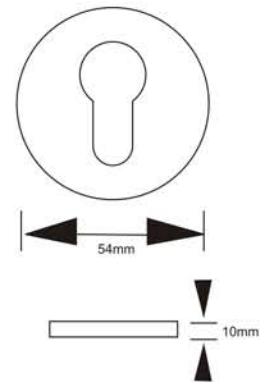
**Finish:**

**Matt Antique Brass**

**Matt Satin Nickel**

**Satin Brass**

**Polished Brass**


**ZOE6**  
**Euro Profile Escutcheon**

**Finish:**


PB



MSN



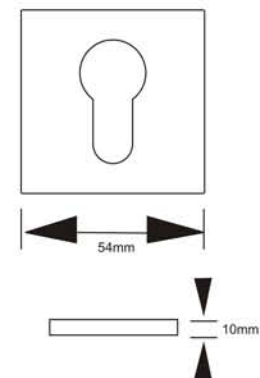
SB



MBL



MAB

**ZEE5**  
**Euro Profile Escutcheon**

**Finish:**


PB



MSN



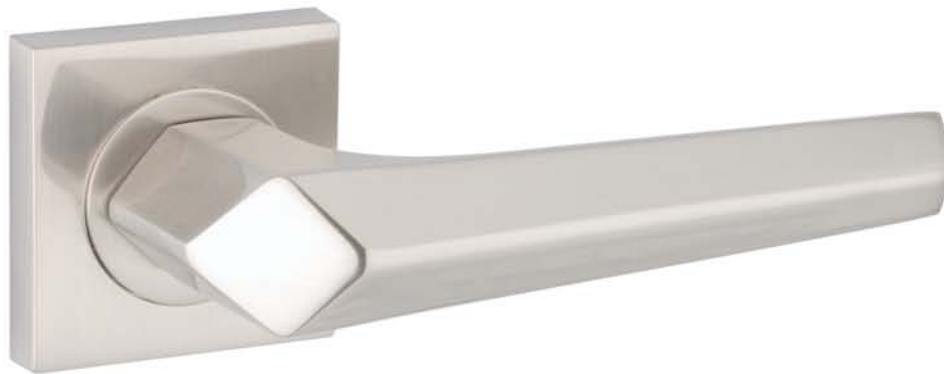
SB



MBL



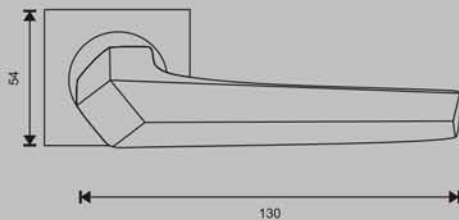
MAB

**LRZ3000**

**Finish:**

**Satin Nickel**

**Matt Antique Brass**

**Satin Brass**

**Matt Satin Nickel**


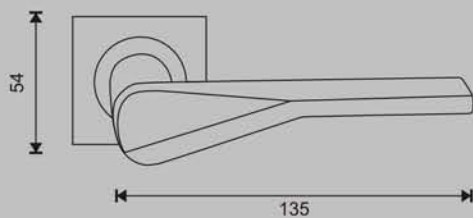


**LRZ3010**

**Finish:**

**Matt Antique Brass**

**Satin Nickel**

**Satin Brass**


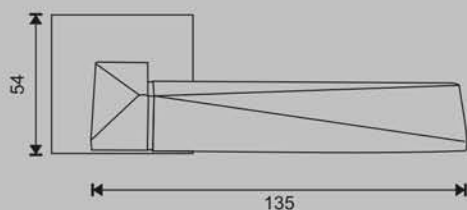
**LRZ3030**

**Finish:**

**Satin Nickel**

**Satin Brass**

**Polished Brass / PVD**

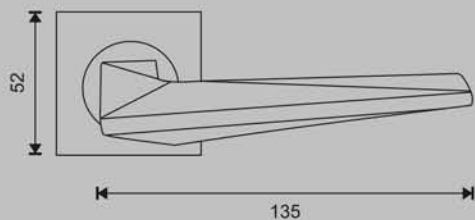
**Matt Antique Brass**


**LRZ3040**

**Finish:**

**Matt Antique Brass**

**Satin Nickel**


**Satin Brass**


**LRZ8001**

**Finish:**

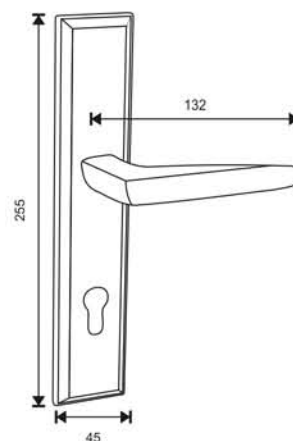
**Matt Antique Brass**

**Satin Nickel**

**Polished Brass**

**LRZ8000**

**Matt Antique brass**

**Satin Nickel**

**Polished Brass**





**LRZ8021**

**Finish:**

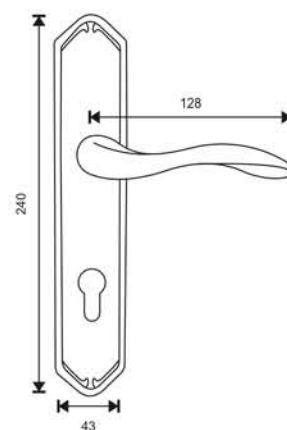
**Matt Antique Brass**

**Satin Nickel**

**Polished Brass**

**LRZ8020**

**Matt Antique Brass**

**Satin Nickel**


**Polished Brass**


**LRZ8031**

**Finish:**

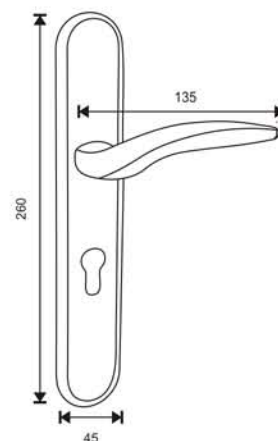
**Matt Antique Brass**

**Satin Nickel**

**Polished Brass**

**LRZ8030**

**Matt Antique Brass**

**Satin Nickel**

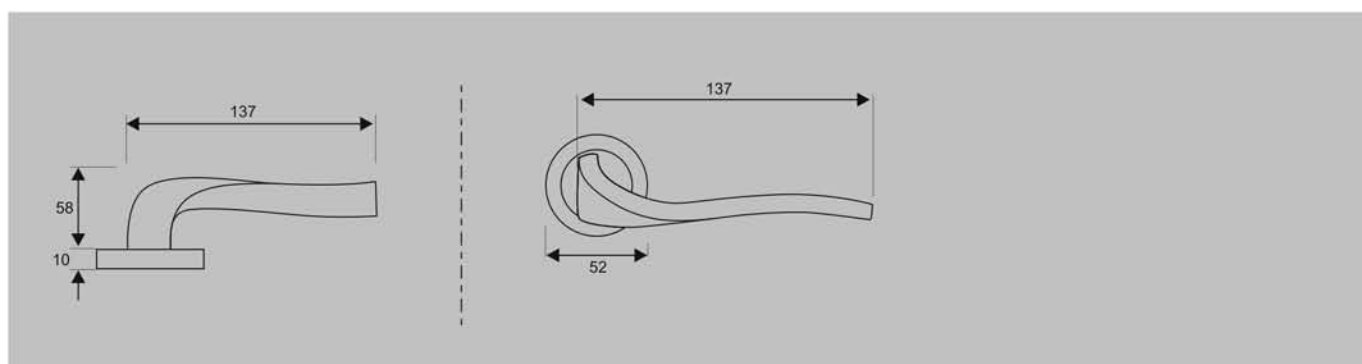
**Polished Brass**


**LRZ8041**

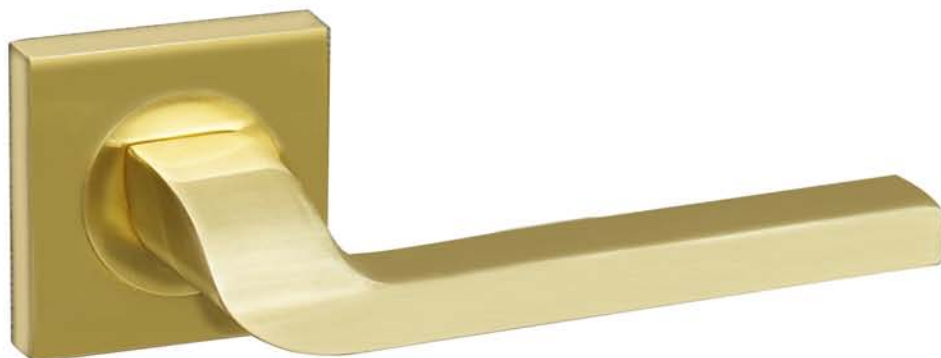
**Finish:**

**Matt Antique Brass**

**Matt Satin Nickel**

**Satin Brass**


**LRZ8051**



**Finish:**



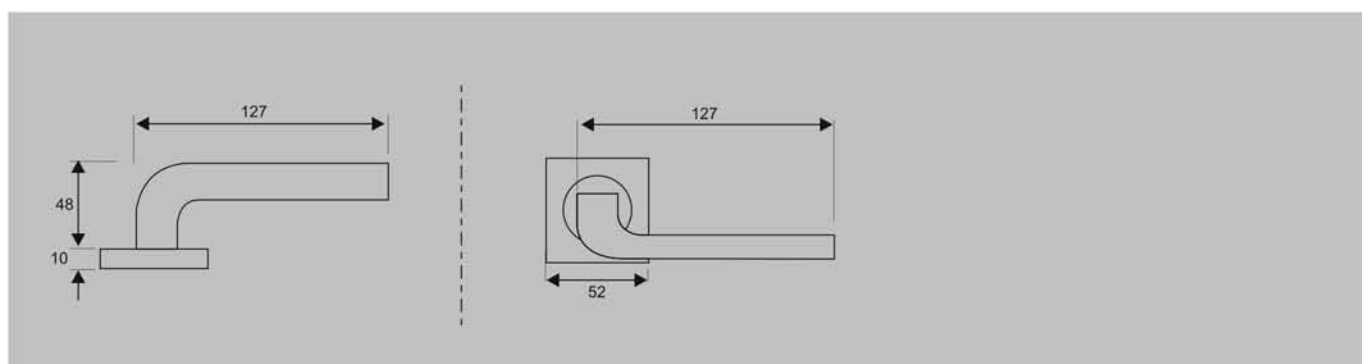
**Matt Antique Brass**



**Matt Satin Nickel**



**Satin Brass**



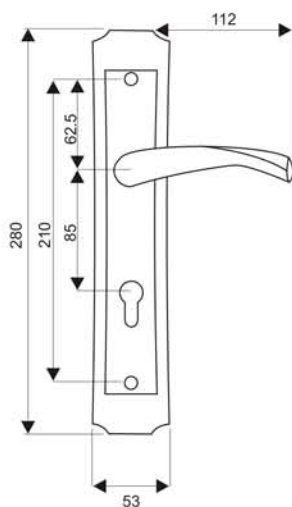




A3541



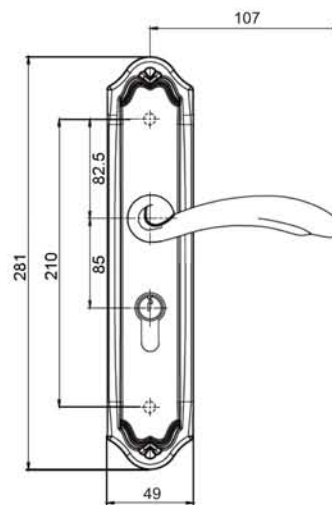
Finish: MAB, AC



A6436



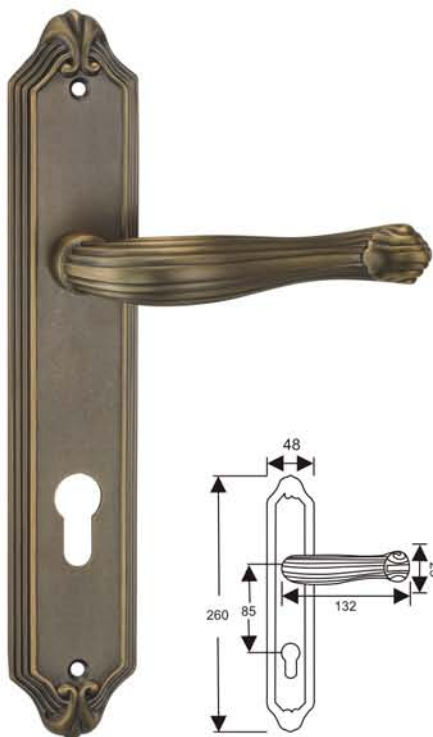
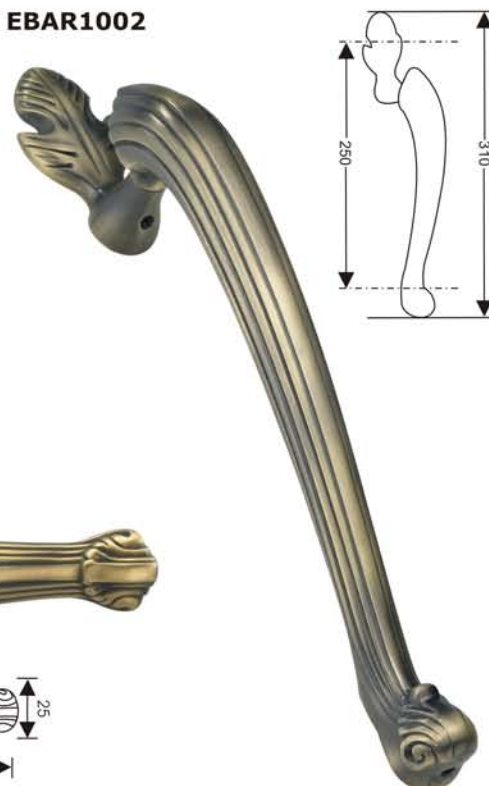
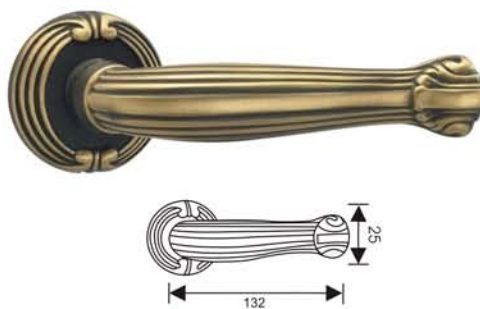
Finish: MAB, AC



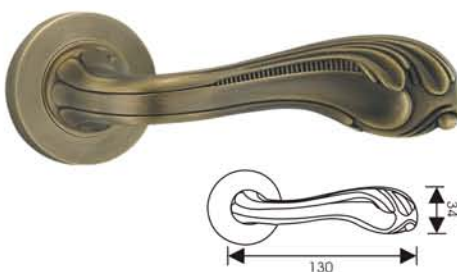
### Features

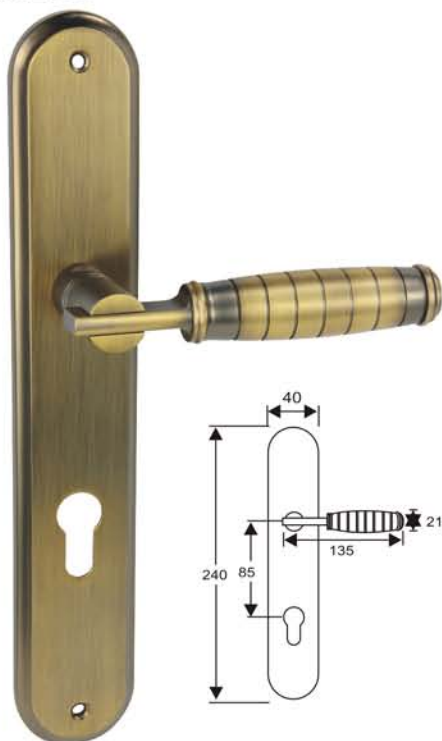
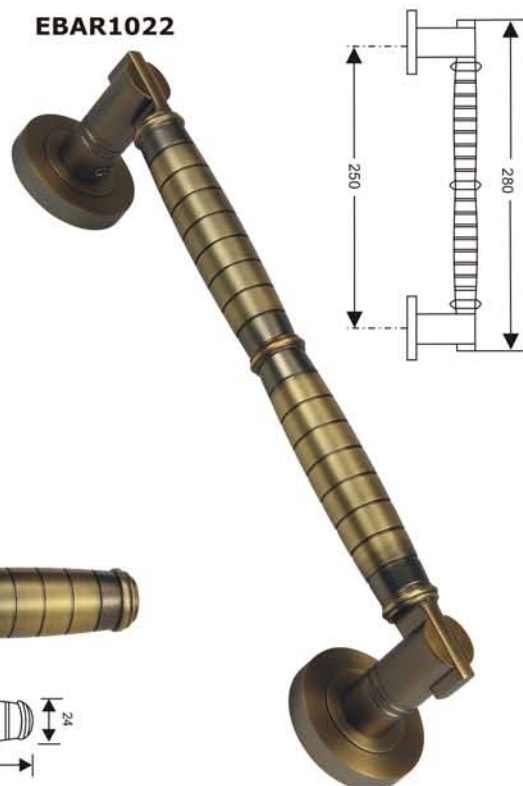
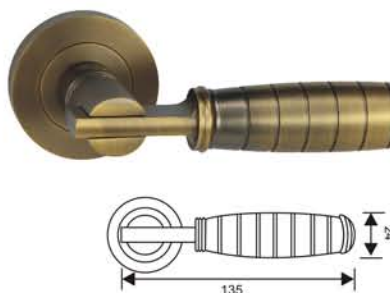
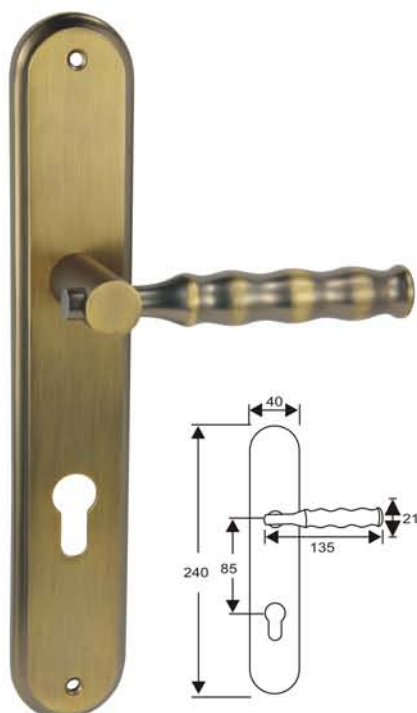
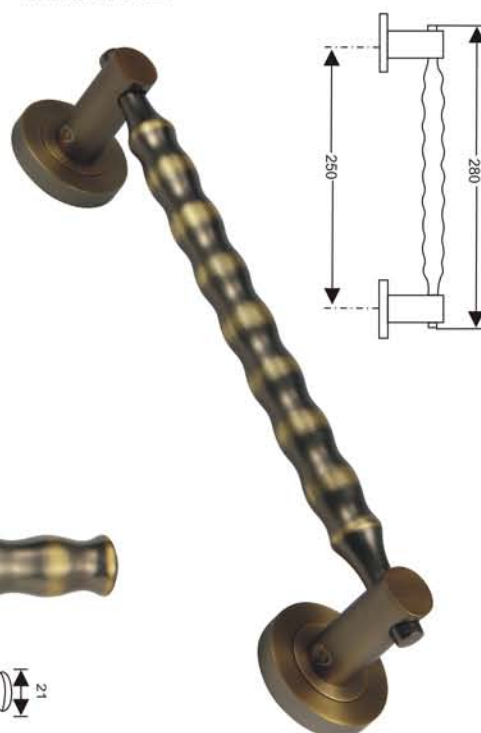
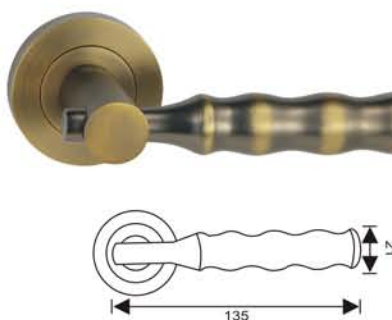
- Material : Forged Brass
- Available in 72 or 85mm centres
- Sprung furniture, supplied with wood screws fixings



**EBAR1000**

**Finish: MAB**
**EBAR1002**

**EBAR1001**

**EBAR1010**

**Finish: MAB**
**EBAR1012**

**EBAR1011**


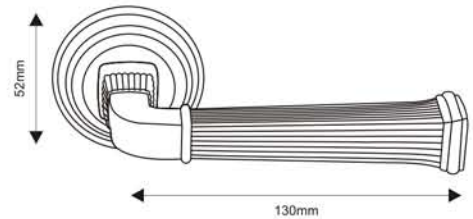
**EBAR1020**

**Finish: MAB**
**EBAR1022**

**EBAR1021**

**EBAR1030**

**Finish: MAB**
**EBAR1032**

**EBAR1031**




**EBAR1035**

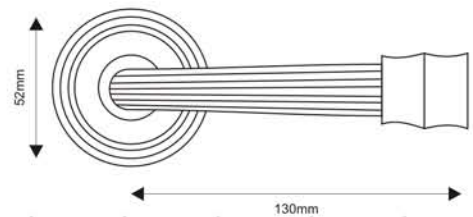


**Finish: MAB**

- Traditionally finished
- Long lasting brilliance
- Sprung furniture, supplied with wood screw fixings

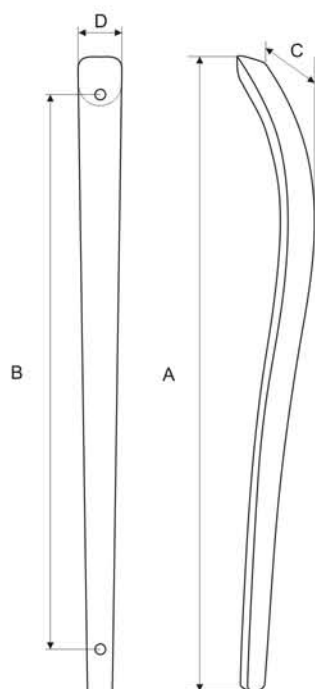

**EBAR1037**

**Finish: MAB**

- Traditionally finished
- Long lasting brilliance
- Sprung furniture, supplied with wood screw fixings

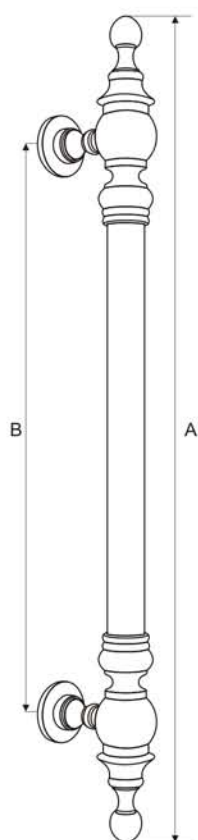

**EEZ801**  
**Round**

**EEZ901**  
**Square**

**Finish: MAB, PB, MSN, SN**



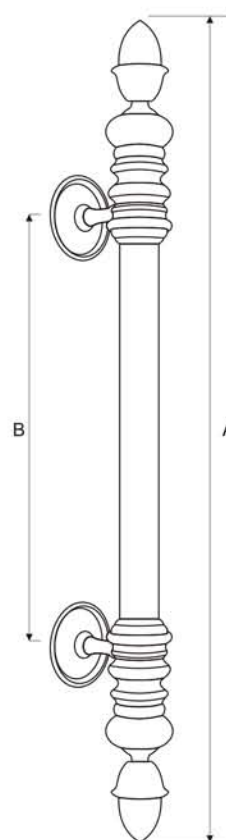
**Lina Pull Handle**

**Finish: MSN, SB, MBL, MAB**


Ref. No.	Size AxBxCxD
----------	--------------

- BPH471 : 354x305x55x33mm
- BPH472 : 500x457x55x33mm
- BPH473 : 660x610x55x33mm

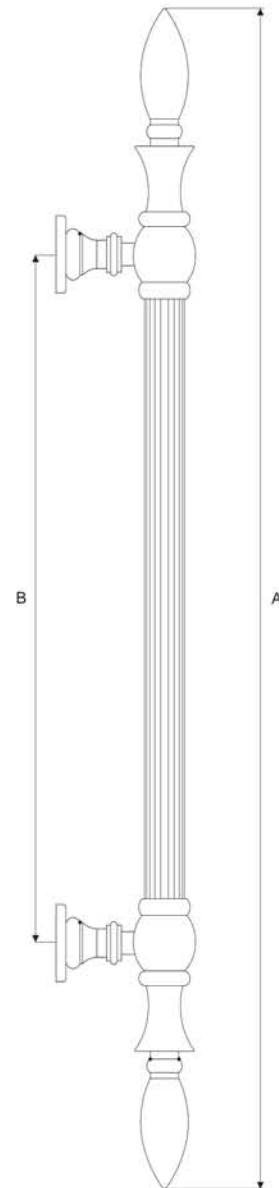
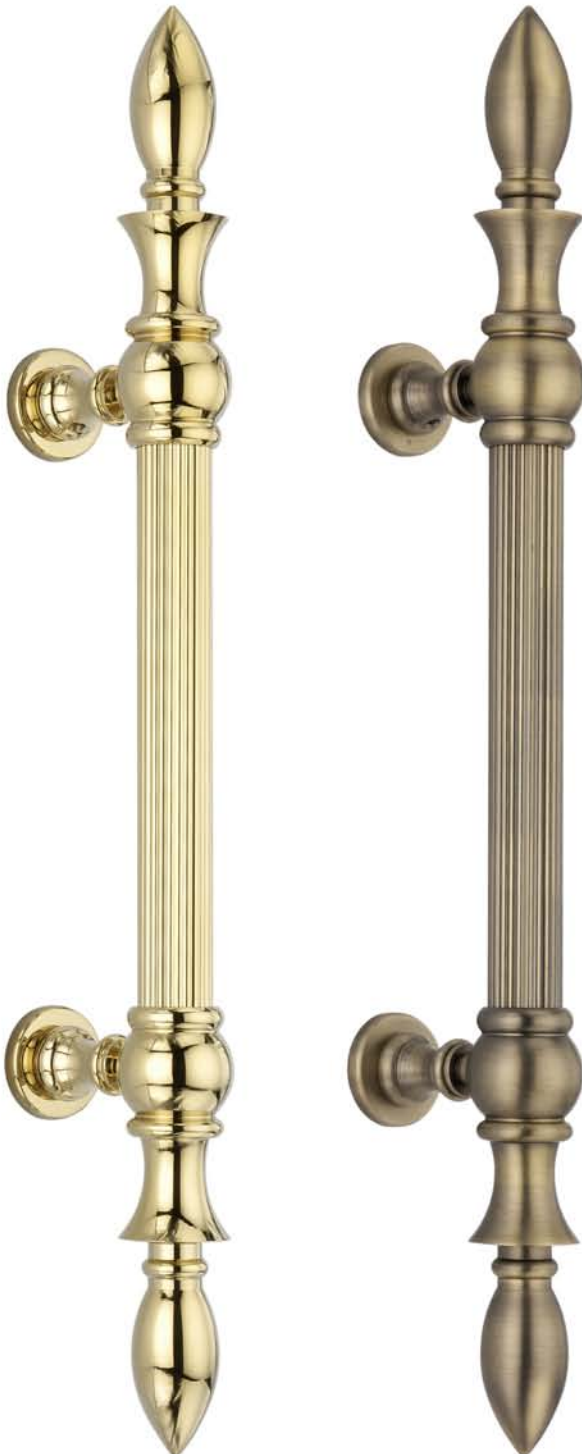
**Mestre Pull Handle**


Ref. No.	Size (AxB)
● BPH871	775x550

**Innova Pull Handle**


Ref. No.	Size (AxB)
● BPH972	850x450

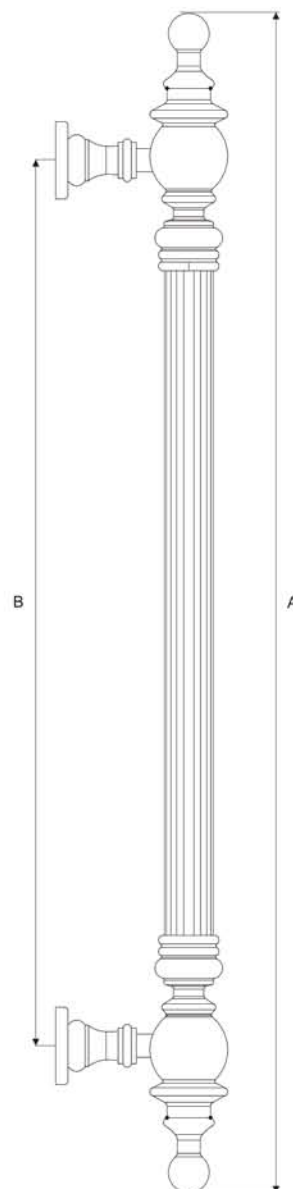
**Finish: PB, MAB, SB**

**Ardea Pull Handle**


Ref. No.	Size (AxB)
----------	------------

- BPH671 : 480x230
- BPH672 : 600x350

**Finish: PB, MAB, SB**

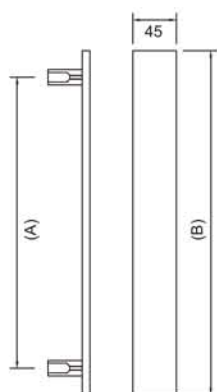
**Cassia Pull Handle**


Ref. No.	Size (AxB)
----------	------------

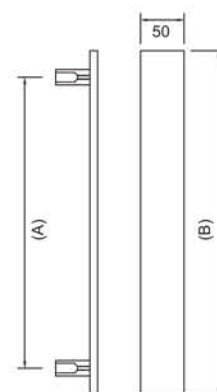
- BPH771 : 480x330
- BPH772 : 600x450

**Finish: PB, MAB, SB**



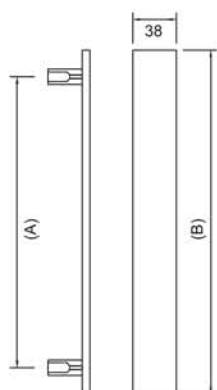
**Woody Pull Handle**


Ref. No.	Size (AxB)
● BPH601	300x400mm
● BPH602	500x600mm
● BPH603	700x800mm

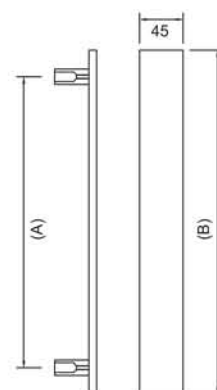
**Finish: MAB, SB, SN, PB**
**Ripple Pull Handle**


Ref. No.	Size (AxB)
● BPH611	300x400mm
● BPH612	500x600mm
● BPH613	700x800mm

**Finish: MAB, SB, SN, PB**


**Side Grooves Pull Handle**


Ref. No.	Size (AxB)
● BPH621	300x400mm
● BPH622	500x600mm
● BPH623	700x800mm

**Hammered Pull Handle**


Ref. No.	Size (AxB)
● BPH631	300x400mm
● BPH632	500x600mm
● BPH633	700x800mm

MAC


**Center Door Knob**

**CDB5010** : 100 x 100mm

**CDB5011** : 150 x 150mm


**Cabinet Knob**

**CKB211** : 38mm



MAB



MAS

**Finish: MAB, SB, SN**

**Finish: MAC, MAB, MAS**

**Oct**


Ref. No.	Size(A x B x C)
● P15-30	: 67 x 56 x 58mm

A - Rose Dia

B - Knob

C - Projection

**Finish: SN, ORB, PVD, AB**

**Chancery**


Ref. No.	Size(A x B x C)
● P17-30	: 66 x 56 x 57mm

A - Rose Dia

B - Knob

C - Projection

**Finish: SN, ORB, PVD, AB**

**Reeded**


Ref. No.	Size(A x B x C)
● MK4080	: 67 x 51 x 83mm

A - Rose Dia

B - Knob

C - Projection

**Finish: PB, CP, SC, SN, AB**



**Ball**


CF



MAB

Ref. No.    Size(A x B x C)

- BMK359 : 55 x 55 x 60mm

A - Rose Dia

B - Knob

C - Projection

Finish: MAB, CF, MBL

**Regent**


Ref. No.    Size(A x B x C)

- MK4105 : 75 x 90 x 92mm

A - Rose Dia

B - Knob

C - Projection

Finish: PB, CP, SC, SN, AB

**Callis**


Ref. No.    Size(A x B x C)

- MK4102 : 67 x 60 x 69mm

A - Rose Dia

B - Knob

C - Projection

Finish: PB, CP, SC, SN, AB



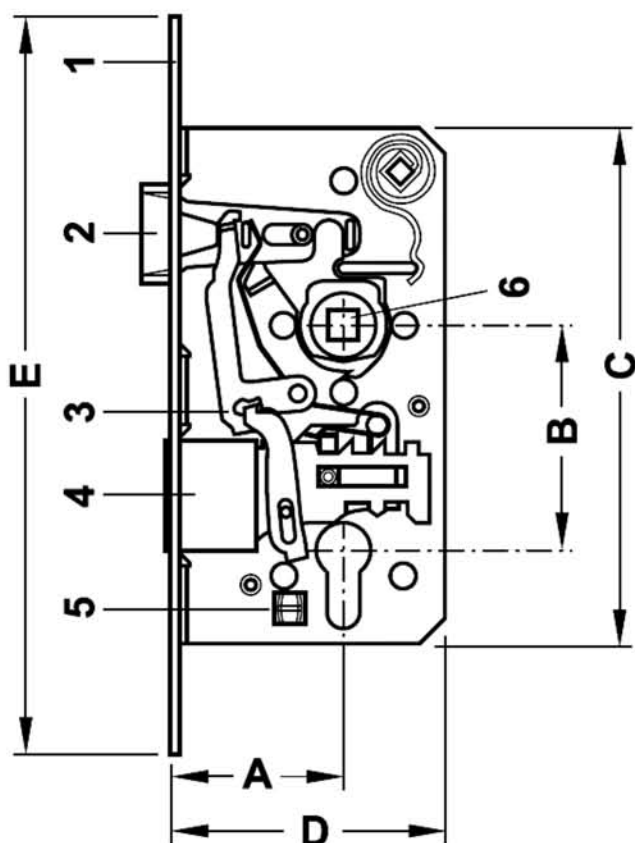


# Introduction - Mortice Locks

The EuroArt range of architectural locks is manufactured to the highest engineering standards and designed to offer a high price/performance ratio. They have been successfully type tested to all the requirements of BS EN 12209.

## Features

- Stainless steel forend and strike plate.
- Reversible latchbolt.
- Solid stainless steel latchbolt.
- Stainless steel spindle follower.
- Flush fitting case rivets and screws.
- Solid stainless steel deadbolt.



- 1 Forend
- 2 Latchbolt
- 3 Key action
- 4 Deadbolt
- 5 Screw channel for profile cylinder
- 6 Lever follower

- A Backset
- B Distance
- C Case height
- D Case width
- E Forend length
- F Forend width

### Guarantee

EuroArt mortice locks are supplied with a 10 year guarantee.

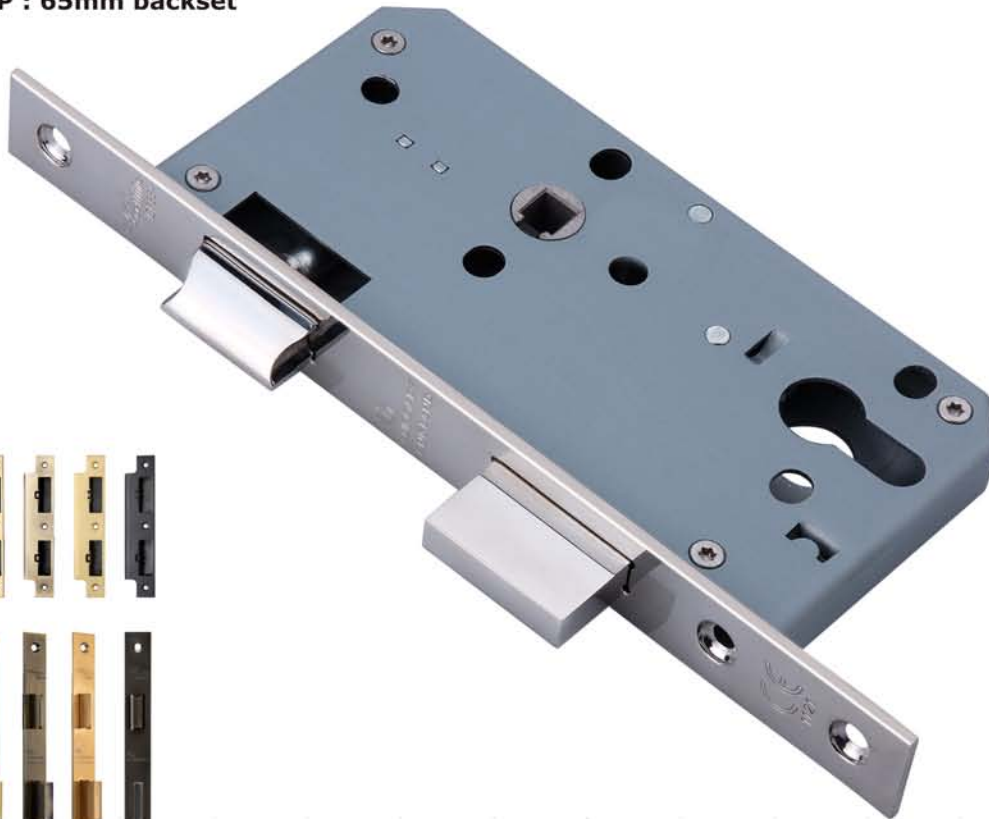
See each individual product page for details.

EuroArt DIN architectural range of Locks is a full suite of heavy duty mortice locks and latches designed to support the entire EuroArt range of levers, knobs and other unsprung furniture. The range is suitable for general commercial and heavy industrial use.

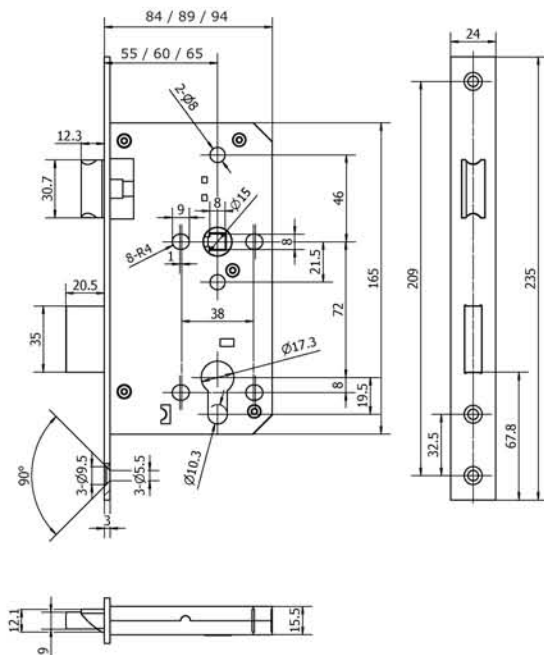
Offering complementary build quality, design integrity, and choice of external finishes, EuroArt guarantees the perfect match between form and function whenever you specify EuroArt architectural ironmongery. With fire safety and security in mind, EuroArt have design this series. Solid stainless steel latchbolts, deadbolts, followers, forend and strike plates provide enhanced durability and security.

Rebate conversion are available to allow locks to be fitted in most rebated door sections.

DLA7255EP : 55mm backset  
DLA7260EP : 60mm backset  
DLA7265EP : 65mm backset



**Finish: SSS, PSS, PB/PVD, SB/PVD, MAB, BL/PVD**



### Features

- 55/60/65mm backset, 72mm centres.
- SS 304 forend, strike plate and follower.
- SS 304 latch bolt, SS 304 dead bolt.
- Tested to Grade X: 200,000 test cycles.
- Forend and strike plate available square or radius.
- Pierced to accept bolt through furniture and escutcheons at 38mm centres.
- Suitable for 120min timber and 240min metal doors.
- Cylinder can withdraw both latch and deadbolt - offers convenience and safety combined with security.
- For use by public where there is little incentive to exercise care and high chance of misuse.
- Supplied with anti-rattle strike plate.

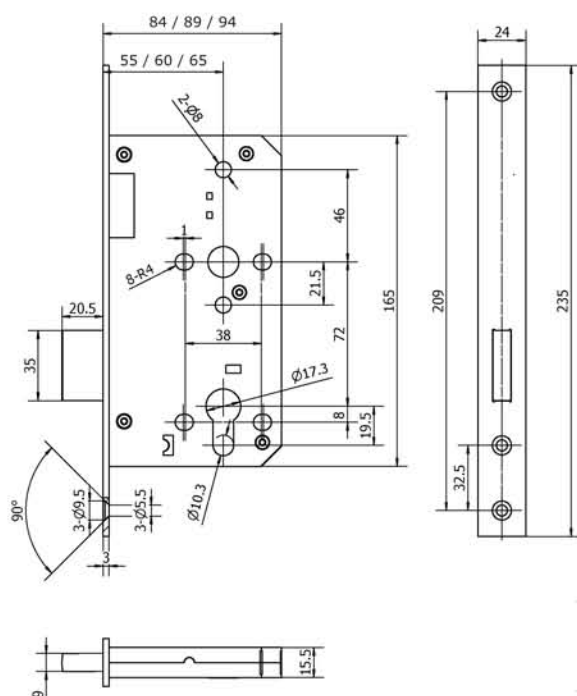
### BS EN 12209 Classification

3	X	8	1	0	G	3	B	C	2	0
---	---	---	---	---	---	---	---	---	---	---



**DLA0055EP : 55mm backset**  
**DLA0060EP : 60mm backset**  
**DLA0065EP : 65mm backset**

**Finish: SSS, PSS, PB/PVD, SB/PVD, MAB, BL/PVD**



### Features

- 55/60/65mm backset
- SS 304 forend, strike plate
- SS 304 dead bolt
- Tested to Grade X: 200,000 test cycles
- Forend and strike plate available square or radius
- Pierced to accept bolt through furniture and escutcheons at 38mm centres
- Suitable for 120min timber and 240min metal doors
- Cylinder can withdraw deadbolt - offers safety combined with security
- For use by public where there is little incentive to exercise care and high chance of misuse

### BS EN 12209 Classification

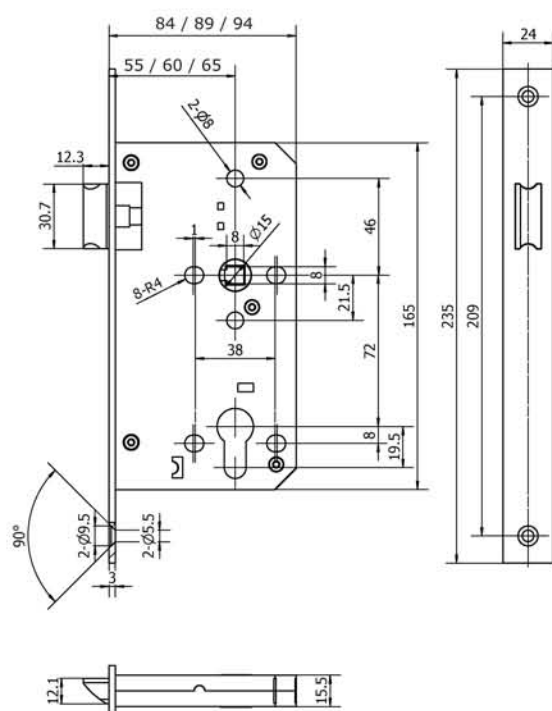
3	X	8	1	0	G	3	B	C	0	0
---	---	---	---	---	---	---	---	---	---	---





**DLA0055L : 55mm backset**  
**DLA0060L : 60mm backset**  
**DLA0065L : 65mm backset**

**Finish: SSS, PSS, PB/PVD, SB/PVD, MAB, BL/PVD**



### Features

- 55/60/65mm backset
- SS 304 forend, strike plate and follower
- SS 304 Latch
- Tested to Grade X: 200,000 test cycles
- Forend and strike plate available square or radius
- Pierced to accept bolt through furniture at 38mm centres
- Suitable for 120min timber and 240min metal doors
- Lever Handle operates latch
- For use by public where there is little incentive to exercise care and high chance of misuse

### BS EN 12209 Classification

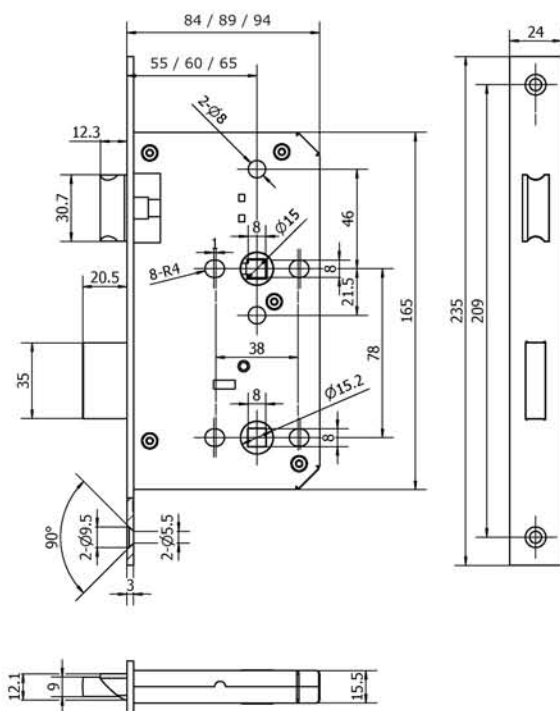
3	X	8	1	0	G	0	B	C	2	0
---	---	---	---	---	---	---	---	---	---	---





**DLA7855WC : 55mm backset**  
**DLA7860WC : 60mm backset**  
**DLA7865WC : 65mm backset**

**Finish: SSS, PSS, PB/PVD, SB/PVD, MAB, BL/PVD**



## Features

- 55/60/65mm backset, 78mm centres
- SS 304 forend, strike plate and follower
- SS 304 latch bolt, SS 304 dead bolt
- Tested to Grade X: 200,000 test cycles
- Forend and strike plate available square or radius
- Pierced to accept bolt through furniture and escutcheons at 38mm centres
- Lever handle retracts latchbolt. Thumbturn operates deadbolt

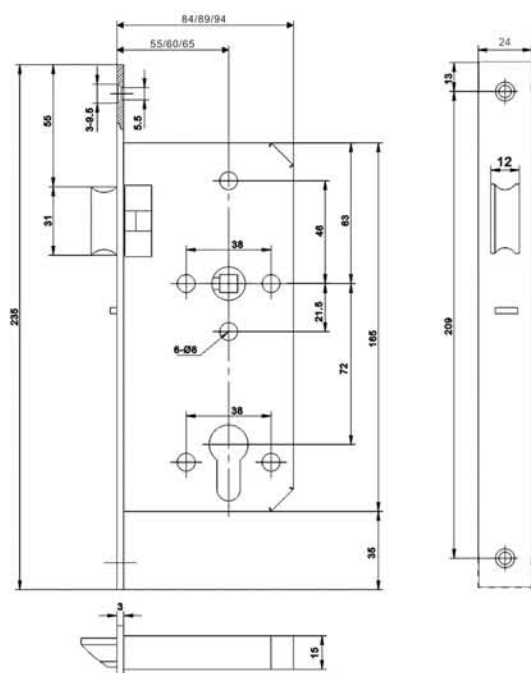
**BS EN 12209** Classification

3	X	9	1	0	G	-	B	0	2	0
---	---	---	---	---	---	---	---	---	---	---



**DLA7255NL : 55mm backset**  
**DLA7260NL : 60mm backset**  
**DLA7265NL : 65mm backset**

**Finish: SSS, PSS, PB/PVD, SB/PVD, MAB, BL/PVD**



### Features

- 55/60/65mm backset, 72mm centres
- SS 304 forend, strike plate and follower
- SS 304 latch bolt
- Tested to Grade X: 200,000 test cycles
- Forend and strike plate available square or radius
- Pierced to accept bolt through furniture and escutcheons at 38mm centres
- Suitable for doors where single action of escape is required. The door will be re-locked automatically when it closes and the security will be ensured
- Latchbolt operated by lever handle or key

### BS EN 12009 Classification

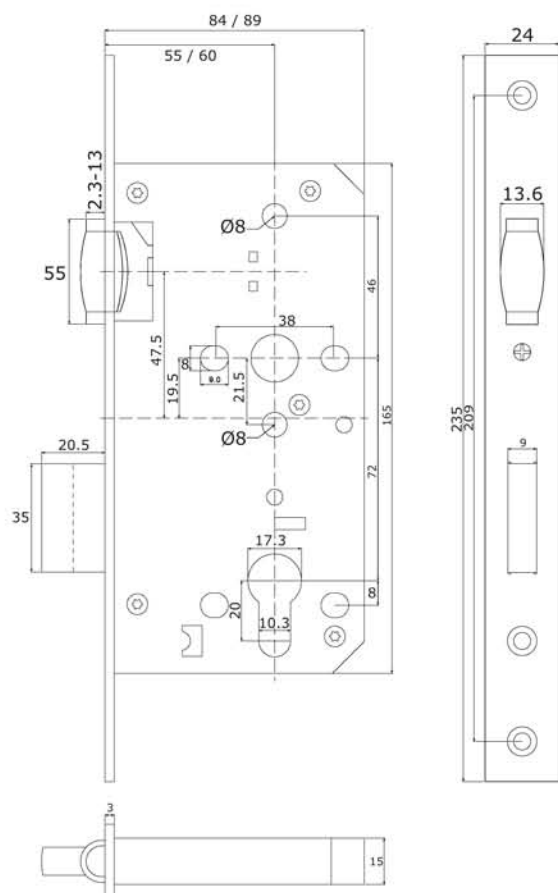
3	X	9	1	0	G	2	B	B	2	0
---	---	---	---	---	---	---	---	---	---	---



**DLA0055RL : 55mm backset**

**DLA0060RL : 60mm backset**

**Finish: SSS, PSS, PB/PVD, SB/PVD, MAB, BL/PVD**



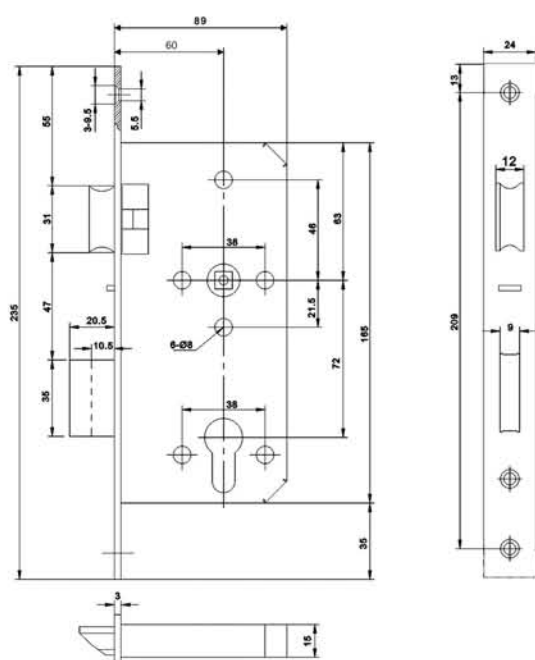
### Features

- 55/60mm backset
- SS 304 forend and strike plate
- SS 304 roller bolt, SS 304 dead bolt
- BS EN12209 performance tested
- Forend and strike plate available square or radius
- Pierced to accept bolt through furniture and escutcheons at 38mm centres




**DLA7260ESC : 60mm backset**

Finish: SSS, PSS, PB/PVD, SB/PVD, MAB, BL/PVD


**Features**

- 60mm backset, 72mm centres
- SS 304 forend and strike plate
- SS 304 latch bolt, SS 304 dead bolt
- SS 304 spindle follower
- Forend and strike plate available square or radius
- Pierced to accept bolt through furniture and escutcheons at 38mm centres
- Suitable for doors where single action of escape as well as high security is required.
- Inside lever handle can withdraw both latch and deadbolt in one action, allowing quick escape for fire and safety reasons, without compromising security



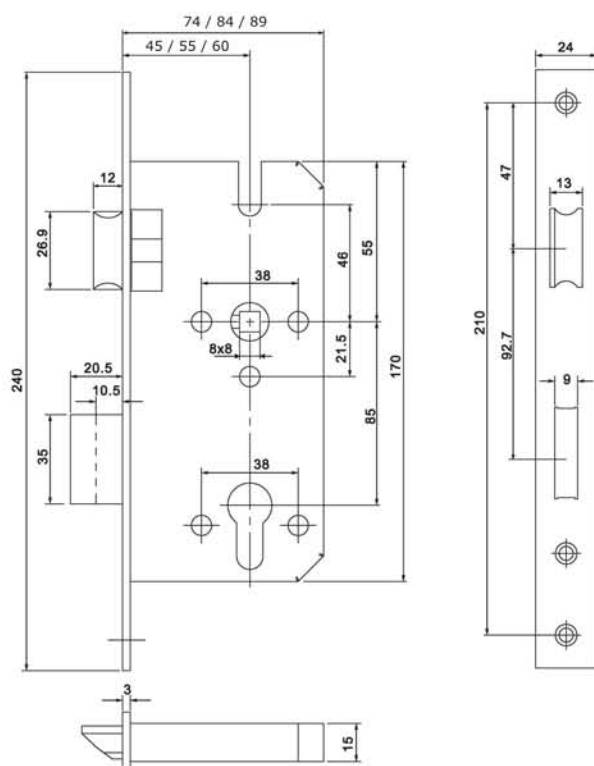


**DLA4585EP : 45mm backset**

**DLA5585EP : 55mm backset**

**DLA6085EP : 60mm backset**

**Finish: SSS, PSS, PB/PVD, SB/PVD, MAB, BL/PVD**

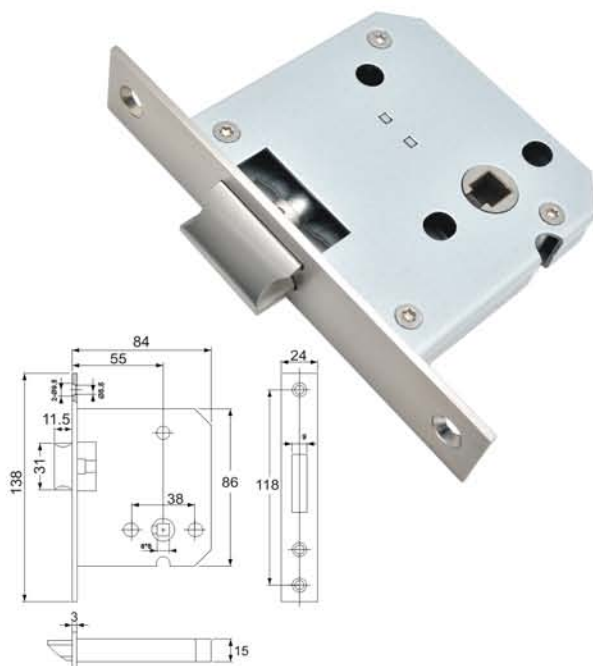
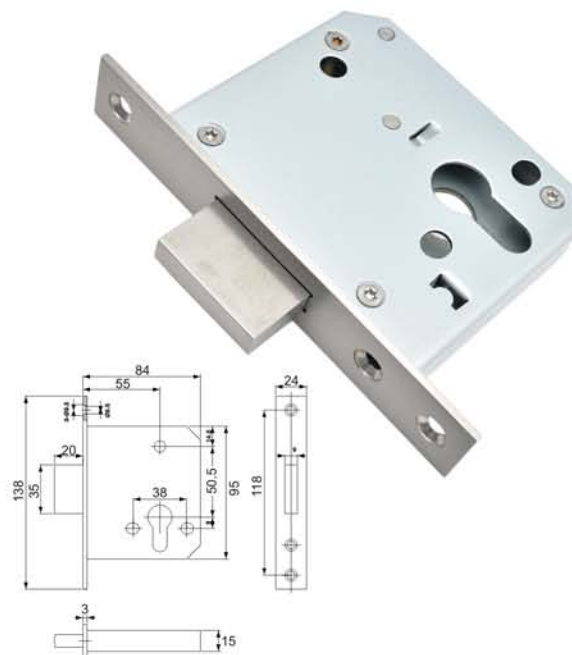
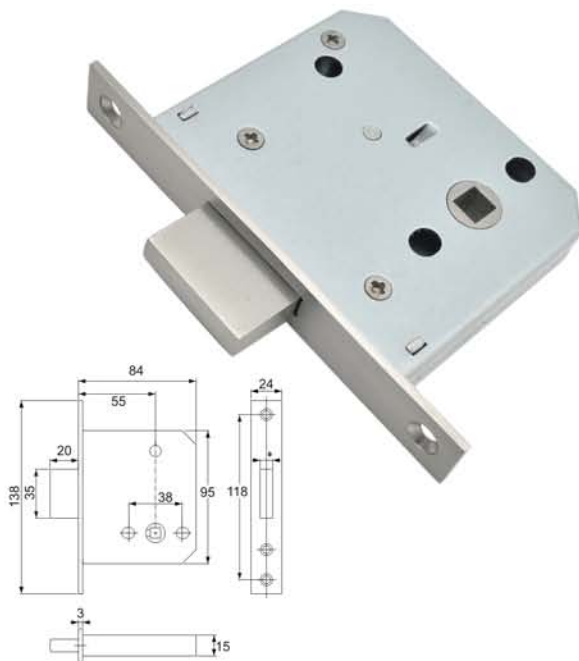
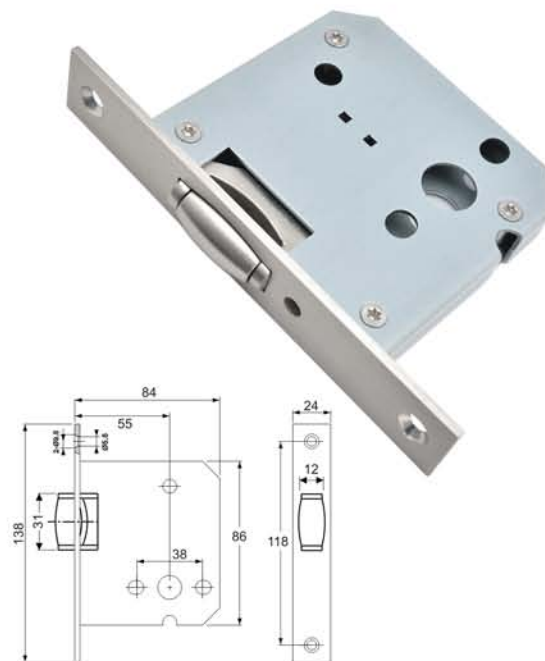


### Features

- 85mm centres
- 45/55/60mm backset
- SS 304 forend and strike plate
- SS 304 follower, latch and dead bolt
- Tested to Grade X: 200,000 test cycles
- Pierced to accept bolt through furniture and escutcheons at 38mm centres
- Suitable for doors where single action of escape is required. The door will be re-locked automatically when it closes and the security will be ensured
- Latchbolt operated by lever handle or key

### BS EN 12209 Classification

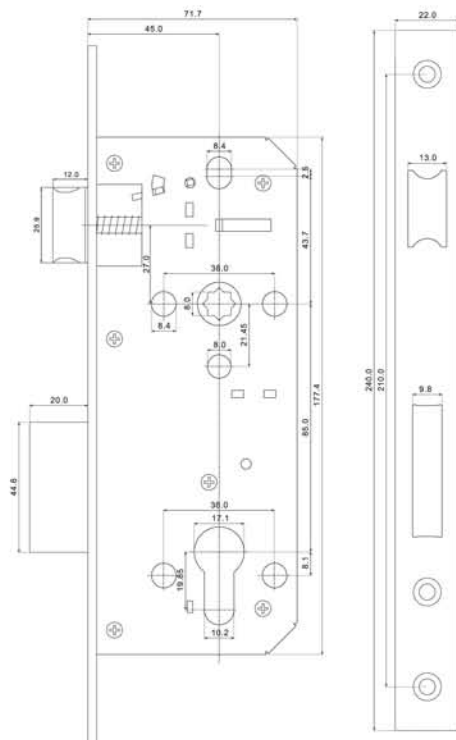
3	X	9	1	0	G	3	B	C	2	0
---	---	---	---	---	---	---	---	---	---	---

**FD0055L - DIN Flat Latch**

**FD0055EP - DIN Flat Deadlock**

**FD0055WC - WC Deadbolt**

**FD0055RL - DIN Roller Latch**

**Finish: SSS**



- **E485:** without cylinder
- **E485C:** with 65mm double cylinder
- **E485KT:** with 65mm key and turn cylinder
- **E485TE:** with 65mm bathroom cylinder

**Finish: SSS, MAB, PB**



### Features

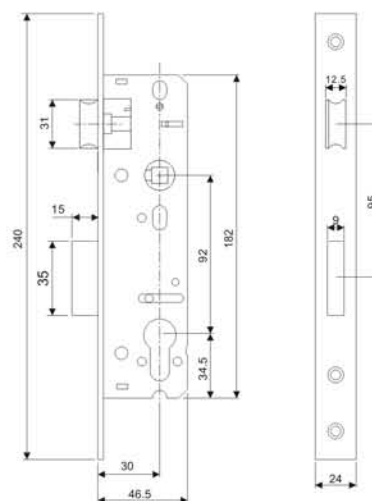
- 45mm backset, 85mm centres.
- Key and handle operation from both sides of the door.
- Double throw deadbolt of 20mm projection.
- Brass latch and steel deadbolt
- 3mm steel forend strike plate.
- Solid brass body cylinder.
- Supplied with 3 keys.
- Easy reversible latch bolt.



**NSL9230EP : 30mm backset**

### Features

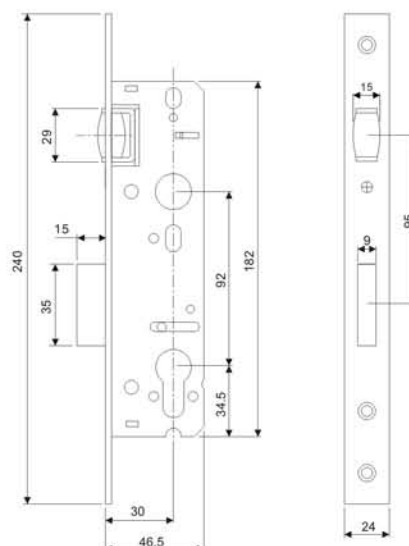
- 30mm backset
- Stainless steel forend and strike plate
- SS 304 latch bolt
- BS EN12209 performance tested



**NRL9230EP : 30mm backset**

### Features

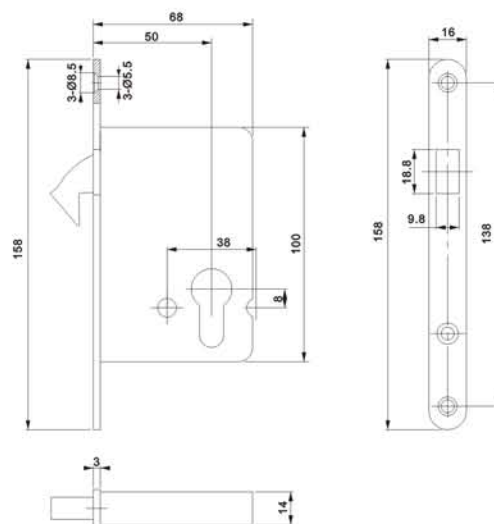
- 30mm backset
- Stainless steel forend and strike plate
- SS 304 roller bolt
- BS EN12209 performance tested



Finish: SSS, PSS, PB/PVD, MAB



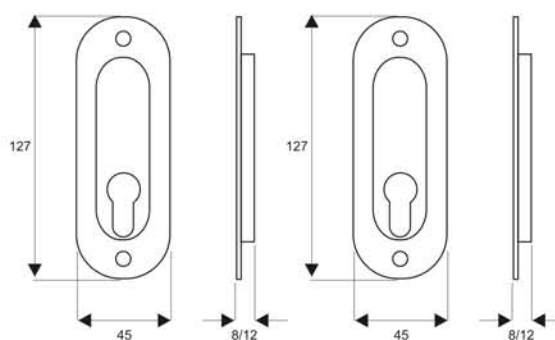



**Features**

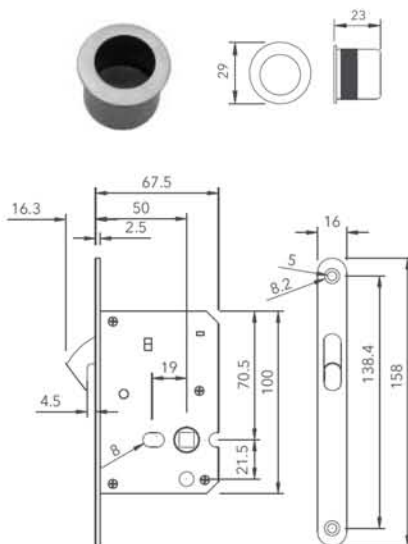
- 50mm backset
- Stainless steel forend and strike plate
- SS 304 latch bolt

**HL0050EP : 50mm backset**

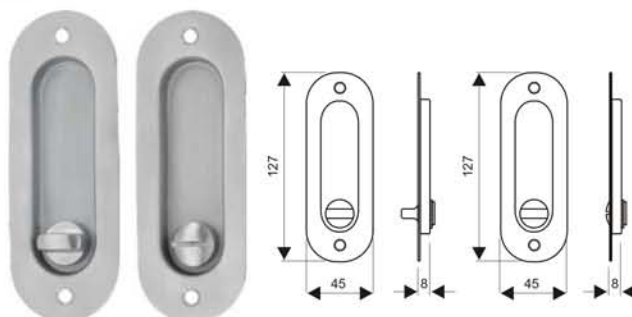
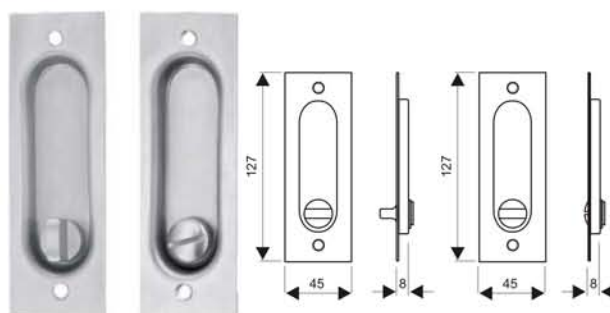
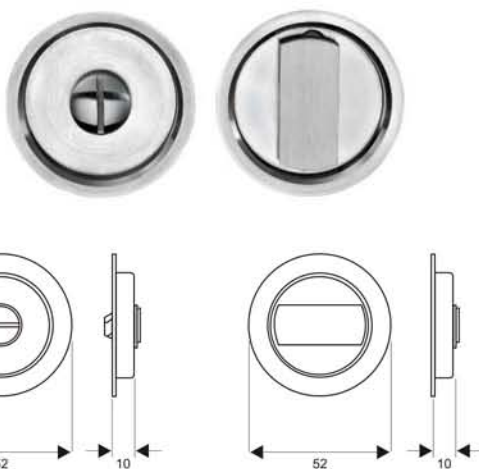
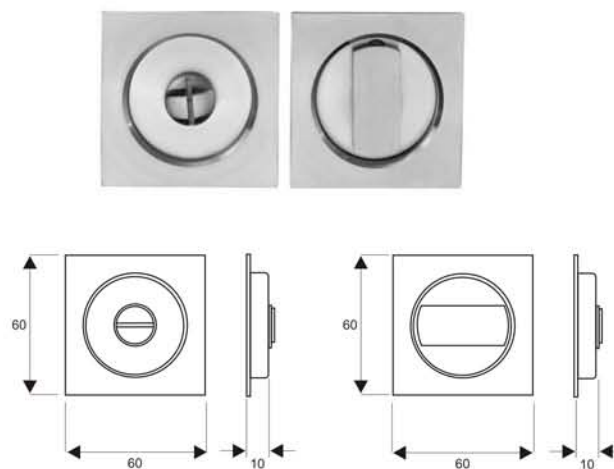
**FPSL1000 - EURO PROFILE FLUSH PULL**



**Finish: SSS, PSS, PB/PVD, MAB, BL/PVD**

**HL0050WC : 50mm backset**

**Features**

- 50mm backset
- Supplied with Door Edge Pull
- Various designs of flush pulls with turn and release available


**KIT - 1**

**KIT - 2**

**KIT - 3**

**KIT - 4**


**Finish: SSS, PSS, SB, MAB, MBL**

**WCD0025 - WC Deadbolt**

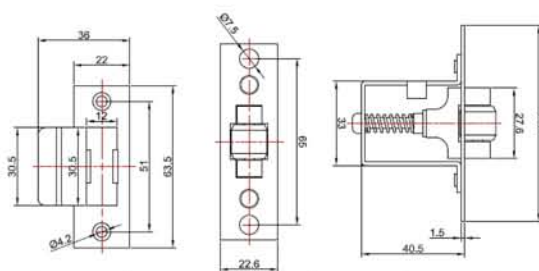

Finish: SSS

- Follower 8mm


**ARL452 - Heavy Duty Roller Latch**



Finish: SSS

- Roller latch not lockable
- 22mm forend width for flush doors



**DSB460 - Security Bolt**


Finish: SSS

- Supplied with one key
- Security bolt key available separately


**EBC3995 - Converter**


- Supplied to change europrofile to WC





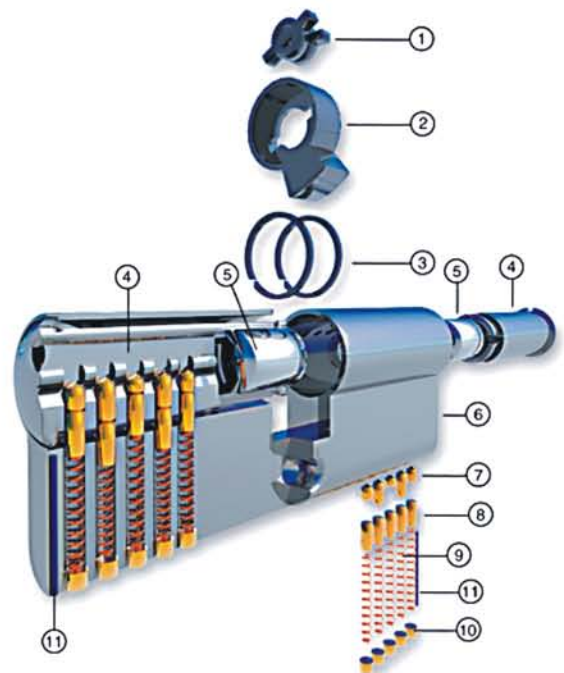
The EuroArt Pinning Centre is staffed by factory trained technicians and is equipped with the latest computerised software and key cutting machinery.

## Features

- BSEN 1303-2005 performance tested
- Quality solid brass body and plug
- 30 degree offset cam inhibits knock through
- Anti pick drivers
- Anti drill pins
- Anti pick key profile
- Large range of key combinations
- Cylinders available in a variety of finishes



- |                                    |                    |
|------------------------------------|--------------------|
| 1- Clutch                          | 7- Key Pins        |
| 2- Cam                             | 8- Middle Pins     |
| 3- Clip Rings                      | 9- Springs         |
| 4- Barrel                          | 10- Closing Pins   |
| 5- Spacer<br>(long cylinders only) | 11- Anti-drill Pin |
| 6- Housing                         |                    |



SN



MAB



PC



SB



PB



MBL

## Product Range

The EuroArt range of euro profile cylinders is made up of three main categories or levels:

- CYP Patent Protected Series: 6 Pin Cylinder with key control & suitable for large scale master key development..
- CYX flagship series : 10 pin high security with two line pins. This is the flagship of EuroArt cylinder range offering the advance V-Shaped flat key profile section, and doubling the pins where high security is essential.
- CYS Supreme series : 6 pin high security with dimple keys.
- CYD architectural series : 6 pin high security cylinders with 4 anti-drill pins.
- CYC contract series : 6 pin economy cylinders.



## CYP Series



## Applications

With strict control over key duplication and complex master keying options, CYP cylinders are ideally suited to use in medium to large buildings in the health and education sectors for example.



CYP is a range of master key cylinders ideal for use where high security and complex master keying are paramount. A long life patent to 2032 ensures maximum protection to prevent illegal key duplication. CYP contains a multi-profile key family and a complete range of cylinder types and sizes ensuring that CYP can cater for the very largest and complex of master key systems.

## Features

- Drill protection in cylinder barrel and body.
- Anti Pick, Anti Drill and Anti-Bump.
- Steel barrel and body pins.
- High quality nickel silver keys.
- Multi profile key family c/w common key and barrel profiles.
- Key blanks are not available - held securely at EuroArt.
- Multiple body and offset sizes available.
- CEN3, CEN4, CEN5 & CEN6 Padlock options.
- Construction keying.
- Internal clutch function.
- Split finish body options.
- Classroom function.

- Large complex keying capabilities.
- 36000+ differs under master key.
- Traditional and key control master key systems.



**Finish: SN, MAB, PC, SB, PB, MBL**

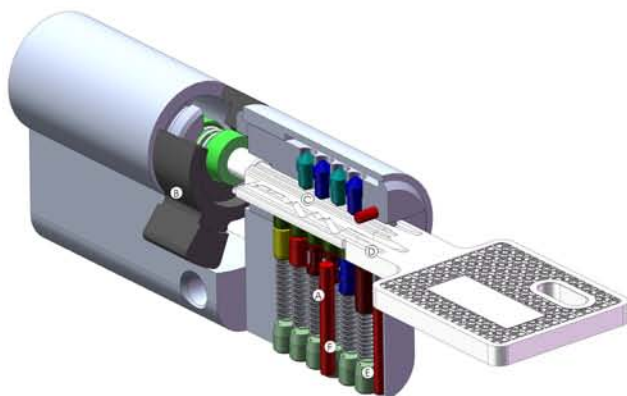
## BS EN 1303 Classification

1	6	0	B	0	C	6	C/D
---	---	---	---	---	---	---	-----

**CYX Series**

Ref. No.	Size
----------	------

- CYX260 : 60mm Double Cylinder
- CYX270 : 70mm Double Cylinder
- CYX280 : 80mm Double Cylinder
- CYX290 : 90mm Double Cylinder
- CYX360 : 60mm Key & Turn Cylinder
- CYX370 : 70mm Key & Turn Cylinder
- CYX380 : 80mm Key & Turn Cylinder
- CYX390 : 90mm Key & Turn Cylinder
- CYX145 : 45mm Single Cylinder


**Double entry function**

EuroArt CYX series can be unlocked from one side of the door even if a key is inserted on the other side

- Ⓐ **Hardened steel pin tumblers**  
Superior quality material increasing the life of locking system.
- Ⓑ **Locking Cam**  
Correct key will open the lock
- Ⓒ **Hardened steel core pins, chemically nickel plated**  
Protection against methods of manipulation
- Ⓓ **Revision pins**  
Control points for key authorisation
- Ⓔ **Springs**  
Element in the pin tumblers designed to move the pins into the correct position
- Ⓕ **Body drilling protection rod**  
Element in the pin tumblers designed to move the pins into the correct position

**Features**

- Durable, Reliable and Smooth operation, resistant to both dirt and freezing.
- No key-wear: virtually no bent, broken or worn keys.
- The key control system is designed to maintain the integrity of the key control program while allowing the provision of local support and keys
- Brass pins with special shape (Anti drilling, Anti picking and Anti bumping protection).
- Supplied with five 3mm keys

**Finish: SN, MAB, PC, SB, PB, MBL**

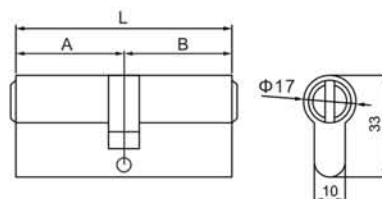


**CYS Series**

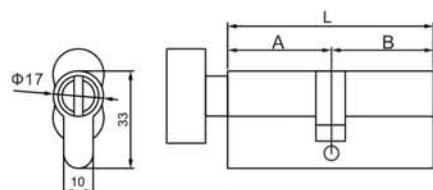
- Solid brass body
- Top pins made of solid brass
- Key manufactured from cupronickel
- Tested to 100,000 cycles
- Supplied with SS 304 bolt
- Keyed Alike suites available
- Approx 1500 differs available for a straight MK suite with no sub suites
- Full records kept for replacements and future extensions
- Supplied with five 2.8mm dimple keys

**Double Cylinder**



Ref. No.	Size
• CYS260	: 60mm
• CYS270	: 70mm
• CYS280	: 80mm
• CYS290	: 90mm


**Key and Turn Cylinder**


Ref. No.	Size
• CYS360	: 60mm
• CYS370	: 70mm
• CYS380	: 80mm
• CYS390	: 90mm


**Single Cylinder**


Ref. No.	Size
• CYS145	: 45mm



Finish: SN, MAB, PC, SB, PB, MBL

**BS EN 1303 Classification**

1	6	0	B	0	C	4	0
---	---	---	---	---	---	---	---

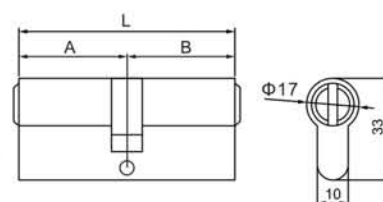


**CYD Series**

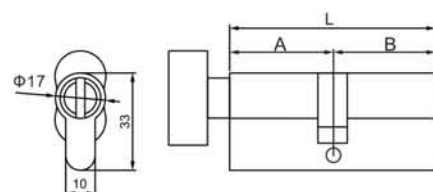
- Solid brass body
- Top pins made of solid brass
- Key manufactured from cupronickel
- Each side 4 anti drill pins
- Tested to 100,000 cycles
- Supplied with SS 304 bolt
- Keyed Alike suites available
- Bespoke master keyed systems assembled in-house at EuroArt (UK) Ltd.
- Approx 1000 differs available for a straight MK suite with no sub suites
- Full records kept for replacements and future extensions
- Supplied with three 2.2mm keys

**Double Cylinder**



Ref. No.	Size
• CYD260	: 60mm
• CYD270	: 70mm
• CYD280	: 80mm
• CYD290	: 90mm
• CYD2100	: 100mm


**Key and Turn Cylinder**


Ref. No.	Size
• CYD360	: 60mm
• CYD370	: 70mm
• CYD380	: 80mm
• CYD390	: 90mm


**Single Cylinder**


Ref. No.	Size
• CYD145	: 45mm
• CYD150	: 50mm



Finish: SN, MAB, PC, SB, PB, MBL

**BS EN 1303 Classification**

1	6	0	B	0	C	4	0
---	---	---	---	---	---	---	---

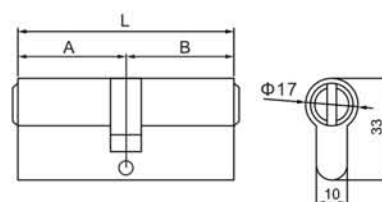


**CYC Series**

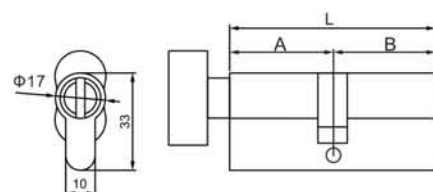
- Solid brass body
- Top and bottom pins made of solid brass
- Key manufactured from brass
- Supplied with three 2.2mm dimple keys

**Double Cylinder**



Ref. No.	Size
• CYC265	: 65mm
• CYC275	: 75mm
• CYC285	: 85mm


**Key and Turn Cylinder**


Ref. No.	Size
• CYC365	: 65mm
• CYC375	: 75mm
• CYC385	: 85mm


**Single Cylinder**


Ref. No.	Size
• CYC145	: 45mm



**Finish: SN, MAB, PC, SB, PB, MBL**

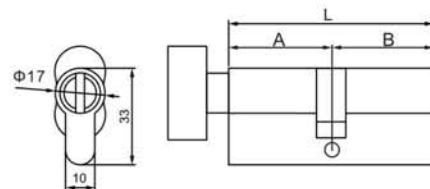
**BS EN 1303 Classification**

1	6	0	B	0	C	4	0
---	---	---	---	---	---	---	---

**Euro Bathroom Cylinder & Turn**

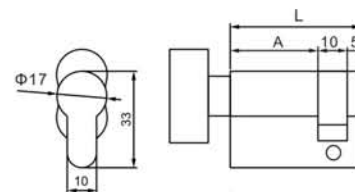

Ref. No.	Size
● CYC465	: 65mm
● CYD470	: 70mm
● CYD480	: 80mm
● CYD490	: 90mm

- Solid brass body
- Tested to 100,000 cycles
- Supplied with SS 304 bolt


**Euro Single Thumbturn Cylinder**


Ref. No.	Size
● CYD545	: 45mm

- Solid brass body
- Tested to 100,000 cycles
- Supplied with SS 304 bolt


**Cylinder Knobs**


Ref. No.
● CK A



Ref. No.
● CK B

Finish: SN, MAB, PC, SB, PB, MBL

**Key Blanks & Master Keys**


Ref. No.

- KBX : Key blank for CYX series
- MKX : Master key for CYX series



Ref. No.

- KBS : Key blank for CYS series
- MKS : Master key for CYS series



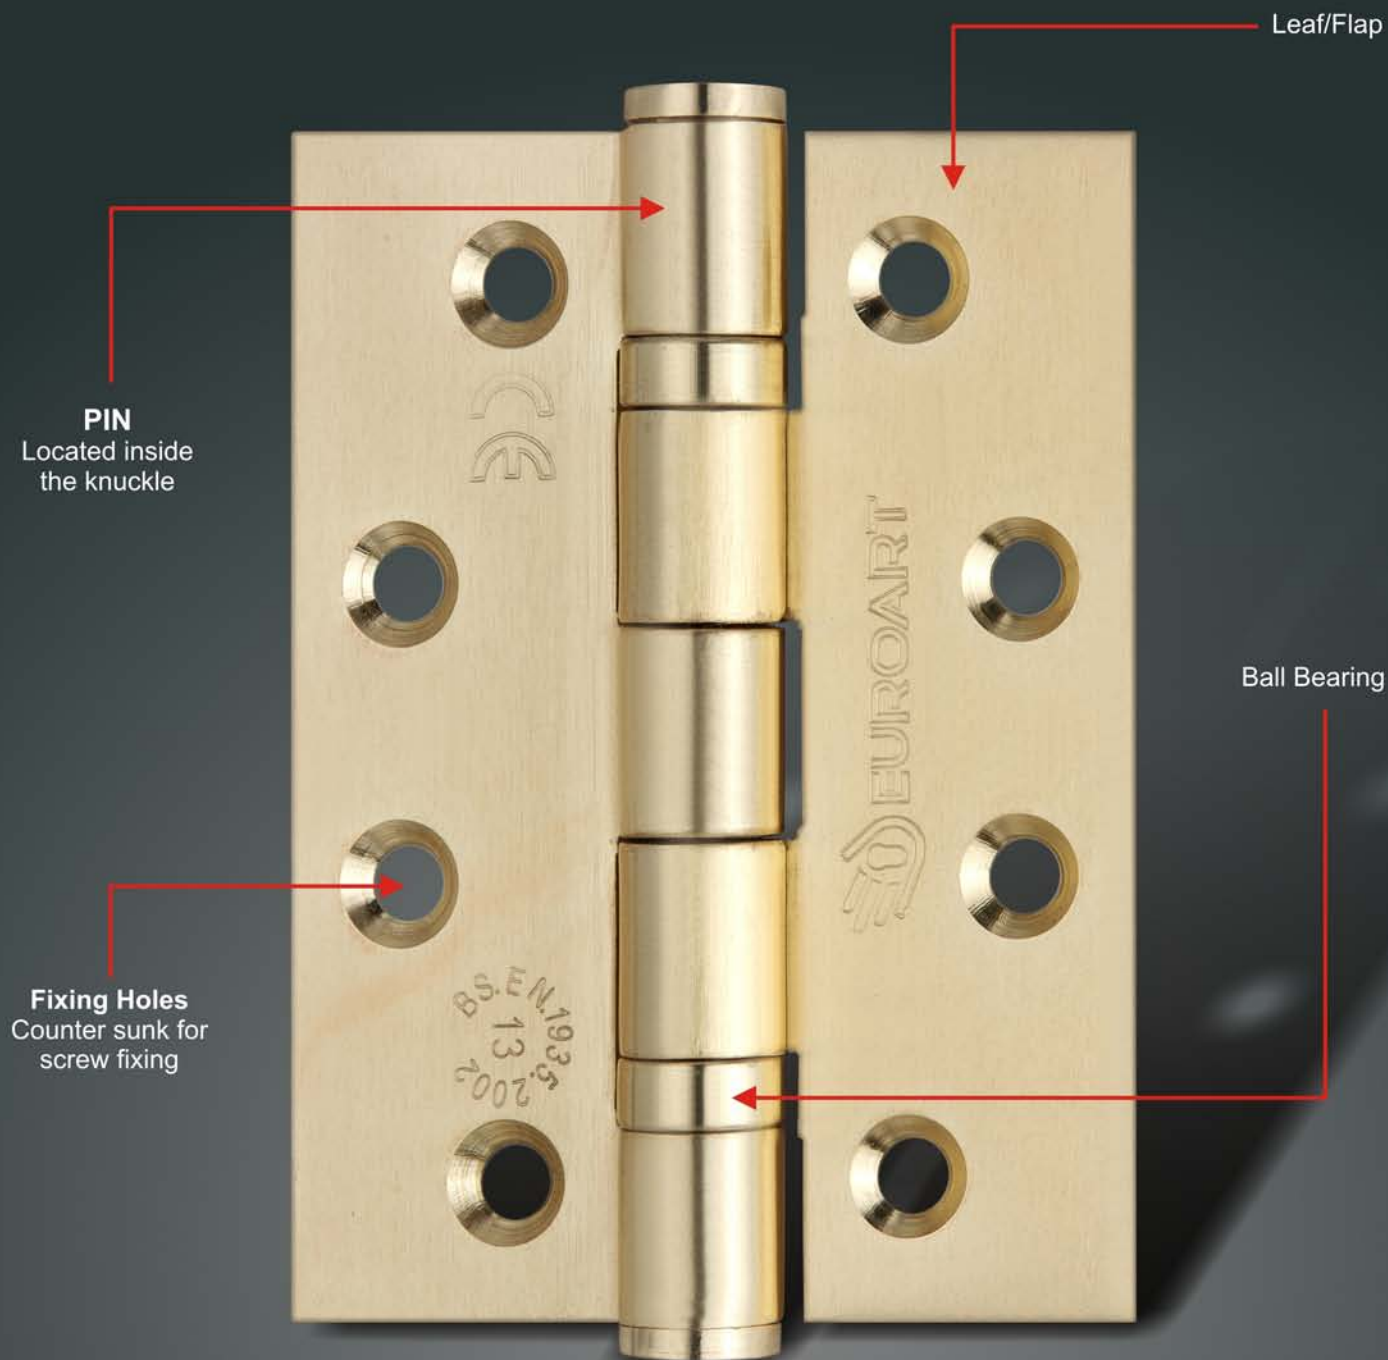
Ref. No.

- KBD : Key blank for CYD series
- MKD : Master key for CYD series



Ref. No.

- KBC : Key blank for CYC series
- MKC : Master key for CYC series



Butt hinge are the most commonly applied door hinge, and are available in a range of materials and construction.

A five knuckle hinge has a flap with three knuckles attached to the frame and flap with two knuckles attached to the door. Similarly, a three knuckle hinge has the flap with two knuckles attached to the frame with a single knuckle flap attached to the door.

EuroArt hinges, where specified correctly to the recommendation of BS EN 1935, are capable of withstanding a severe degree of use. Most are particularly suitable for use with door closers and will help to ensure the smooth operation of the door.



## Technical considerations

### Door weight, door size, location & intended use

To specify the correct hinge there are a number of factors that need to be taken into consideration. The majority of situations are straightforward and present few problems, however it is important that specifiers recognise where special care is required to ensure long and trouble free operation. Because of the wide variety of circumstances that exist it is impossible to be prescriptive, however the following is intended to draw attention to some of the potential problem areas and explain some of the principles involved.

#### Factors to consider when specifying hinges

- Is it a fire, smoke or emergency escape door?
- How heavy is the door and what are the door dimensions (height, width and thickness)?
- What is the door's construction and are there any unusual features that could affect the hinges?
- Where is the door situated e.g. internal or external; is it near the coast or in a swimming pool?
- What level of use/abuse will the door be subject to e.g. office, hospital or school corridor?
- What other items of hardware are to be fitted, that may affect the hinge performance, typically door closers or door stops?
- Any other unusual features involved eg. door has radius top or the door is a bifold.

### Forces operating on a door

There are two main forces that the hinge has to cope with. The vertical load; and, as hinged doors are side-hung, the horizontal or lateral load.

The vertical load is a direct result of the gross door weight.

The horizontal load is created by:

- The door weight
- The door height to width ratio
- Where the hinges are positioned.

The wider the door is in relation to its height, the greater the side load that the hinges and their fixings have to support.

### Locating the hinges

It is usual for at least three hinges to be fitted on doors; their positioning is determined by the size, weight and construction of the door and its intended use.

### General guidelines

- Top and bottom hinges must be as far apart as reasonable, to maximise their ability to cope with side load.
- Consider any other factors that will increase the loadings of hinges and their fixings.
- Additional hinges are needed for tall doors, to prevent warping (doors taller than 2200mm should be fitted with four hinges).

Fig. 1

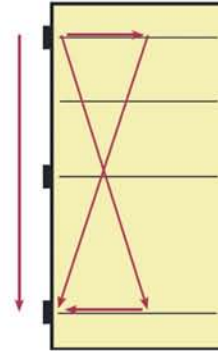
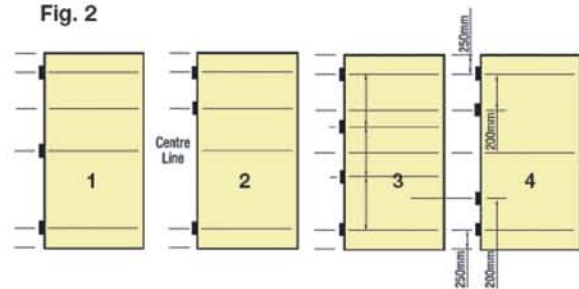


Fig. 2



### Examples of typical hinge positions (Fig. 2)

1 Standard hinge positioning.

2 Alternative standard hinge position for improved load carrying and provides additional support for a door closer.

3 For taller and/or heavier doors and/or where a door requires additional support due to its level of use/abuse (eg. school or hospital)

4 For heavy doors or doors with a increased side load (i.e. wide doors).




**Finishes:**

**SSS**

**PSS**

**PB/PVD**

**SB/PVD**

**BL/PVD**

**MAB**

**SCG/PVD**

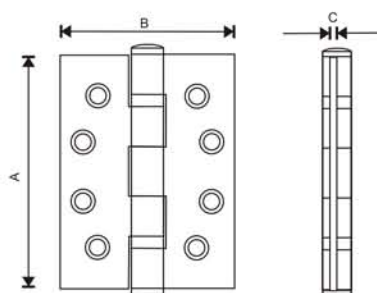
**GM/PVD**

Other finishes are available on order

Ref. No.	Size (A x B x C)
● HINBB433	: 102 x 76 x 3mm
● HINBB43.53	: 102 x 89 x 3mm
● HINBB443	: 102x 102x 3mm
● HINBB533	: 127 x 76 x 3mm
● HINBB4.543.4	: 114x102x3.4mm
● HINBB4.54.53.4	: 114x114x3.4mm

**Features**

- Suitable for 120min timber and 240min metal fire/smoke resistant doors
- Double ball bearing, five knuckle hinge
- Successfully tested for conformity to all the requirements of BS EN1935
- Load bearing capacity up to 120kg
- Available square or radius
- Tested to Grade 7: 200,000 cycles
- Pre-cut intumescent hinge pads available


**BS EN 1935 Classification**

4	7	6	1	1	4	0	13
---	---	---	---	---	---	---	----


**Features**

- Double ball bearing, five knuckle hinge
- Successfully tested for conformity to all the requirements of BS EN1935
- Load bearing capacity up to 120kg
- Tested to over 200,000 cycles
- Suitable for fire/smoke resistant doors



Ref. No.	Size
• HINBB53.53	: 127 x 89 x 3mm
• HINBB643	: 153x 102x 3mm
• HINBB543.5	: 127x102x3.5mm
• HIN4B644	: 153 x102 x4mm
• HIN4B6.54.54	: 166 x114 x4mm
• HIN4B844	: 204 x102 x4mm


**Features**

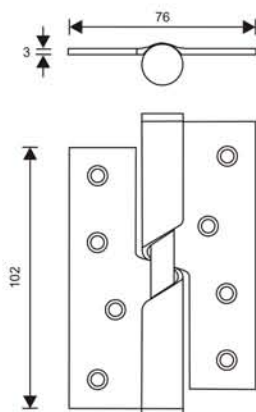
- Double ball bearing, five knuckle hinge
- Load bearing capacity up to 120kg
- Tested to over 200,000 cycles

Ref. No.	Size
• BBH171	: 102 x 76 x 3mm
• BBH181	: 102 x 89 x 3mm
• BBH191	: 102x 102x 3mm

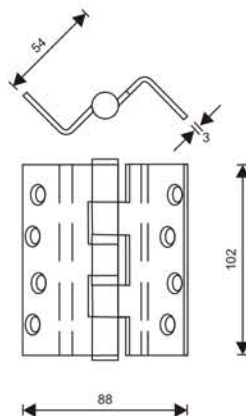
**Finishes: SSS, PSS, PB/PVD, BL/PVD, SB/PVD, MAB**

**Parliament Hinge**


Ref. No.	Size(A x B x C)
● HINPA44	: 100 x 100 x 3.5mm
● HINPA45	: 125 x 100 x 3.5mm
● HINPA46	: 150 x 100 x 3.5mm

**Rising & Falling Hinge**


Ref. No.	Size
● HINRR433	: 102 x 76 x 3mm - Right hand rising
● HINRL433	: 102 x 76 x 3mm - Left hand rising

**Rebated Door Hinge**



Ref. No.	Size
● HINRBB4883	: 102 x 88 x 3mm

**Finishes: SSS, PSS, PB/PVD, BL/PVD, SB/PVD, MAB**




### Single Action Spring Hinge


Recommended for standard weight, medium frequency doors in place for door closers in apartments, hotels, office buildings, etc.



HINSA11



HINSA12

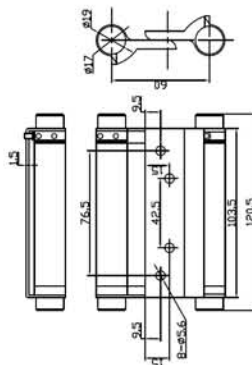


HINSA13

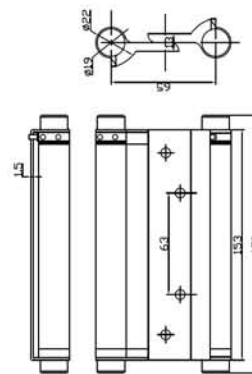
This non-handed spring hinge series is adjustable and tension can be added or reduced by means of hex key that is supplied with the product

Ref. No.	Size	Load Capacity
● HINSA11	: 102x76x3mm	60kg
● HINSA12	: 102x102x3mm	70kg
● HINSA13	: 114x102x3.4mm	85kg

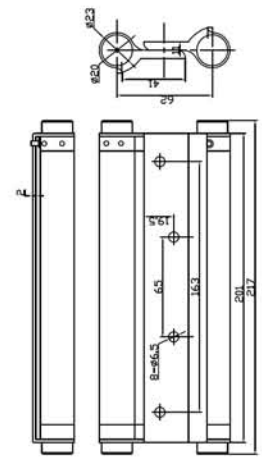
### Double Action Spring Hinge



HINDA4



HINDA6



HINDA8

Ref. No.	Size	Load Capacity	Door Width(min)
● HINDA4	: 100mm	35kg	800mm
● HINDA6	: 150mm	50kg	850mm
● HINDA8	: 200mm	60kg	900mm

**Finishes: SSS**






### Finish:



MAB



PB/PVD

### Features

- Suitable for 120min timber and 240min metal fire/smoke resistant doors
- Double ball bearing, five knuckle hinge
- Successfully tested for conformity to all the requirements of BS EN1935
- Load bearing capacity up to 120kg
- Available square or radius
- Tested to Grade 7: 200,000 cycles
- Pre-cut intumescent hinge pads available

Ref. No.	Size
• HINBB433DF	: 102 x 76 x 3mm
• HINBB43.53DF	: 102 x 89 x 3mm
• HINBB443DF	: 102x 102x 3mm
• HINBB533DF	: 127 x 76 x 3mm
• HINBB53.53DF	: 127 x 89 x 3mm
• HINBB643DF	: 153x 102x 3mm

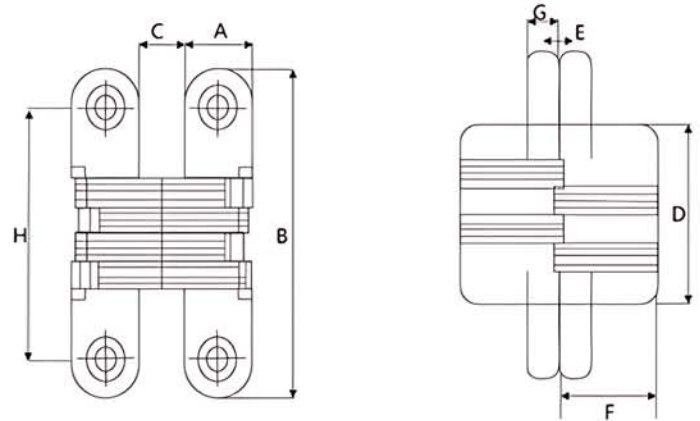
Finishes: SSS, PSS, PB/PVD, BL/PVD, SB/PVD, MAB





### Features

- Zinc alloy body, hardened steel pins
- Totally invisible when door is closed
- Non-handed
- Suitable for timber and metal doors



Product Code	Size Thickness	Min. door Thickness	Weight Rated	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)
BH1345	13x45mm	19mm	10 Kg.	13	45	9	19	0.8	18	5	30.5
BH1360	13x60mm	19mm	14 Kg.	13	60	9	30.5	0.8	18	6	47
BH1670	16x70mm	22mm	25 Kg.	16	70	11	34	0.8	22.5	7.4	51
BH1995	19x95mm	28mm	35 Kg.	19	95	13	52.5	1.2	27	9	73
BH25117	25x117mm	35mm	45 Kg.	25	118	18	61.5	1	36.5	11.3	90.5
BH28117	28x117mm	41mm	55 Kg.	28	118	22	65.3	1.4	41	9.5	93
BH33139	33x139mm	47mm	70 Kg.	35	139.5	27.5	74.5	1.6	51	11.5	113.5



SN



MAB




CP



PB



**3D**  
**Concealed**  
**Hinges**

**ED360**

**Features:**

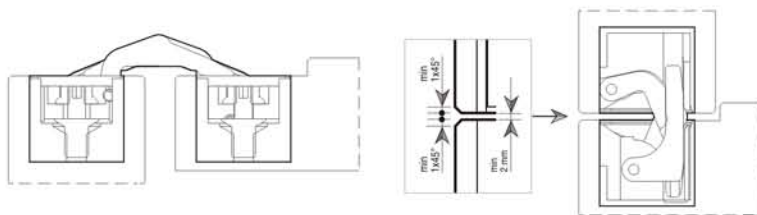
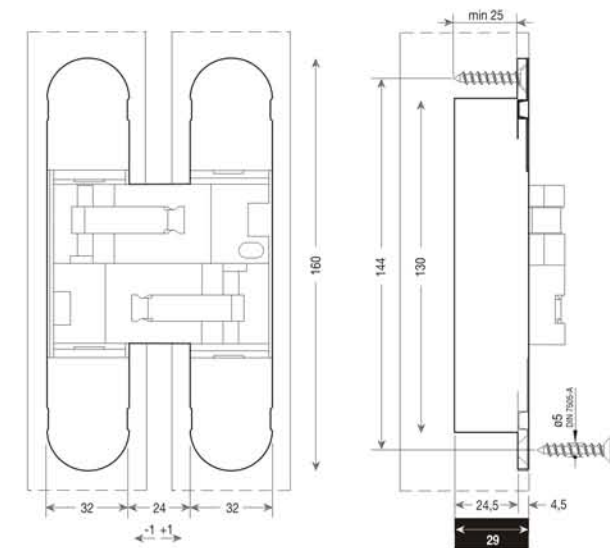
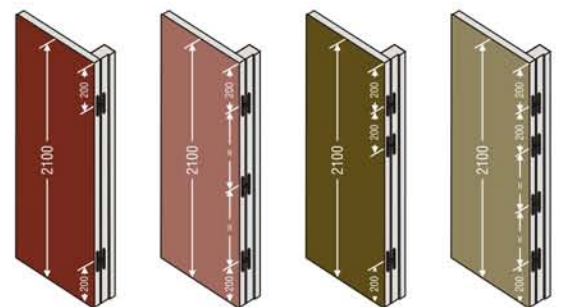
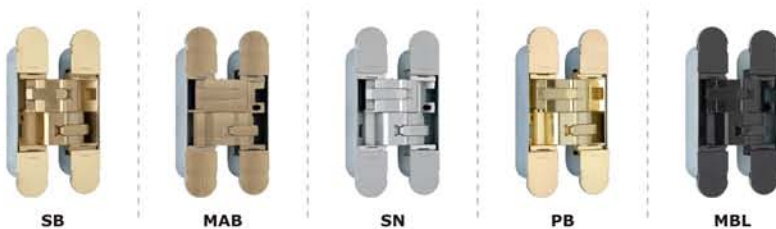
- Available in 10 different finishes.
- Compatible for door thickness minimum 38mm.
- Hinge total height 160mm and Depth 29mm.
- Area of application : residential, commercial entrance door & marine use.
- 3D adjusting system – Horizontal, vertical, and depth adjustment.
- Easy installation and slot symmetry.
- The new smart design makes the operation resistant to rusting and oxidation with the help of steel caps.
- Restructuring of the joints for smooth and effortless movement with long-lasting durability.

**Load capacity chart**
**2 HINGES LOAD CAPACITY CHART**

Door Height mm	2200	2100	2000	1900								
	80	80	80	80	78	66	59	54				
	80	80	80	80	72	62	56	52				
	80	80	80	80	66	58	53	49				
	80	80	73	62	62	55	51	47				
					700	800	900	1000	1100	1200	1300	
Door width mm												

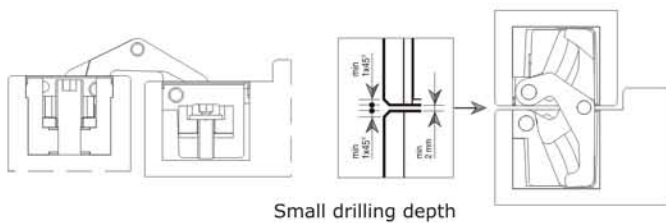
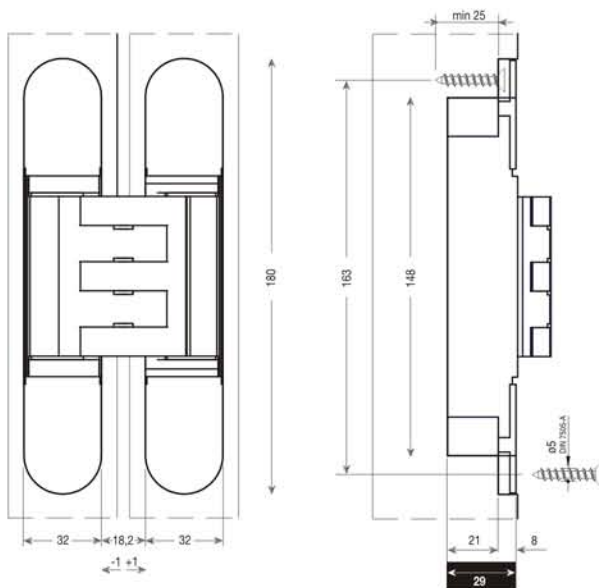

**3 HINGES LOAD CAPACITY CHART**

Door Height mm	3000	120	120	120	120	120	120	120	120	120	120	120	4 HINGES SUGGESTED
	2900	120	120	120	120	120	120	120	120	120	120	120	
	2800	120	120	120	120	120	120	120	120	120	120	112	
	2700	120	120	120	120	120	120	120	120	120	105		
	2600	120	120	120	120	120	120	120	114	98			
	2500	120	120	120	120	120	120	105	92				
	2400	120	120	120	120	120	115	98	87				
	2300	120	120	120	120	106	92	83					
	2200	120	120	120	117	98	86	78					
	2100	120	120	120	107	91	82	75					
	2000	120	120	120	98	85	77	71					
		700	800	900	1000	1100	1200	1300					
Door width mm													


**Small drilling depth**


- 2 - Hinges
- 3 - Asymmetrical hinges
- 3 - Symmetrical hinges
- 4 - Hinges



**ED380**

**Features:**

- Available in 4 different finishes.
- Compatible for door thickness minimum 38mm.
- Load bearing capacity: 150kg.
- 3D adjusting system – Horizontal, vertical, and depth adjustment.
- Symmetric & only 29mm deep.

**Load capacity chart**
**2 HINGES LOAD CAPACITY CHART**

Door Height mm	2200	2100	2000	1900	700	800	900	1000	1100	1200	1300
	120	120	120	120	120	120	120	118	100	89	81
	120	120	120	120	108	94	84	78			
	120	120	120	100	88	80	74				
	120	120	109	93	83	76	71				

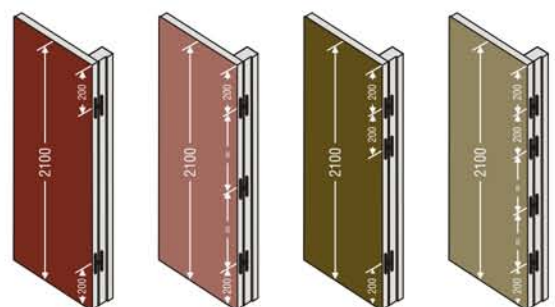
Door width mm

**3 HINGES LOAD CAPACITY CHART**


Door Height mm	3000	2900	2800	2700	2600	2500	2400	2300	2200	2100	2000	700	800	900	1000	1100	1200	1300
	135	135	135	135	135	135	135	135	135	135	135	135	135	135	135	135	135	135
	135	135	135	135	135	135	135	135	135	135	135	126						
	135	135	135	135	135	135	135	135	135	135	135	118						
	135	135	135	135	135	135	135	135	135	135	135	128	110					
	135	135	135	135	135	135	135	135	135	135	135	119	104					
	135	135	135	135	135	135	135	135	135	135	135	130	110	98				
	135	135	135	135	135	135	135	135	135	135	135	119	103	93				
	135	135	135	135	135	135	135	135	135	135	135	132	110	97	88			
	135	135	135	135	135	135	135	135	135	135	135	120	103	92	84			
	135	135	135	135	135	135	135	135	135	135	135	110	96	87	80			

Door width mm

4 HINGES  
SUGGESTED



- 2 - Hinges
- 3 - Asymmetrical hinges
- 3 - Symmetrical hinges
- 4 - Hinges

**ED430**

**Features:**

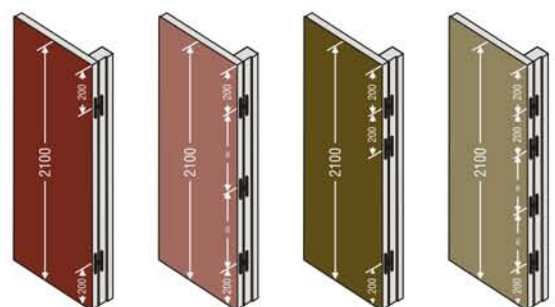

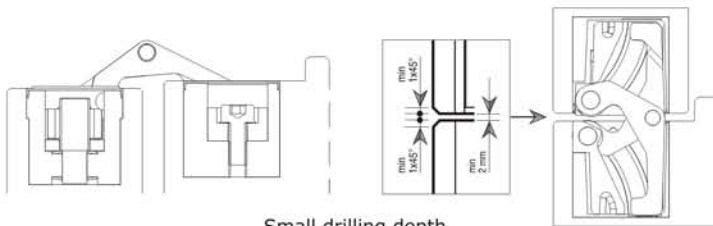
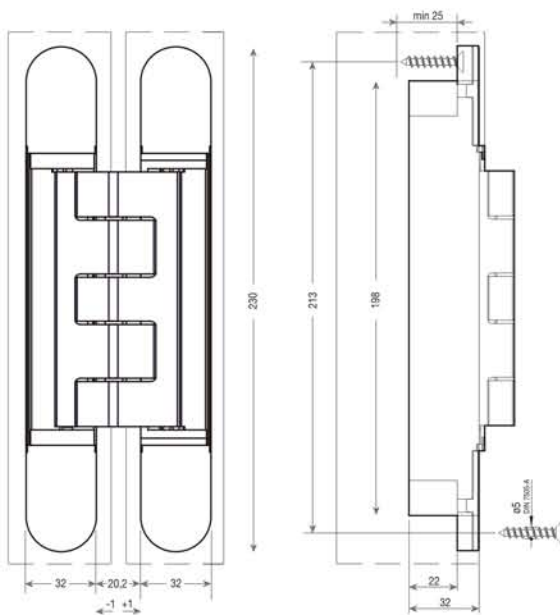
- Available in 4 different finishes.
- Compatible for door thickness minimum 38mm.
- Load bearing capacity: 250kg.
- 3D adjusting system – Horizontal, vertical, and depth adjustment.
- Symmetric & only 32mm deep.
- ED430W - Available for clad doors.

**Load capacity chart**
**2 HINGES LOAD CAPACITY CHART**

Door Height mm	2200	180	180	180	176	150	133	122
	2100	180	180	180	162	140	126	116
	2000	180	180	180	150	132	120	111
	1900	180	180	164	140	125	114	107
		700	800	900	1000	1100	1200	1300
<b>Door width mm</b>								


**3 HINGES LOAD CAPACITY CHART**

Door Height mm	3000	215	215	215	215	215	215	215	4 HINGES SUGGESTED
	2900	215	215	215	215	215	215	215	
	2800	215	215	215	215	215	215	201	
	2700	215	215	215	215	215	215	188	
	2600	215	215	215	215	215	204	176	
	2500	215	215	215	215	215	189	165	
	2400	215	215	215	215	207	176	156	
	2300	215	215	215	215	190	165	148	
	2200	215	215	215	210	176	155	141	
	2100	215	215	215	192	164	146	134	
2000	215	215	215	176	153	138	128		
		700	800	900	1000	1100	1200	1300	
Door width mm									

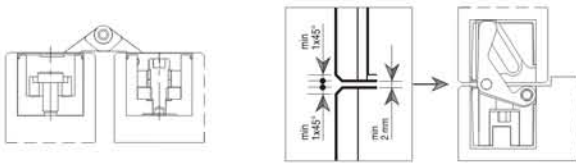
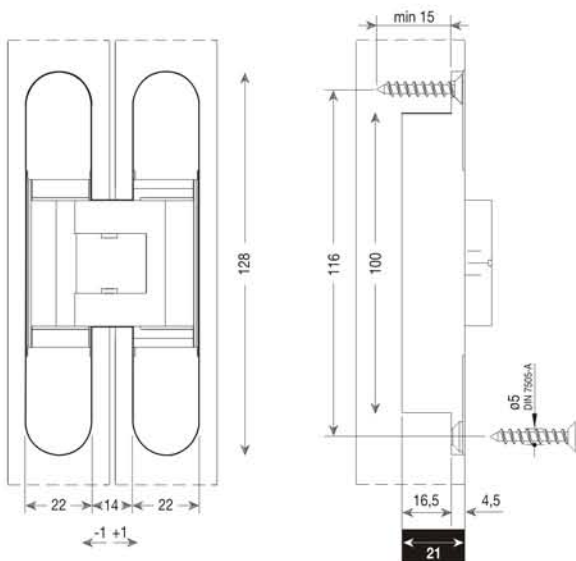


- 2 - Hinges
- 3 - Asymmetrical hinges
- 3 - Symmetrical hinges
- 4 - Hinges

## ED228



MAINTENANCE**FREE**



Small drilling depth



SB



**MAB**



**SN**



**WHT**



**MBL**

### Features:

- Available in 12 different finishes.
- Compatible for door thickness minimum 28mm.
- Load bearing capacity: 70kg.
- 3D adjusting system – Horizontal, vertical, and depth adjustment.
- Depth: 21mm.

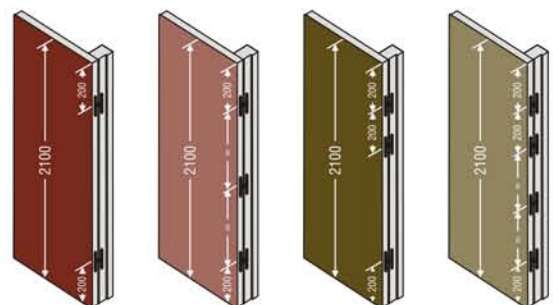
### Load capacity chart

## 2 HINGES LOAD CAPACITY CHART

Door Height mm	2200	50	50	50	49	41	37	34
	2100	50	50	50	45	39	35	32
	2000	50	50	50	41	36	33	31
	1900	50	50	45	38	34	32	29
		700	800	900	1000	1100	1200	1300
Door width mm								

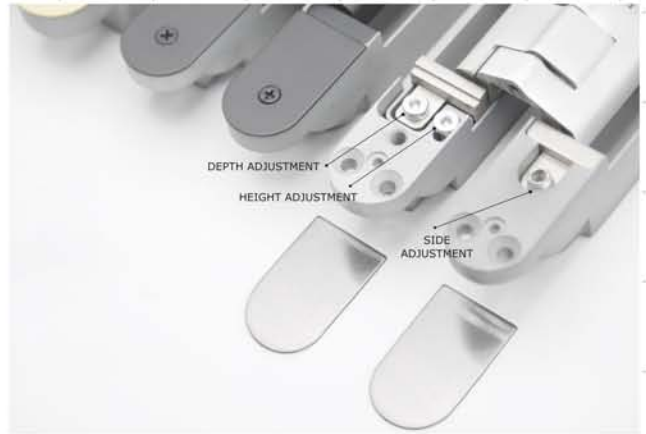

### 3 HINGES LOAD CAPACITY CHART

Door Height mm	Door width mm							4 HINGES SUGGESTED
	700	800	900	1000	1100	1200	1300	
3000	65	65	65	65	65	65	65	
2900	65	65	65	65	65	65	65	
2800	65	65	65	65	65	65	61	
2700	65	65	65	65	65	65	57	
2600	65	65	65	65	65	61	53	
2500	65	65	65	65	65	57	50	
2400	65	65	65	65	62	53	47	
2300	65	65	65	65	57	50	45	
2200	65	65	65	63	53	47	42	
2100	65	65	65	58	49	44	40	
2000	65	65	65	53	46	42	39	



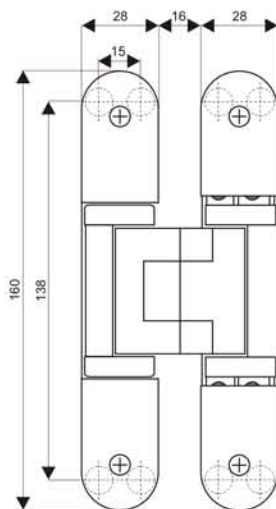
- 2 - Hinges
- 3 - Asymmetrical hinges
- 3 - Symmetrical hinges
- 4 - Hinges



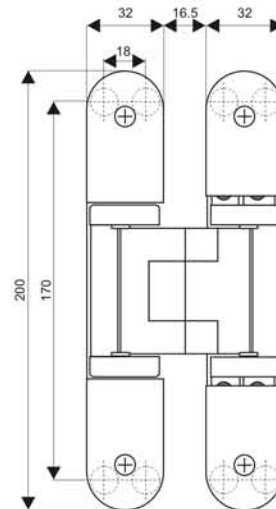
**3D160/3D200**

**Features**

- Completely concealed for unrebbated doors with timber, steel and aluminium frames
- Cycle tested: 200,000
- Right hand and left hand applicable
- Three-dimensionally adjustable
- Opening angle 180 degrees
- Pre-cut intumescent hinge pads available

Ref. No.	Size	Load Capacity
• 3D160	28 x 160mm	80kg.
	Minimum door thickness required: 36mm	
	2 Pcs. for door width upto 900mm	
	3 Pcs. for door width upto 1000mm	



Ref. No.	Size	Load Capacity
• 3D200	32 x 200mm	120kg.
	Minimum door thickness required: 40mm	
	2 Pcs. for door width upto 1000mm	
	3 Pcs. for door width upto 1150mm	


**SCG**

**SB**

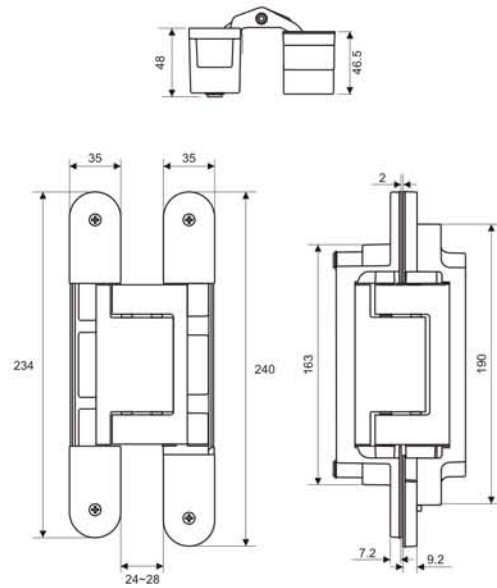
**MAB**

**SN**

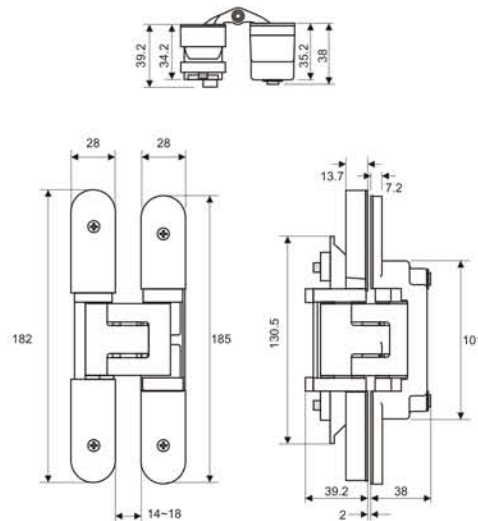
**PB**

**MBL**




**3D234**

**Features**

- Material: Solid stainless steel.
- Timber, steel or aluminium doors.
- Loading bearing capacity: 200kg.
- Min door thickness: 44mm
- Opening angle 180 degrees

**3D184**

**Features**

- Material: Solid stainless steel.
- Timber, steel or aluminium doors.
- Loading bearing capacity: 100kg.
- Min door thickness: 36mm
- Opening angle 180 degrees

Finish: SSS, PSS, SB, PB, MAB, MBL





## Architectural Range of Door Closers

Door controls are placed under more arduous conditions of use & abuse than nearly all other items of hardware. It is essential that their operation is smooth, efficient & reliable at all times, especially when used on fire resistant & smoke control doors.

EuroArt architectural range of door controls are produced to the highest standards of design & most have adjustable control features. This comprehensive range of door controls feature varying power sized units for many different door applications. They come with a choice of architectural covers which are available in plated or colour coated finishes.



# Door Closers

## Power Size

Door Closer Power Size	Recommended Max Door Width (mm)	Max Test Door Mass Kg
1	<750	20
2	850	40
3	950	60
4	1100	80
5	1250	100
6	1400	120
7	1600	160

- The power of a door closer should relate to the width and weight of the door onto which it is to be fitted. The chart opposite provides a guide to selecting the appropriate product.
- Closers are designed to specific strengths i.e. 'fixed' strength or variable strengths whereby the power is either 'adjustable' within the mechanism itself or 'selectable' via a template.
- When fitting a closer in a parallel arm installation (app. 66), it is usual to experience some power loss and a stronger unit may be needed. However, some EuroArt closers retain their strength regardless of application.
- Certain environmental factors could impact on the opening force of the door, e.g. wind pressures. If unusually windy or draughty conditions are expected, select the power size for the next door width.


## European Standards




Depending on their function, all EuroArt door closers are CE marked and conform to either BS EN 1154 Controlled Door Closing Devices or BS EN 1155 Electrically powered hold-open devices for swing doors. All products have been included in a successful fire test in accordance with BS EN 1634-1.

## Applications


**Fig 1 Application**




**Fig 61 Application**



**Fig 66 Application**




## Backcheck



Backcheck offers resistance to opening between 70° and 90° when the door is opened with excessive force. Useful in all situations. Helps prevent damage to building and door frames, particularly where opening is restricted. **NOTE :** Backcheck is not a substitute for door stops which should be fitted wherever possible.


## Delayed Action



Delayed Action slows down the closing speed of the door between approx 90° and 65°. The amount of delay can be adjusted and de-activated altogether. Ideally suited for applications, such as care homes, where people need a greater length of time to exit doorways.




# Door Closers



## Controlled Closing

All EuroArt door closers have an adjustment valve which allows the closing speed to be controlled. This is effective throughout the whole closing cycle except where delayed action or latch action are activated.



## Latch Action

Latch action provides for the adjustment of the last 10° (approx) of the closing cycle. This allows the closer to be adjusted to overcome a latch or intumescent seal.

## Slide Arm Application

Can be used where it is undesirable to have a projecting arm. Consists of a single arm connected to a channel mounted above the door. (Not suitable for doors with projecting architraves).

## Drop Plate

Allows a door closer to be fitted where the top rail of the door is too narrow to allow normal fitting. The drop plate is first attached to the door and then the closer attached to the drop plate.



## Concealed Cam Action Door Closers

Page no. 207 - 211

DC3024



DC8524



DC8024



DC8025BC



DC3036BC



## Concealed Door Closers

Page no. 212 - 214

DC7003



DC7004



DC7025



## Cam Action Door Closers

Page no. 215 - 216

DC9024



DC2024BC



## Heavy Duty Standard Arm Door Closer

Page no. 217 - 219

DC6026BC



DC6025BC



DC9016BC



## Standard Arm Door Closer

Page no. 220 - 223

DC5024



DC1003



DC1024



DC1503



## Door Closers with Sliding Arm & Channel

Page no. 224

DC5024/SAC



DC6025/SAC



DC6026/SAC



## 9000 Series E-mag Door Closer

Page no. 225

DC9870



## Floor Springs, Pivots & Accessories

Page no. 226 - 230

FS7524



FS9403



FS9516



1000/25F



2000/4F



AC10.01



AC10.02



AC10.06



AC10.07



SA.FS2004



SA.FS9516



AC10.08



## Door Coordinator & Overhead Door Stopper

Page no. 231 - 232

3700

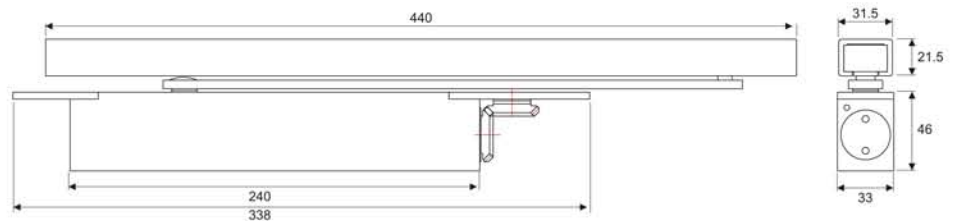


SMC3010



ODS4000 & ODS4005



**DC3024**

**Finish: SBP, MABP, MBL, SILVER**

### Product specification

Power size (adjustable by spring)

EN2	Yes
EN3	Yes
EN4	Yes
Mechanism	Cam action
Adjustable closing speed	Yes
Adjustable latch action	Yes
Maximum door width (mm)	1100
Maximum door weight (kg)	100
Minimum door thickness required (mm)	44
Opening angle	120°
LH and RH doors - universal application	Yes

Note: push or pull side of the door subject to rebate distances.

### Features

- Enhanced aesthetics - providing the ability to retain a clean, unhindered appearance to the door and interior
- Totally invisible when the door is closed. Guide rail only visible during opening moment
- Optimum protection against vandalism because of concealed installation
- Can be incorporated within the door pre-fabrication process, allowing complete installation in the factory
- Fully controlled, reliable closing with adjustable latch action
- Tested to Grade 8: 500,000 cycles.
- Hold open unit available

### BS EN 1154 Classification

3	8	2 4	1	1	4
---	---	--------	---	---	---

**DC8524**

**Finish: SBP, MABP, MBL, SILVER**

## Product specification

Power size (adjustable by spring)

EN2	Yes
EN3	Yes
EN4	Yes
Mechanism	Cam action
Adjustable closing speed	Yes
Adjustable latch action	Yes
Maximum door width (mm)	1100
Maximum door weight (kg)	100
Minimum door thickness required (mm)	40
Opening angle	120°
LH and RH doors - universal application	Yes

Note: push or pull side of the door subject to rebate distances.

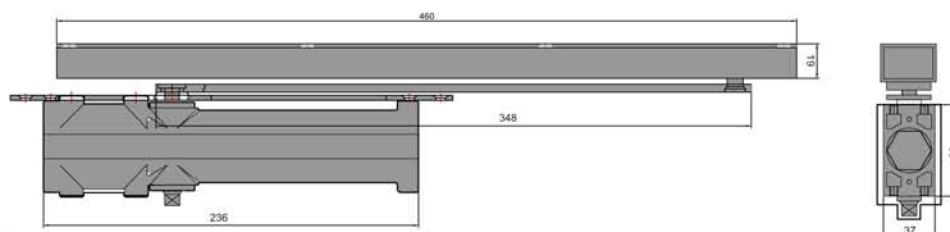
## Features

- Enhanced aesthetics - providing the ability to retain a clean, unhindered appearance to the door and interior
- Totally invisible when the door is closed. Guide rail only visible during opening moment
- Optimum protection against vandalism because of concealed installation
- Can be incorporated within the door pre-fabrication process, allowing complete installation in the factory
- Fully controlled, reliable closing with adjustable latch action
- Tested to Grade 8: 500,000 cycles.
- Hold open unit available

## BS EN 1154 Classification

3	8	4 3	1	1	3
---	---	--------	---	---	---



**DC8024**

**Finish: SBP, MABP, MBL, SILVER**

## Product specification

Power size (adjustable by spring)

EN2	Yes
EN3	Yes
EN4	Yes
Mechanism	Cam action
Adjustable closing speed	Yes
Adjustable latch action	Yes
Maximum door width (mm)	1100
Maximum door weight (kg)	100
Minimum door thickness required (mm)	50
Opening angle	120°
LH and RH doors - universal application	Yes

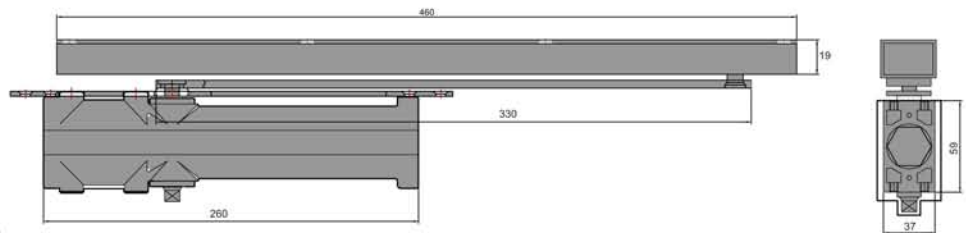
Note: push or pull side of the door subject to rebate distances.

## Features

- Enhanced aesthetics - providing the ability to retain a clean, unhindered appearance to the door and interior
- Totally invisible when the door is closed. Guide rail only visible during opening moment
- Optimum protection against vandalism because of concealed installation
- Can be incorporated within the door pre-fabrication process, allowing complete installation in the factory
- Fully controlled, reliable closing with adjustable latch action
- Tested to Grade 8: 500,000 cycles.
- Hold open unit available

## BS EN 1154 Classification

3	8	4 3	1	1	3
---	---	--------	---	---	---

**DC8025BC**

**Finish: SBP, MABP, MBL, SILVER**

### Product specification

Power size (adjustable by spring)

EN2	Yes
EN3	Yes
EN4	Yes
EN5	Yes
Mechanism	Cam action
Adjustable closing speed	Yes
Adjustable latch action	Yes
Maximum door width (mm)	1250
Maximum door weight (kg)	130
Minimum door thickness required (mm)	50
Opening angle	120°
LH and RH doors - universal application	Yes

Note: push or pull side of the door subject to rebate distances.

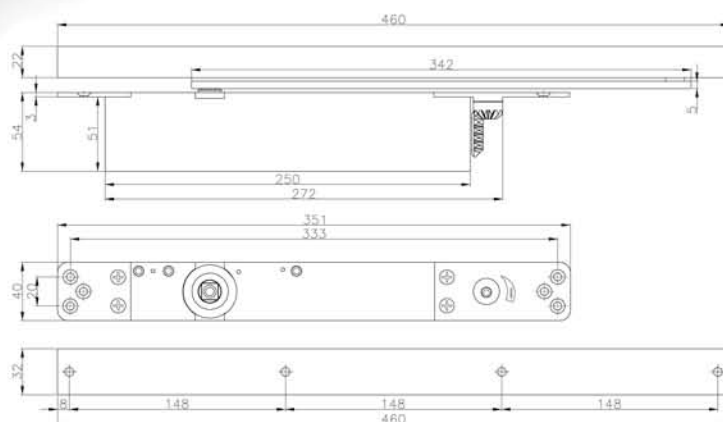
### Features

- Enhanced aesthetics - providing the ability to retain a clean, unhindered appearance to the door and interior
- Totally invisible when the door is closed. Guide rail only visible during opening moment
- Optimum protection against vandalism because of concealed installation
- Can be incorporated within the door pre-fabrication process, allowing complete installation in the factory
- Fully controlled, reliable closing with adjustable latch action
- Tested to Grade 8: 500,000 cycles.
- Hold open unit available

### BS EN 1154 Classification

3	8	2 5	1	1	3
---	---	--------	---	---	---

**DC3036BC**
  
 BS EN 1154


**CE**

**Finish: SBP, MABP, MBL, SILVER**

## Product Specification

Power size (adjustable by spring)

EN3	Yes
EN4	Yes
EN5	Yes
EN6	Yes
Mechanism	Cam action
Adjustable closing speed	Yes
Adjustable latch action	Yes
Adjustable back check	Yes
Maximum door width (mm)	1400
Maximum door weight (kg)	170
Minimum door thickness required (mm)	54
Opening angle	150°
LH and RH doors - universal application	Yes

Note: push or pull side of the door subject to rebate distances.

## Features

- Enhanced aesthetics - providing the ability to retain a clean, unhindered appearance to the door and interior
- Totally invisible when the door is closed. Guide rail only visible during opening moment
- Optimum protection against vandalism because of concealed installation
- Can be incorporated within the door pre-fabrication process, allowing complete installation in the factory
- Fully controlled, reliable closing with adjustable latch action
- Tested to Grade 8: 500,000 cycles.
- Hold open unit available

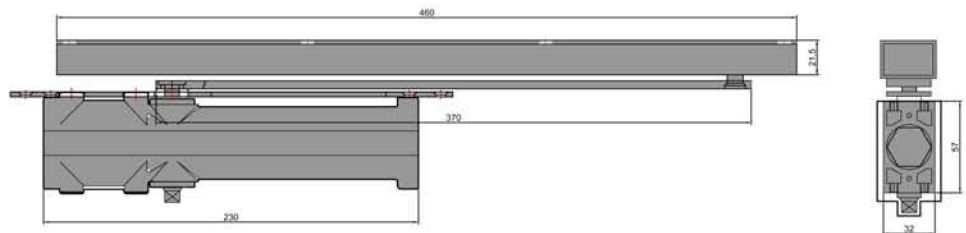
## BS EN 1154 Classification

3	8	2 6	1	1	3
---	---	--------	---	---	---



**DC7003**
  
 BS EN 1154




**Finish: SBP, MABP, MBL, SILVER**

### Product specification

Power size (adjustable by position)

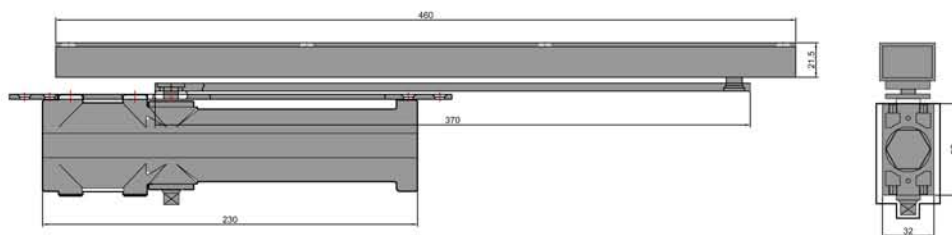
EN3	Yes
Mechanism	Rack and pinion
Adjustable closing speed	Yes
Adjustable latch action	Yes
Maximum door width (mm)	950
Maximum door weight (kg)	60
Opening angle	120°
LH and RH doors - universal application	Yes

Note: push or pull side of the door subject to rebate distances.

### Features

- Closer size EN 3
- Closer fully integrated into door leaf, the guide rail is only visible when door is open
- Suitable for door shutter thickness of 40mm or more
- Non handed system
- Hold open unit available



**DC7004**

**Finish: SBP, MABP, MBL, SILVER**

### Product specification

Power size (adjustable by position)

EN4	Yes
Mechanism	Rack and pinion
Adjustable closing speed	Yes
Adjustable latch action	Yes
Maximum door width (mm)	1100
Maximum door weight (kg)	80
Opening angle	120°
LH and RH doors - universal application	Yes

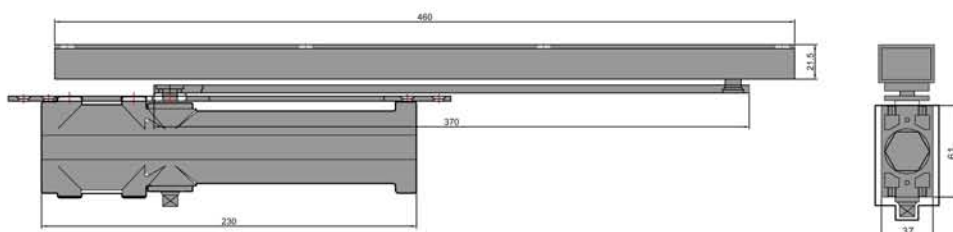
Note: push or pull side of the door subject to rebate distances.

### Features

- Closer size EN4
- Closer fully integrated into door leaf, the guide rail is only visible when door is open
- Suitable for door shutter thickness of 40mm or more
- Non handed system
- Hold open unit available

**DC7025**
  
 BS EN 1154




**Finish: SBP, MABP, MBL, SILVER**

### Product specification

Power size (adjustable by spring)

EN2	Yes
EN3	Yes
EN4	Yes
EN5	Yes
Mechanism	Rack and pinion
Adjustable closing speed	Yes
Adjustable latch action	Yes
Adjustable back check	Yes
Maximum door width (mm)	1200
Maximum door weight (kg)	100
Opening angle	120°
LH and RH doors - universal application	Yes

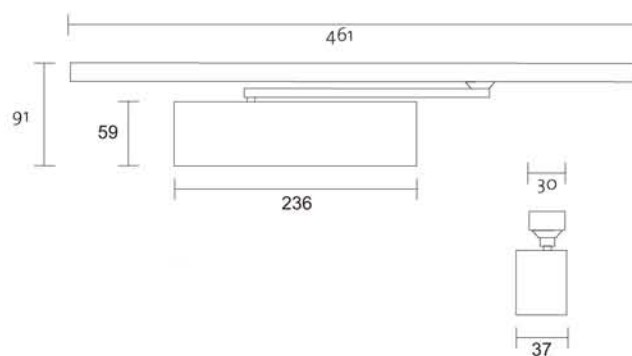
Note: push or pull side of the door subject to rebate distances.

### Features

- Closer size EN 2-5
- Closer fully integrated into door leaf, the guide rail is only visible when door is open
- Suitable for door shutter thickness of 50mm or more
- Non handed system
- Hold open unit available

**DC9024**


With SSS cover and arm

**Finish: Silver, SSS**


## Product specification

Power size (adjustable by spring)

EN2	Optional
EN3	Yes
EN4	Optional
Mechanism	Cam action
Adjustable closing speed	Yes
Adjustable latch action	Yes
Maximum door width (mm)	1100
Maximum door weight (kg)	100
Opening angle	120°
Tested to BS EN 1154: 1997	Yes
CE marked	Yes
LH and RH doors - universal application	Yes
Fire rated (BS EN 1634-1: 2000)	Yes

Note: push or pull side of the door subject to rebate distances.

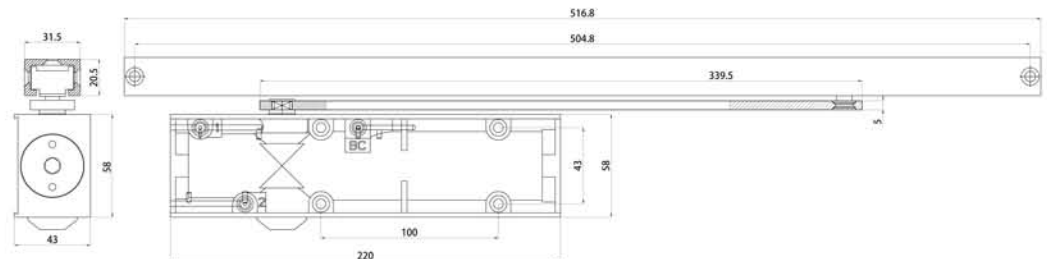
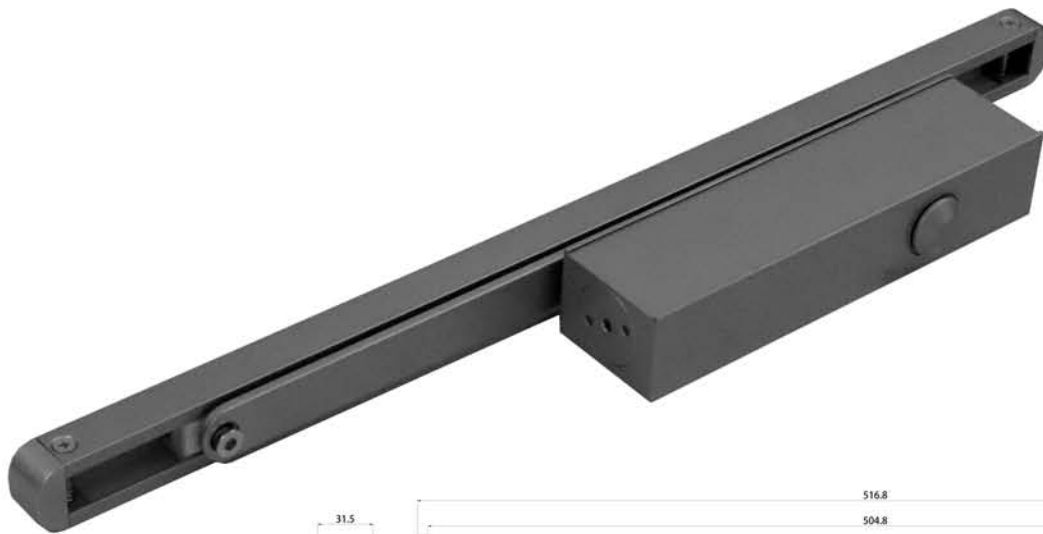
## Features

- Uniform appearance through out the entire slide channel range
- Height adjustable standard slide channel
- Mechanically secured cover
- Simple, fast installation
- Inexpensive cam-action technology for standard interior doors
- Exceptional ease of use and fully controlled closing action
- Optimum adaptability of the closing speed with reliable latching
- Hold open unit available

## BS EN 1154 Classification

3	8	4 2	1	1	3
---	---	--------	---	---	---

**DC2024BC**
  
 BS EN 1154


**CE**

**Finish: SBP, MABP, MBL, SILVER**

## Product specification

Power size (adjustable by spring)

EN2	Yes
EN3	Yes
EN4	Yes
Mechanism	Cam action
Adjustable closing speed	Yes
Adjustable latch action	Yes
Maximum door width (mm)	1100
Maximum door weight (kg)	100
Opening angle	120°
Tested to BS EN 1154: 1997	Yes
CE marked	Yes
LH and RH doors - universal application	Yes
Fire rated (BS EN 1634-1: 2000)	Yes

Note: push or pull side of the door subject to rebate distances.

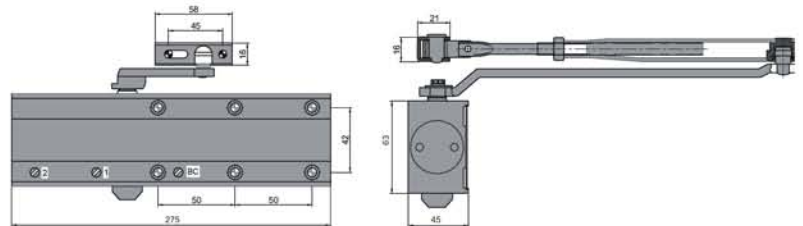
## Features

- Uniform appearance through out the entire slide channel range
- Height adjustable standard slide channel
- Simple, fast installation
- Exceptional ease of use and fully controlled closing action
- Optimum adaptability of the closing speed with reliable latching
- Hold open unit available
- Tested to grade 8: 500,000 cycle tested
- With beckcheck

## BS EN 1154 Classification

4	8	4 2	1	1	3
---	---	--------	---	---	---



**DC6026BC**


**Finish: Silver, Gold**  
**Cover & Arm finishes: SSS, PSS, PB/PVD**

### Product specification

Power size (adjustable by spring)

EN2 (up to 850mm/45kg)	Yes
EN3 (up to 950mm/60kg)	Yes
EN4 (up to 1100mm/80kg)	Yes
EN5 (up to 1250mm/110kg)	Yes
EN6 (up to 1400mm/140kg)	Yes
Mechanism	Rack and pinion
Adjustable closing speed	Yes
Adjustable latch action	Yes
Adjustable delayed action	Optional
Adjustable back check	Yes
Maximum door width (mm)	1400
Maximum door weight (kg)	140
Opening angle	180°
Tested to BS EN 1154: 1997	Yes
CE marked	Yes
DDA (min door width 728mm)	Fig 1
DDA (min door width 835mm)	Fig 66
LH and RH doors - universal application	Yes
Fire rated (BS EN 1634-1: 2000)	Yes

### Features

- Heavy duty adjustable door closer
- Compact format in timeless design
- Simple, easy installation & guaranteed quality
- Non-handed unit
- Attractively priced solution with optimum reliability
- Constant closing action virtually unaffected by temperature fluctuations, with adjustable latch action
- Optimum wall and door protection, due to backcheck
- Smooth door action, thanks to high mechanical efficiency
- Hold open arm available
- Parallel arm bracket available
- Suitable for 120min fire-rated timber and 240min metal doors
- Tested to Grade 8: 500,000 cycles.

### BS EN 1154 Classification

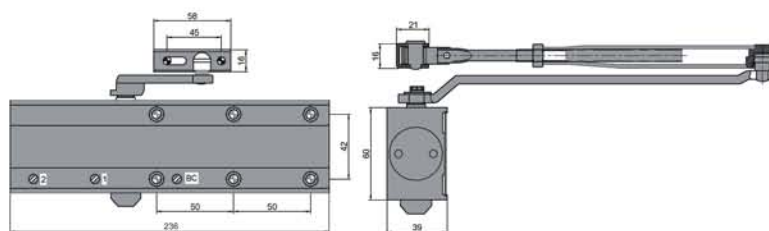
Figure 1 Fitting	4	8	2 6	1	1	3
Figure 66 Fitting	3	8	2 5	1	1	3



**Optional :**  
Parallel Arm Bracket for Door Closer

**DC6025BC**


Silver

**Finish: Silver, Gold, Black**  
**Cover & Arm finishes: SSS, PSS, PB/PVD**


## Product specification

Power size (adjustable by spring)

EN2 (up to 850mm/45kg)	Yes
EN3 (up to 950mm/60kg)	Yes
EN4 (up to 1100mm/80kg)	Yes
EN5 (up to 1250mm/110kg)	Yes
Mechanism	Rack and pinion
Adjustable closing speed	Yes
Adjustable latch action	Yes
Adjustable delayed action	Optional
Adjustable back check	Yes
Maximum door width (mm)	1250
Maximum door weight (kg)	110
Opening angle	180°
Tested to BS EN 1154: 1997	Yes
CE marked	Yes
DDA (min door width 728mm)	Fig 1
DDA (min door width 835mm)	Fig 66
LH and RH doors - universal application	Yes
Fire rated (BS EN 1634-1: 2000)	Yes

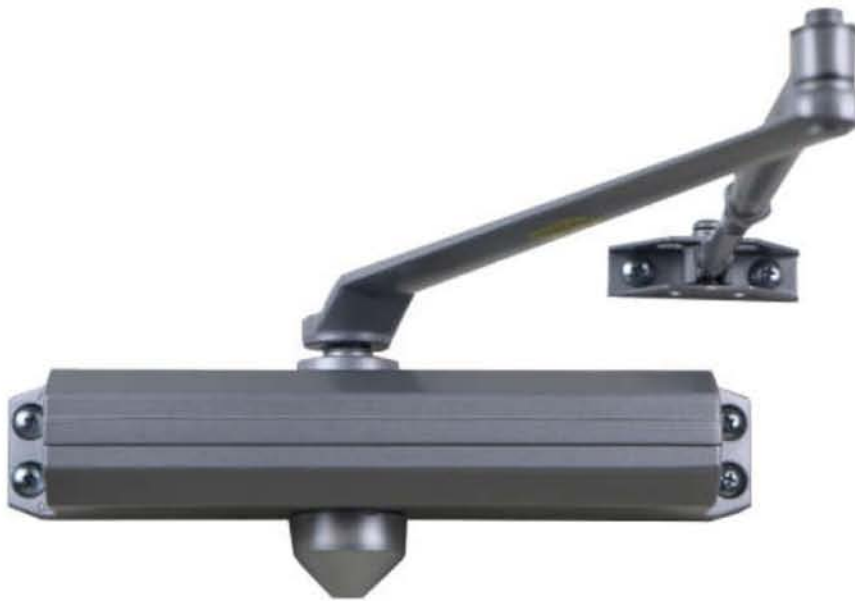
## Features

- Heavy duty adjustable door closer
- Compact format in timeless design
- Simple, easy installation & guaranteed quality
- Non-handed unit
- Attractively priced solution with optimum reliability
- Constant closing action virtually unaffected by temperature fluctuations, with adjustable latch action
- Optimum wall and door protection, due to backcheck
- Smooth door action and thanks to high mechanical efficiency
- Hold open arm available
- Parallel arm bracket available
- Suitable for 120min fire-rated timber and 240min metal doors
- Tested to Grade 8: 500,000 cycles.

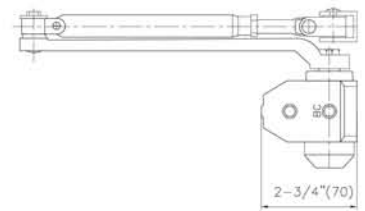
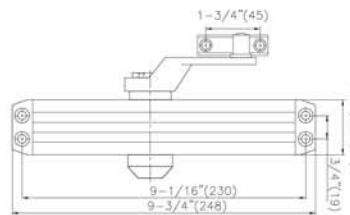
## BS EN 1154 Classification

Figure 1 Fitting	4	8	2 5	1	1	3
Figure 66 Fitting	4	8	2 4	1	1	3


**Optional :**  
 Parallel Arm Bracket for Door Closer

**DC9016BC**


**Finish: Silver, MBL**  
**Cover & Arm Finish: Silver, SSS, MBL**



## Product specification

Power size (adjustable by spring)	
Size 1 (up to 710mm/30 kg)	Yes
Size 2 (up to 910mm/45 kg)	Yes
Size 3 (up to 1070mm/65 kg)	Yes
Size 4 (up to 1220mm/85kg)	Yes
Size 5 (up to 1370mm/120kg)	Yes
Size 6 (up to 1520mm/150kg)	Yes
Mechanism	Rack and pinion
Adjustable closing speed	Yes
Adjustable latch action	Yes
Adjustable delayed action	Optional
Adjustable back check	Yes
Maximum door width (mm)	1520
Maximum door weight (kg)	150
Opening angle	180°
LH and RH doors - Universal application	Yes

## Options

Hold open arm available
Metal cover (Silver finish)
SS304 SSS finish cover & SN finish arm

## Features

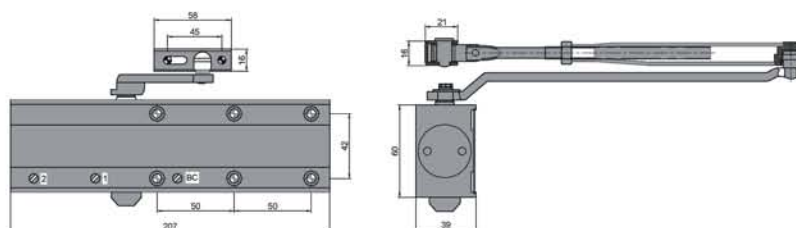
- Adjustment: Spring power size adjustable 1 to 6  
Adjustable backcheck  
Adjustable sweep speed  
Adjustable latching speed
- Compact format in timeless design
- Constant closing action virtually unaffected by temperature fluctuations, with adjustable latch action
- Optimum wall and door protection, due to backcheck
- Suitable for fire-rated timber and metal doors
- UL certified and UL 10C 3 hours fire rating
- Forged steel arm for high traffic abuse
- Tri-packed for regular arm, top jamb and parallel arm mounting



**DC5024**


With SSS cover and arm

**Finish: Silver, Gold, Black**  
**Cover & Arm finishes: SSS, PSS, PB/PVD**


**Product specification**

Power size (adjustable by position)

EN2 (up to 850mm/45kg)	Yes
EN3 (up to 950mm/60kg)	Yes
EN4 (up to 1100mm/80kg)	Yes
Mechanism	Rack and pinion
Adjustable closing speed	Yes
Adjustable latch action	Yes
Adjustable back check (CE in Fig 66)	Yes
Maximum door width (mm)	1100
Maximum door weight (kg)	80
Angle	180°
Tested to BS EN 1154: 1997	Yes
CE marked	Yes
DDA (min door width 936mm)	Fig 1
DDA (min door width 753mm)	Fig 66
LH and RH doors - universal application	Yes
Fire rated (BS EN 1634-1: 2000)	Yes

**Features**

- Slimline compact design
- Quick and easy to install
- Non-handed unit
- Outstanding value for money
- Constant closing action virtually unaffected by temperature fluctuations
- Reliable closing with adjustable latching action
- Hold open arm available
- Parallel arm bracket available
- Suitable for 120min fire-rated timber and 240min metal doors
- Tested to Grade 8: 500,000 cycles.

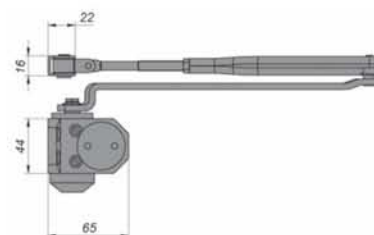

**BS EN 1154 Classification**

Figure 1 Fitting	4	8	2 4	1	1	3
Figure 66 Fitting	4	8	3	1	1	3



**Optional :**  
Parallel Arm Bracket for Door Closer



**DC1003**


**Finish: Silver**

### Product specification

Power size (adjustable by position)

EN3	Yes
Mechanism	Rack and pinion
Adjustable closing speed (2 speeds)	Yes
Maximum door width (mm)	950
Maximum door weight (kg)	60
Angle of operation	Grade 4, 160°
LH and RH doors – universal application	Yes

Note: Parallel arm bracket supplied as extra.

### Features

- A budget over head door closer for general applications
- Quick and easy to install
- Non-handed, suitable for standard, parallel arm & frame installation
- Fully control closing cycle
- Hold open arm available
- Suitable for 120min fire-rated timber and 240min metal doors
- Tested to Grade 8: 500,000 cycles.

### BS EN 1154 Classification

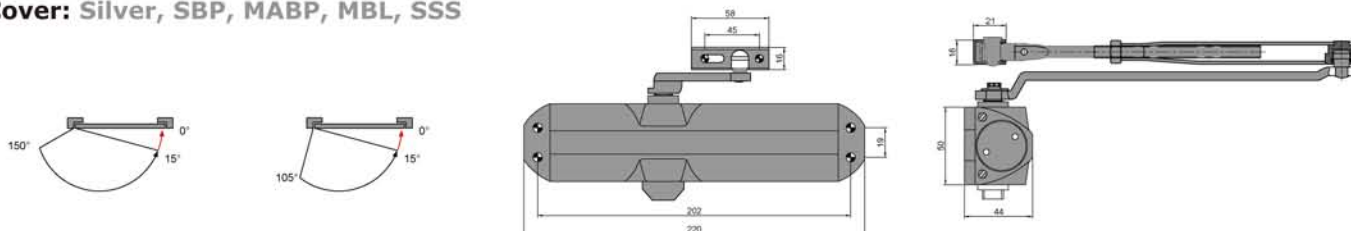
Figure 1 Fitting

4	8	3	1	1	3
4	8	3	1	1	3

Figure 66 Fitting

**DC1024**


**Finish:** Silver, SBP, MABP, MBL  
**Cover:** Silver, SBP, MABP, MBL, SSS


**Product specification**

Power size (adjustable by position)

EN2	Yes
EN3	Yes
EN4	Yes
Mechanism	Rack and pinion
Adjustable closing speed	Yes
Adjustable latch action	Yes
Maximum door width (mm)	1100
Maximum door weight (kg)	80
LH and RH doors – universal application	Yes
CE marked	Yes

**Features**

- Low cost solution for standard doors
- Quick and easy to install
- Non-handed unit
- Inexpensive, proven reliability
- Closing cycle largely unaffected by temperature
- Hold open arm available
- Parallel arm bracket available
- Suitable for 120min fire-rated timber and 240min metal doors
- Tested to Grade 8: 500,000 cycles.

**BS EN 1154 Classification**

Figure 1 Fitting	4	8	2 4	1	1	4
Figure 66 Fitting	4	8	3	1	1	4



**Optional :**  
Parallel Arm Bracket for Door Closer

**DC1503**


Beige



Silver



White



Brown



Black



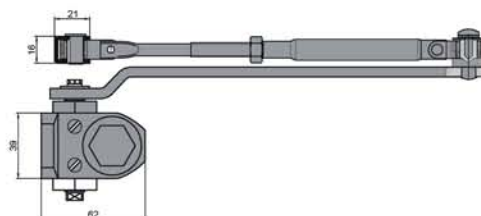

**Finish:** Silver, Gold, White, Black, Brown, Beige

**Product specification**

Power size (adjustable by position)

EN3	Yes
Mechanism	Rack and pinion
Adjustable closing speed (2 speeds)	Yes
Maximum door width (mm)	950
Maximum door weight (kg)	60
Angle of operation	Grade 4, 160°
LH and RH doors – universal application	Yes

Note: Parallel arm bracket supplied as extra.


**Features**

- A budget over head door closer for general applications
- Quick and easy to install
- Non-handed, suitable for standard, parallel arm & frame installation
- Fully control closing cycle
- Hold open arm available
- Suitable for 120min fire-rated timber and 240min metal doors
- Tested to Grade 8: 500,000 cycles.

**BS EN 1154 Classification**

Figure 1 Fitting

4	8	3	1	1	3
4	8	3	1	1	3

Figure 66 Fitting




**Optional :**  
Parallel Arm Bracket for Door Closer

**DC5024/SAC**


**Features**

- Closer size EN3
- Suitable for door weight 60kg & 950mm wide
- Available with stainless steel cover
- Hold open unit available


**DC6025/SAC**


**Features**

- Closer size EN2-4
- Suitable for door weight 80kg & 1100mm wide
- Available with stainless steel cover
- Hold open unit available


**DC6026/SAC**

**Features**

- Closer size EN2-5
- Suitable for door weight 100kg & 1250mm wide
- Available with stainless steel cover
- Hold open unit available



**Finish: Silver, Gold, White, Black**





Radius cover



Square cover

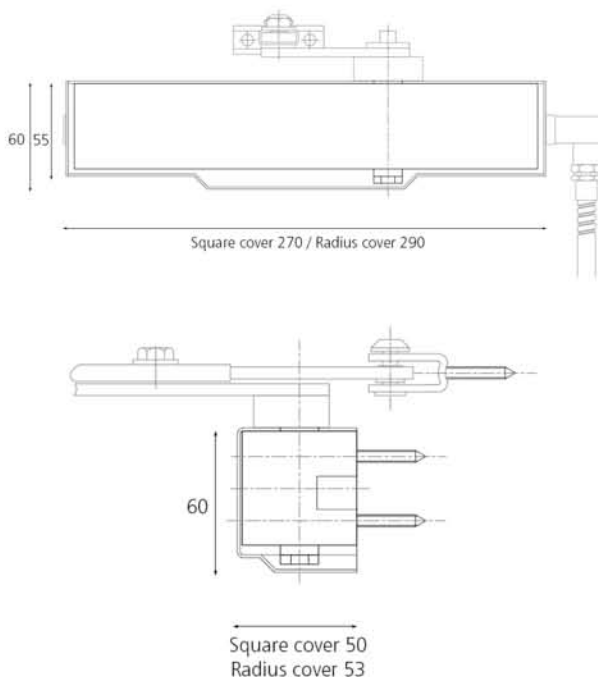


**Finish: Silver**  
**Cover & Arm finishes: SSS**



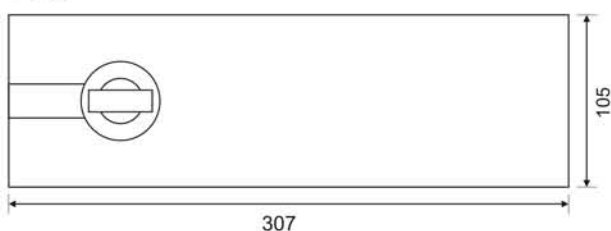

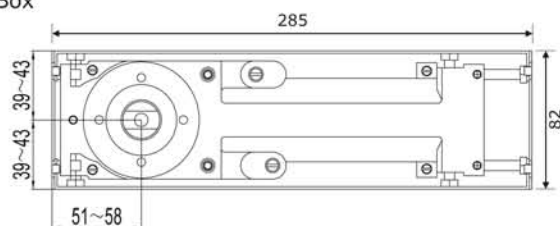
The EuroArt 9000 series E-mag range is available for use where low opening forces are required, such as care home, hospitals or where the Equality Act is a consideration. There are two closers within the range, one offering a hold open fixed power size 4 which, when fitted in swing free mode, allows the door to be opened with no resistance from the closer. However, when the buildings fire alarm is activated, power is cut to the unit and the closer then shuts the door. The other is a dual power closer that, when fitted, operates in power size 1, allowing the door to be opened by a force of under 22N. However, when the buildings fire alarm is activated, power is cut to the unit and the closer then becomes a power size 4 and is able to shut the door.

All the EuroArt 9000 Series of E-mag are supplied with an adaptor which allows easy conversion from hold open to swing free mode.

Both option offers the choice of either a radius or square cover with matching adjustable arms, each utilizing the unique high efficiency cam and roller action, and both have a plug in power loop for easy of fitting. Longer loop are available as an optional extra.






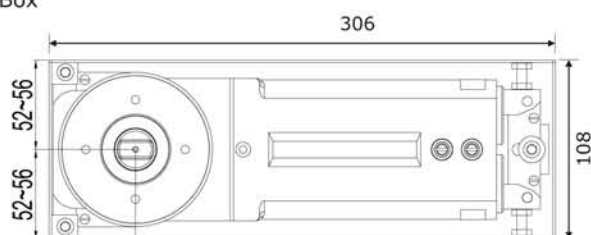
Ref no.		9870	9070
Closing Force	EN Size	4	1 & 4
Door Size (Max)	Width (mm)	1100	1100
	Width (kg)	80	80
Application	Fig 1	✓	✓
	Fig 6	✓	✓
	Fig 66	✓	✓
Mechanism	Rack & Pinion	✗	✗
	Cam & Roller	✓	✓
With Cover		✓	✓
Power Shoe Bracket		✓	✓
Angle of Opening		180°	180°
Non Handed		✓	✓
Power Adjustment	By Spring	✗	✗
	By Template	✗	✗
Adjustable Sweep Speed		✓	✓
Adjustable Latching Speed		✓	✓
Adjustable Backcheck		✗	✗
Adjustable Delayed Action		✗	✗
Dual Power		✗	✓
CE Marked		✓	✗
Certifire Approved		✓	✗
Guarantee		2 yrs	2 yrs

**FS7524**

**Closing control**

**Finish: SSS, PSS**
**Plate**

**Box**


### Features

- Body in heavy duty cast iron to ensure high durability.
- Suitable for double and single action doors upto 150kg.
- Suitable for timber, metal and glass doors.
- Adjustment within cement box to solve possible alignment problems on site without taking down the door.
- Suitable for the use on fire rated doors.
- Mechanical back check to prevent uncontrolled opening.
- Fixed power size EN2-4 with high efficiency allows a real personalization of opening and closing forces.
- Max opening upto 180° in both swing with hydraulic control from 105°. Free rotation from 105° to 180°.
- High quality anti-freezing oil and seal rings, makes the floor springs virtually insensitive to temperature changes.
- Closing speed and latching speed controlled by two independent valves to ensure consistent performance.
- Easier door opening and improved accessibility due to Cam-Motion technology.
- Cover plate and eyelet in satin stainless steel for



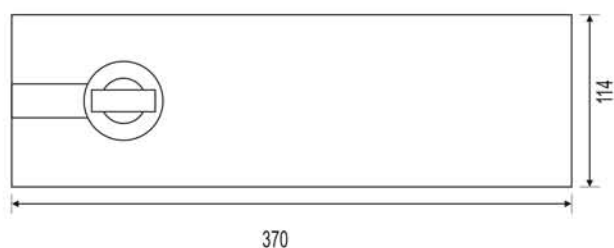

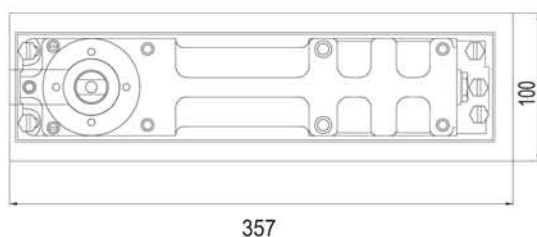
**FS9403**

**Closing control**

**Finish: SSS, PSS**
**Plate**

**Box**


### Features

- Body in heavy duty cast iron to ensure high durability.
- Suitable for double and single action doors upto 120kg.
- Suitable for timber, metal and glass doors.
- Fixed power size EN3 with high efficiency allows a real personalization of opening and closing forces.
- Wide range of adjustment within cement box to solve possible alignment problems on site without taking down the door.
- Heat treated high alloy steel mechanism with ball bearing race for optimum efficiency.
- High quality anti-freezing oil and seal rings, makes the floor springs virtually insensitive to temperature changes.
- Closing speed and latching speed controlled by two independent valves to ensure consistent performance.
- Easier door opening and improved accessibility due to Cam-Motion technology.
- Cover plate and eyelet in satin stainless steel for a consistence aesthetic appeal.

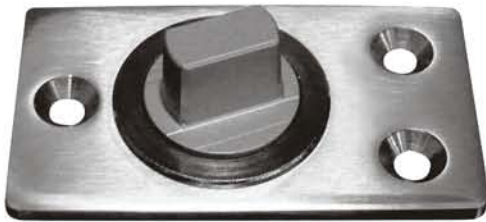


**FS9516**

**Closing control**

**Finish: SSS, PSS**
**Plate**

**Box**


### Features

- Body in heavy duty cast iron to ensure high durability.
- Suitable for double and single action doors upto 400kg.
- Suitable for timber, metal and glass doors
- Adjustment within cement box to solve possible alignment problems on site without taking down the door.
- Suitable for the use on fire rated doors.
- Mechanical back check to prevent uncontrolled opening.
- Adjustable power EN1-6 with high efficiency allows a real personalization of opening and closing forces.
- Max opening upto 180° in both swing with hydraulic control.
- Over pressure value to safe guard the mechanical components in case of abuse.
- High quality anti-freezing oil and seal rings, makes the floor springs virtually insensitive to temperature changes.
- Closing speed and latching speed controlled by two independent valves to ensure consistent performance.
- Easier door opening and improved accessibility due to Cam-Motion technology.
- Cover plate and eyelet in satin stainless steel for



**1000/25F**

**2000/4F**

**Finish: SSS**

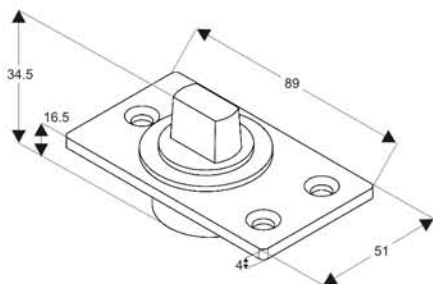
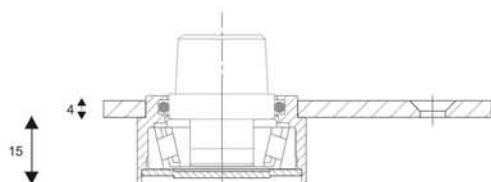
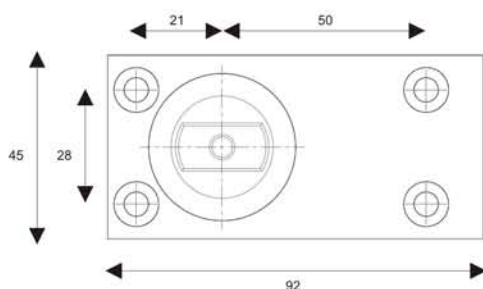
The EuroArt floor pivot uses the same class leading bearing technology as the floor spring and is used in applications where there is no requirement for closing a door, and using hinges is difficult because the door is heavy or a double action is required.

The 2000/4F can carry a door up to 400kg whilst having a very small footprint, and only has a recess below the floor surface of 15mm.

The 1000/25F can carry a door upto 250kg with a recess below the floor surface of 16.5mm.

The range is compatible with all EuroArt floor spring strap systems and top centres, which must be ordered separately, if required.

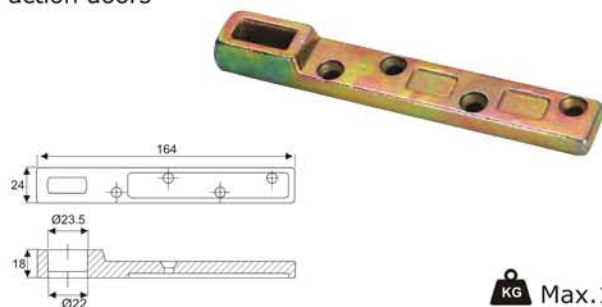
Different height spindle extensions between 5mm and 50mm are available, but these must be ordered with the pivot as they cannot be changed on site.

**1000/25F**

**2000/4F**


Ref.		1000/25F	2000/4F
Closing Force	EN Size	N/A	N/A
Door Size	Width (mm)	1400	1800
	Weight (kg)	250	400
Mechanism	Rack & Pinion	✗	✗
	Cam & Roller	✗	✗
Angle of Opening		N/A	N/A
Non Handed		✓	✓
Power Adjustment	By Spring	✗	✗
	By Template	✗	✗
Action Availability	Single	✓	✓
	Double	✓	✓
Adjustable Sweep Speed		✗	✗
Adjustable Latching Speed		✗	✗
Adjustable Backcheck		✗	✗
Adjustable Delay Action		✗	✗
Hold Open		✗	✗
Guarantee		10 yrs	10 yrs
<b>OPTIONS</b>			
Single Action Accessories		✓	✓
Double Action Accessoried		✓	✓
Spindle Extention		✓	✓

**AC10.01**

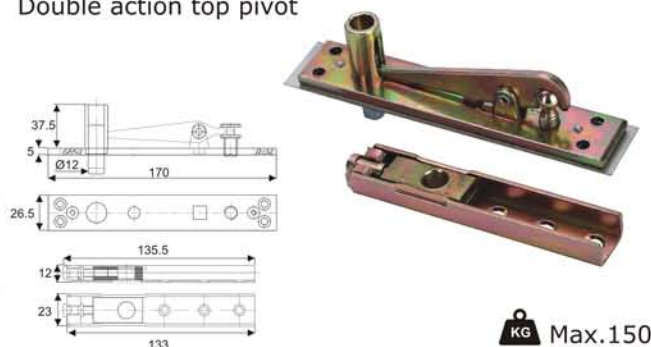
Reversible bottom arm in steel for double action doors



**KG** Max.150

**AC10.02**

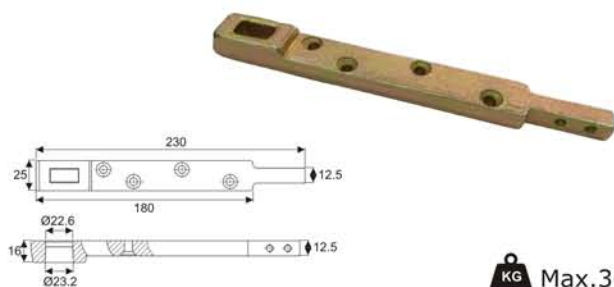
Double action top pivot



**KG** Max.150

**AC10.06**

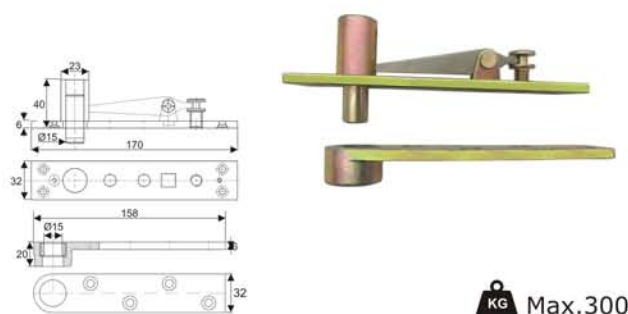
Heavy Duty bottom arm in steel for double action doors



**KG** Max.300

**AC10.07**

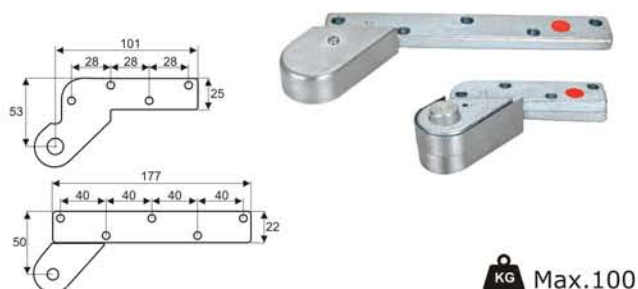
Heavy Duty double action top pivot



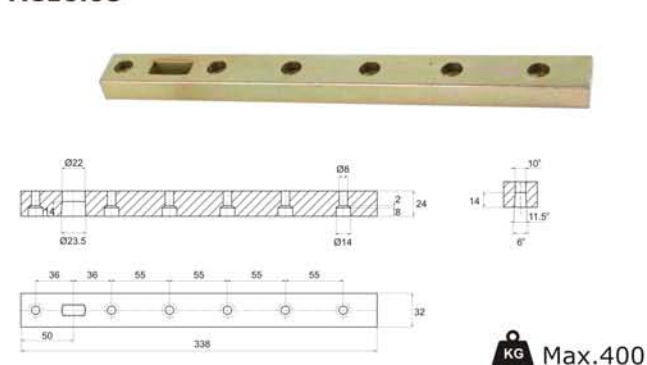
**KG** Max.300

**SA.FS2004**

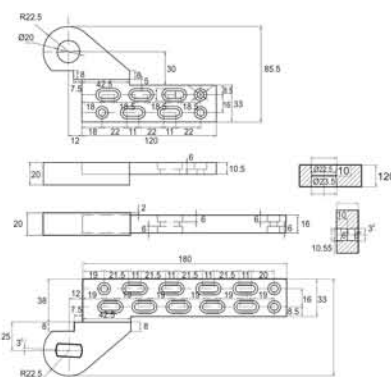
Single action accessories set for right / left hand doors



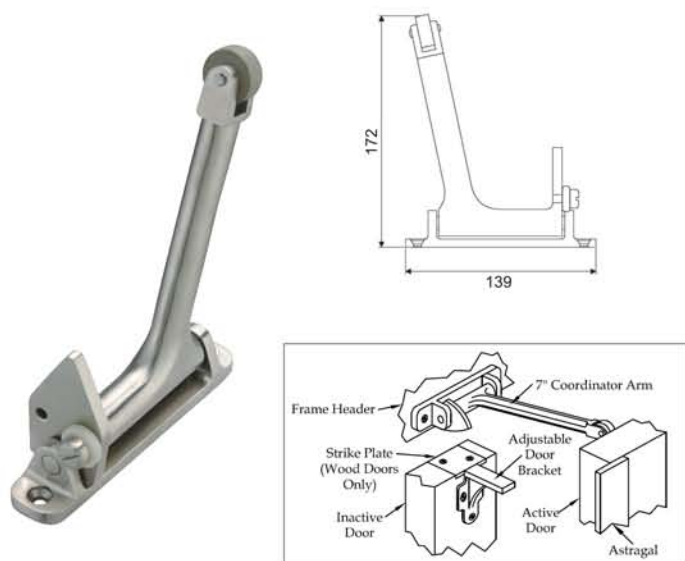
**KG** Max.100

**AC10.08**


**KG** Max.400

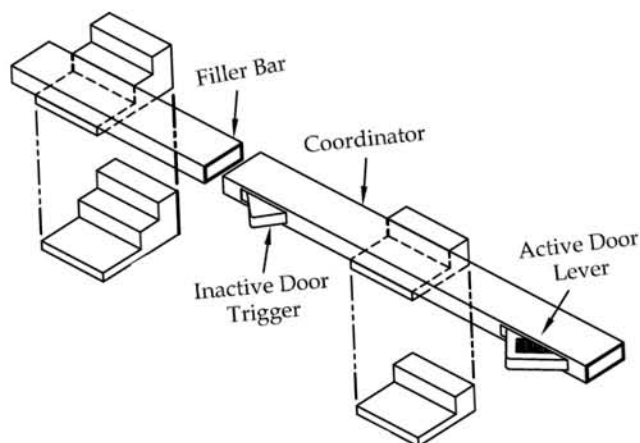
**SA.FS9516**


**KG** Max.400



### SMC 3010 - Gravity Coordinator

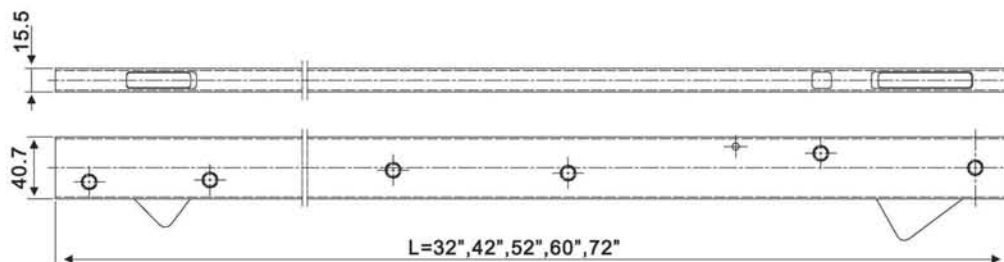
- Roller arm stops active door from closing before inactive door.
- Active door up to and including 1219mm wide.
- Inactive door up to and including 1036mm wide.
- Both doors over 670mm wide.
- Closing of inactive door causes the strike plate on top of the door to lift the arm and close the active door. As inactive door closes, the nylon roller lifts the coordinator arm.
- Gravity arm and door brackets are field-adjustable for installation ease.
- Standard finish = Satin Stainless Steel.



### EA3700 Series - Door Coordinator

- Heavy duty coordinator.
- For use on pair of doors when one door must close before the other.
- Active door lever holds the active door open until the inactive door closes enough to trip the release Mechanism.
- Safety override allows active door to close first when extreme force applied.

Reference Code	Door Width (mm)
EA3701	≤1500
EA3711	1500-1800
EA3721	1800-2400
EA3731	2400-2645
EA3741	2500-2800

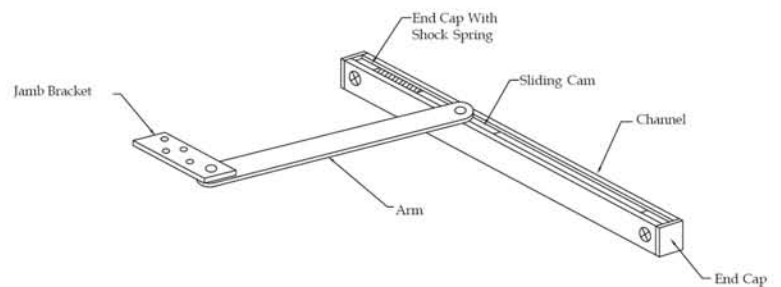




**ODS 4000 : For High Traffic Doors**  
**ODS 4005 : For Medium Traffic Doors**



**Finish: SSS**



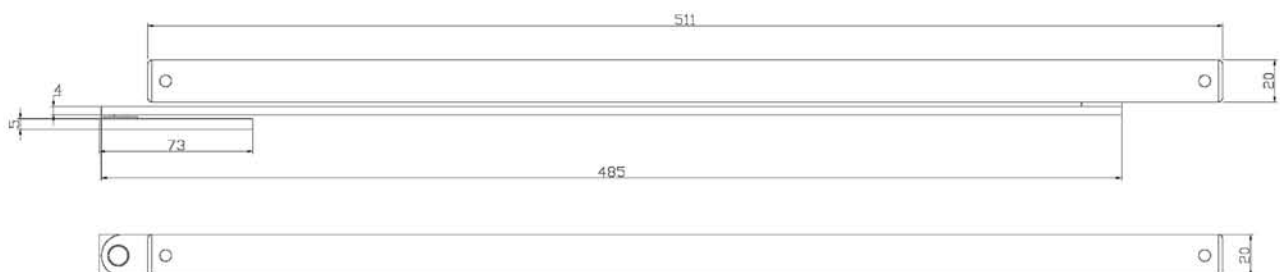
### General Information

Overhead holders and stops are used to prevent unnecessary damage to the door, frame, wall and other door hardware by limiting the degree of door swing. They are installed at the top of a door opening; therefore, out of the general reach and not a tripping hazard. Whether for commercial or residential application, the use of overhead holders and stops extends the life of the opening and other hardware.

EuroArt offers three functions for most Overhead Stops and Holders.

- Hold Open – Door will stay held open at the selected degree of opening. Hold open adjustment screw controls the mount of force required to disengage the hold open mechanism.
- Stop – Door stops at selected degree of opening.
- Friction – Most commonly used on doors without closers. Door will virtually stay held open at the selected degree of opening. Friction tension adjustment screw controls the amount of resistance when opening and closing the door.

### ODS4005





# What Should Panic Hardware do?



- Should be functionally operational 24x7
- Offer safe and reliable exiting solution with minimal effort without prior knowledge of operation in a fire emergency
- Be suitable for the door to which it is installed - correct application and fixings
- Be suitable for the type of pedestrian traffic using the door (Panic application such as shops/schools/hospitals/cinemas or emergency application such as office/private apartments/store rooms)
- Easy to operate - low forces only

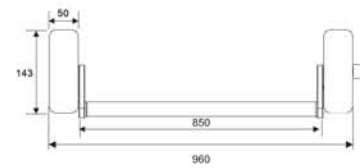
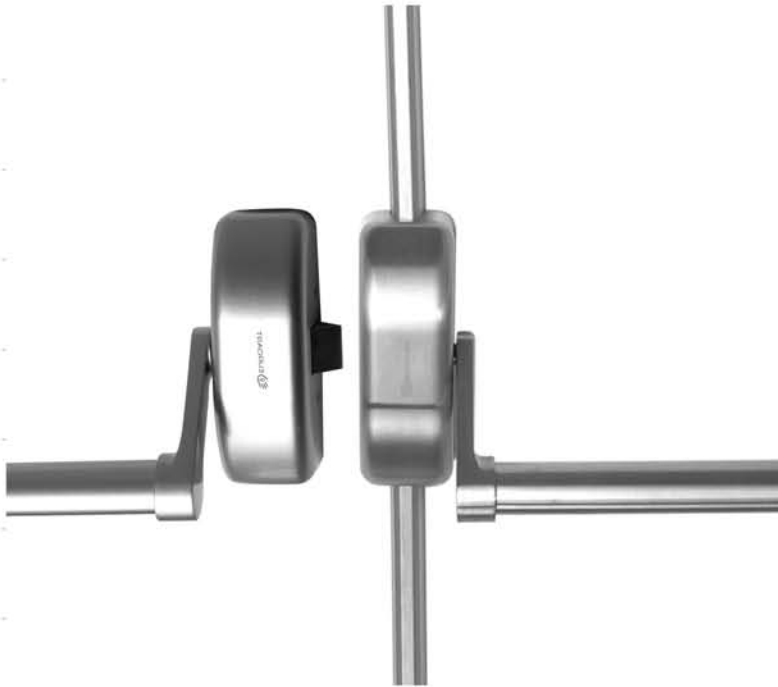


## EuroArt Panic Exit Device Product Features:


- CE marked & tested to EN1125
- Tested to Grade 7: 200,000 test cycles, ensuring durability for everyday use
- Easily reversible for use on left or right handed doors
- Microswitch option available for EED300 series: used as a Request to Exit switch to shunt alarm systems, release electromagnetic locks or monitor degrees

According to EN1125, the length of the panic exit device should be as near as possible to the effective width of the opening and not less than 60% of the width of the opening



**EED200 SERIES**


**EED201**  
Single Panic Latch




**EED205**  
Mortice Lock

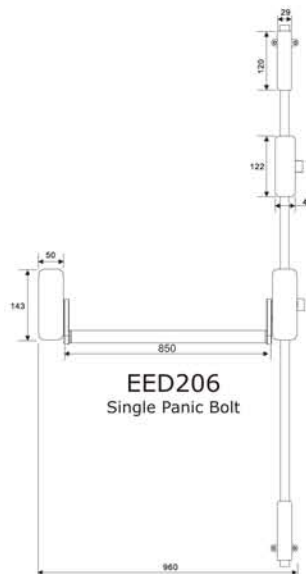

**Finish: SSS**

**Double Door Configurations**

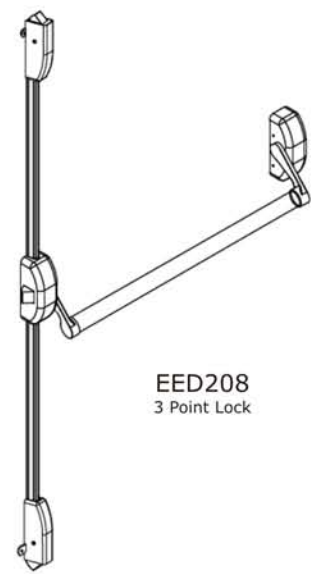
Rebated Doors



Non Rebated Doors



**EED206**  
Single Panic Bolt



**EED208**  
3 Point Lock

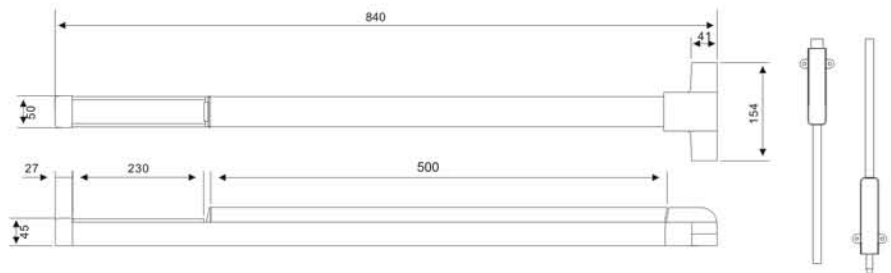
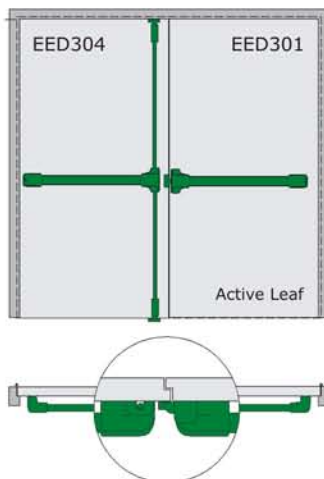
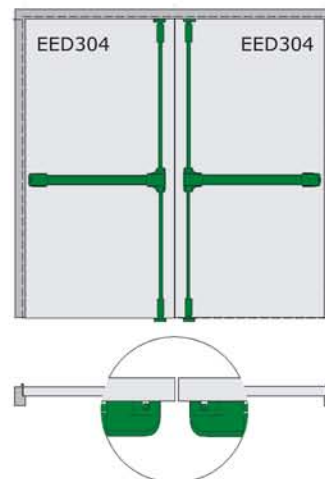
**Features**

- Elegant and highly functional panic latch
- Operated by downward thrust of the cross bar to give a speedy exit in panic situation
- Available in painted steel and SS grade304
- Anti-thrust mechanism to protect against attack
- Fire rated for use on timber and steel doors

**Product specification**

- Suitable for doors upto 1440mm wide and 2200mm height
- Supplied with 850mm rod as standard
- Door weight upto 200kg
- Non handed, suitable with out alteration for left or right hand applications
- Top rods available for doors upto 3000mm high

**EED300 SERIES**

**EED301**
**EED304**

**Double Door Configurations**
**Rebated Doors**

**Non Rebated Doors**

**Features**


- Available in painted steel and SS grade304
- Optional hold-back available enabling the door to be put into free access
- Fire rated for use on timber and steel doors
- Top rods available for doors upto 3000mm high

**Product specification**


- Suitable for doors upto 1320mm wide and 2133mm height
- Door weight upto 200kg
- Non handed, suitable with out alteration for left or right hand applications
- Micro switch option available

**Finish: Silver, SSS**


**EAD230**

**EAD231**


- Available in SS grade304
- Suitable for 45mm single cylinder, that can be keyed alike or master keyed
- Fire rated for use on timber and steel doors
- Supplied with spindle for doors between 40 & 65mm wide

**EAD210**


- Available in SS grade304
- Storeroom, passage, dummy function available
- Fire rated for use on timber and steel doors

**EAD220**


- Available in SS grade304
- Storeroom, passage, dummy function available
- Fire rated for use on timber and steel doors

**DOUBLE DOOR STRIKE**

**DDS222**
**DDS223**
**SINGLE DOOR STRIKE**

**SDS222**

- To be used on rebated double doors and single leaf doors flushed with frame


**Finish: SSS**





## Door Accessories

Assorted accessories to finish  
any home or contract


**DSS213 - Stainless Steel**


- Supplied with SS screw


**Finish:** SSS, PSS, PB/PVD, BL/PVD, MAB, SB/PVD

**DSS214 - Stainless Steel**

Suitable for doors with 15mm undercut



- Supplied with SS screw


**DSZ301 - Zinc Alloy**


- Supplied with SS screw


**Finish:** SN, CP, PB, MAB, MBL, SB

**DSZ302 - Zinc Alloy**


Suitable for doors with 15mm undercut




- Supplied with SS screw

**DSS215**



- Supplied with SS screw

**DSS215H**


- Supplied with SS screw

**DSS216**


- Supplied with SS screw

**DSS218**


- Supplied with SS screw


**Finish: SSS, PSS, MAB, PB/PVD, BL/PVD**

**DSS206**

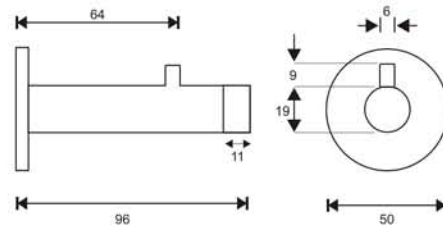

**SSS**

**MAB**

**PSS**

**PB**

**DSS207**


- Wall mounted door stopper with pin



**DSS235**


**Finish: SSS, PSS, MAB, PB/PVD, BL/PVD**

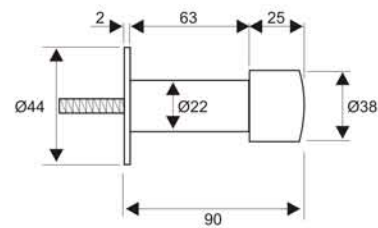


**DSS280 - 50mm**


- Wall mounted door stopper


**DSS285 - 80mm**





- Supplied with SS screw

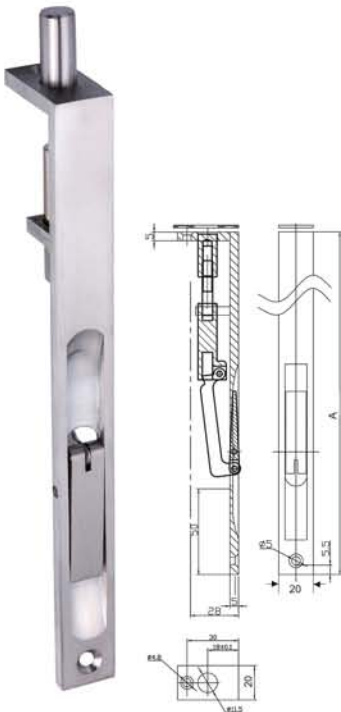

**DSS219**

- Supplied with SS screw

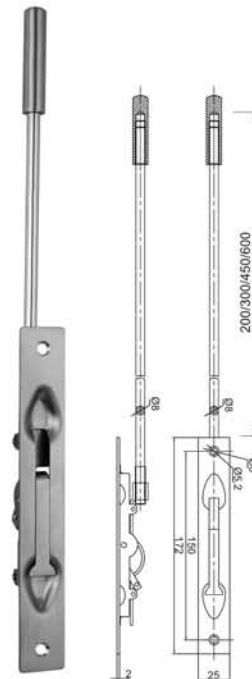


**Finish: SSS, PSS, MAB, PB/PVD, BL/PVD**

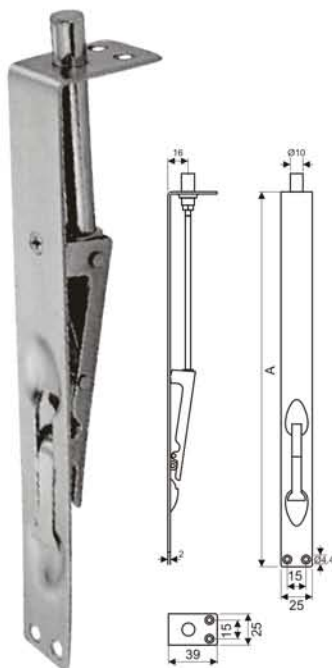
**DSZ219 - Zinc Alloy**

**Finish: SN, PB, MAB**
**MDH102 - Stainless Steel**

**Finish: SSS**
**DSZ220 - Zinc Alloy**

**Finish: SN, PB, MAB**
**DSZ218 - Zinc Alloy**

**Finish: SN, PB, MAB**

**Investment Cast Stainless Steel Lever Action Flush Bolt**


Ref. No.	Size
● FBS201	: 150mm
● FBS202	: 200mm
● FBS203	: 300mm
● FBS204	: 450mm
● FBS205	: 600mm
● FBS206	: 750mm
● FBS207	: 900mm
● FBS208	: 1200mm
● FBS209	: 1500mm

**Metal Door Flush Bolt**


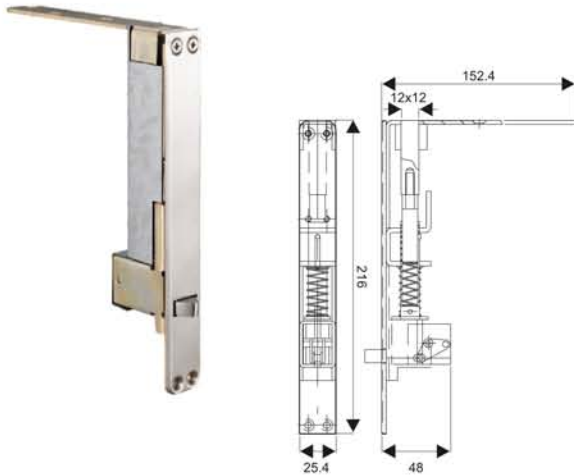
Ref. No.	
● FBS210	: with 200mm rod
● FBS211	: with 300mm rod
● FBS212	: with 450mm rod
● FBS213	: with 600mm rod

**Lever Action Flush Bolt**


Ref. No.	Size
● FBS222	: 200mm
● FBS223	: 300mm

**Dust Excluding Socket**
**DESS200**


**Finish: SSS, PSS, MAB, PB/PVD, BL/PVD**

**Automatic Flush Bolt**

**AFB1901 - Timber doors upto 2700mm H x 1219mm W**

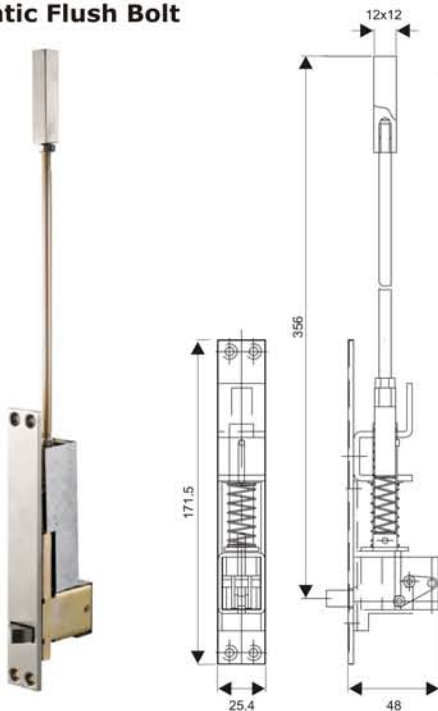
Material : Stainless Steel

Finishes : SSS

Features : • Non-handed.

- Fully automatic—Inactive door is latched when active door closes, bolts retract when active door is opened.
- Override feature prevents damage to doors or bolts if bolt heads are blocked from entering strikes.
- Bolt head rods are adjustable up to 12.50mm

Options: No. 1901 can be used with DESS550 Dust Proof Strike

**Automatic Flush Bolt**

**AFB1801 - Fire-Rated metal doors upto 2700mm H x 1219mm W**

Material : Stainless Steel

Features : • Non-handed.

- Fully automatic—opening active door retracts top and bottom bolts.
- Override feature prevents damage to doors or bolts if bolt heads are blocked from entering strikes.
- Standard rod length - 300mm
- Custom rod lengths available (increment of 150mm)

Options: No. 1801 can be used with the DESS550 Dust Proof Strike

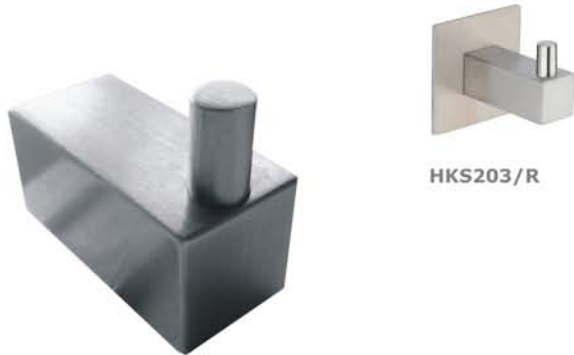
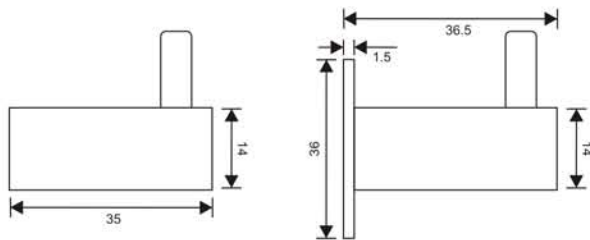
**DESS550 - Dust Proof Strike**

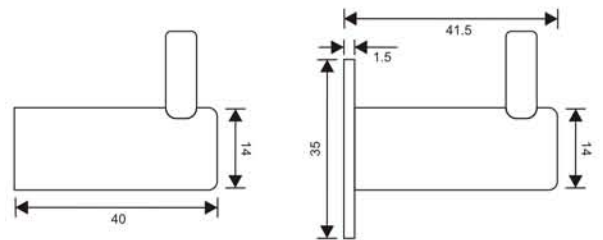
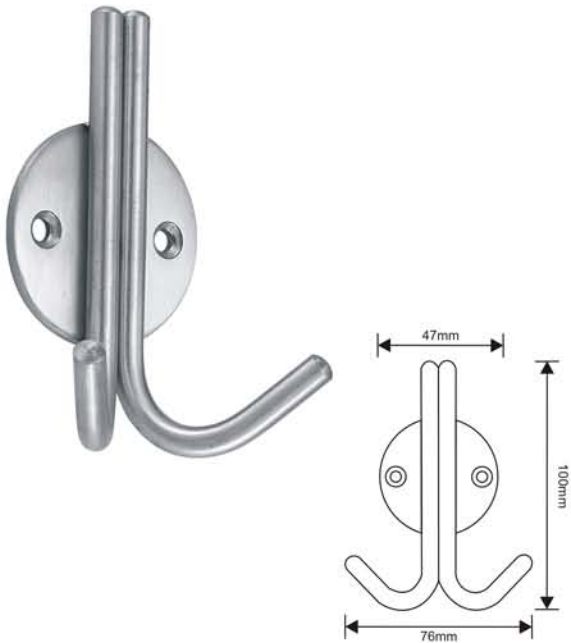
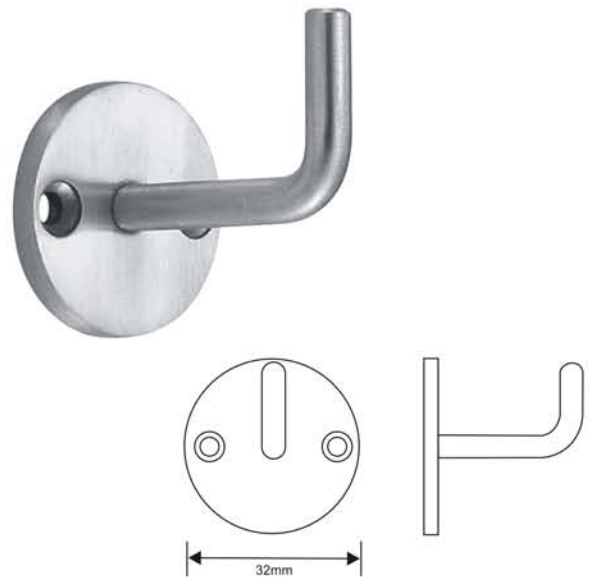

Material : Brass, Stainless Steel

Finishes : SSS

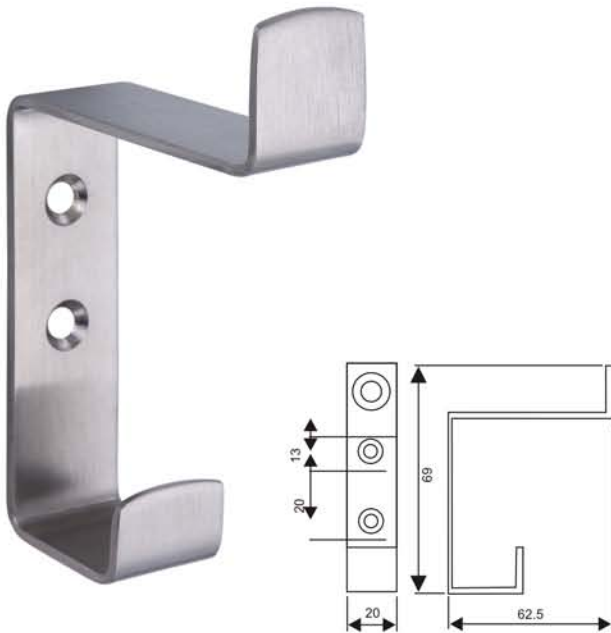
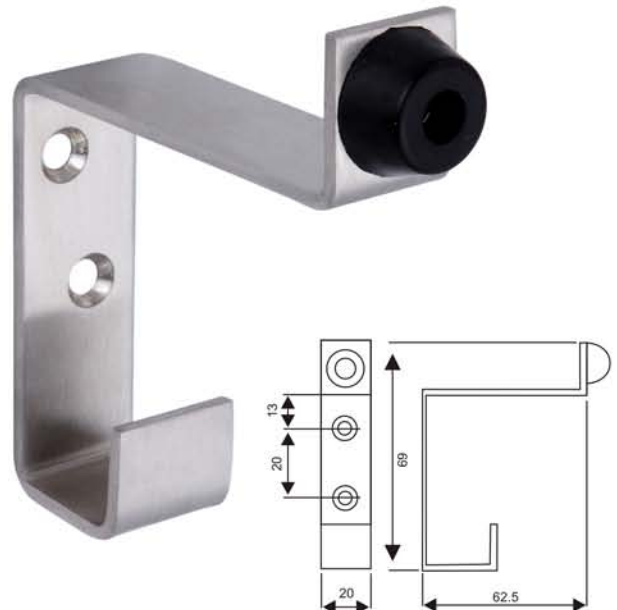
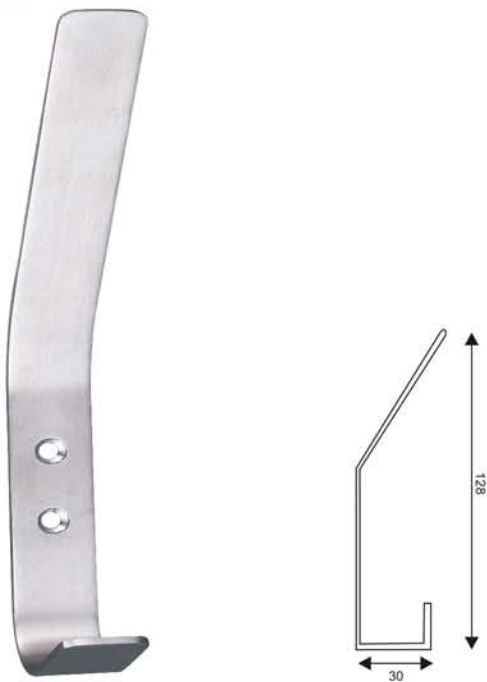
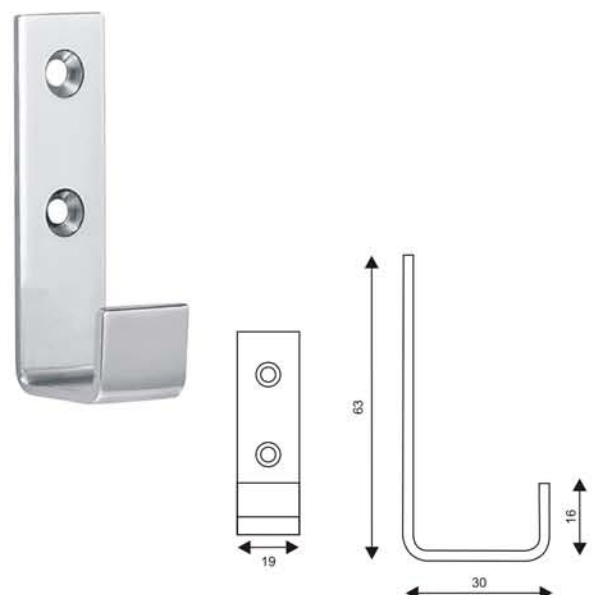
Features : • Spring-loaded plunger depressed when flush bolt is thrown and returns automatically when flush bolt is retracted.



**HKS203**

**HKS203/R**

**HKS207**

**HKS207/R**

**HKS209**

**HKS210**


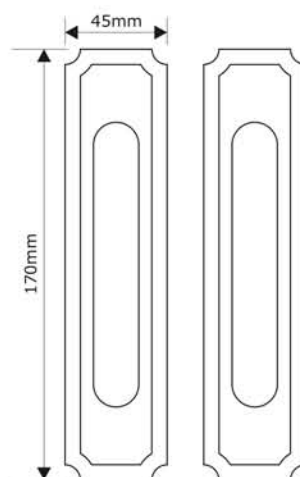
**Finish: SSS, PSS, MAB, PB/PVD, BL/PVD**

**HKS217**

**HKS218**

**HKS221**

**HKS224**


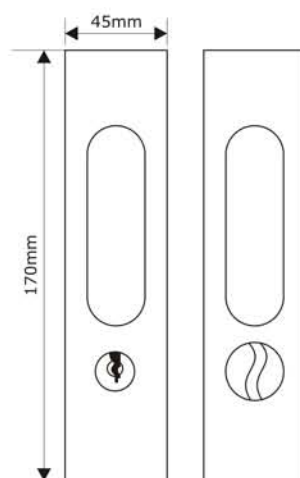
**Finish: SSS, PSS, MAB, PB/PVD, BL/PVD**

**BFP170**

**Gun Metal**

**Bronze**

**HLB170L (with lock)**

**Gun Metal**

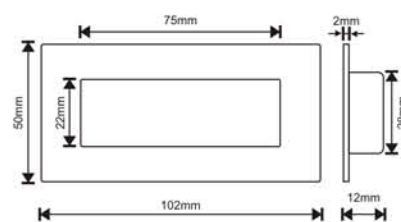
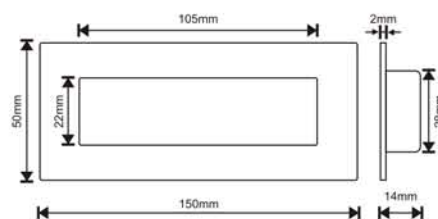
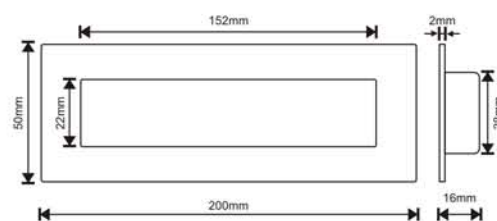
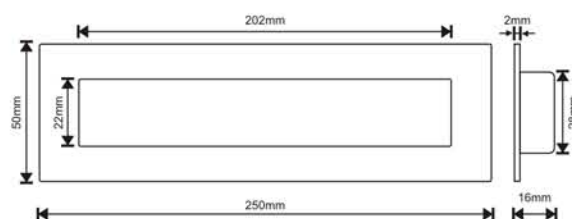
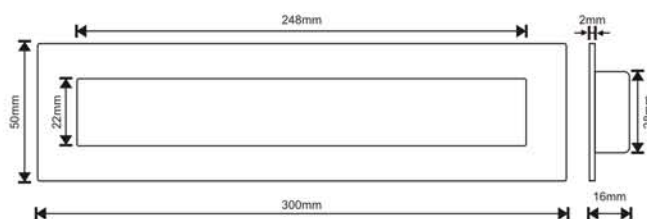
**Bronze**



**BL/PVD**

**SB/PVD**

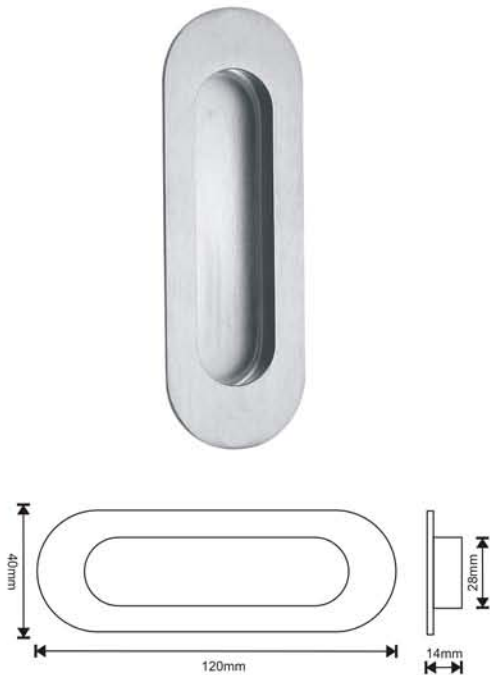
**SSS**

**FPS204** - 102x50mm  
**FPS205** - 150x50mm  
**FPS206** - 200x50mm  
**FPS207** - 250x50mm  
**FPS208** - 300x50mm

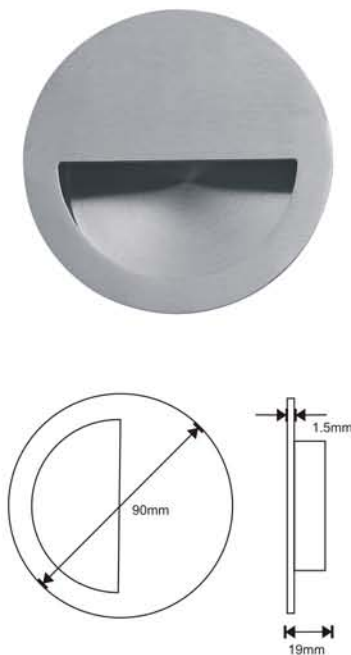
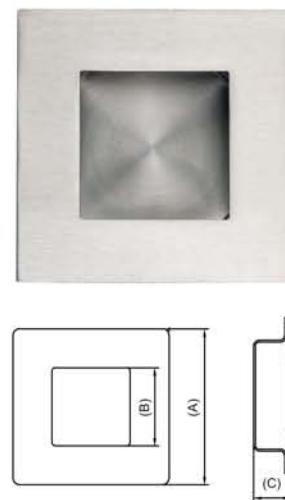

**FPS204**

**FPS205**

**FPS206**

**FPS207**

**FPS208**

**Finish: SSS, PSS, MAB, SB/PVD, PB/PVD, BL/PVD**



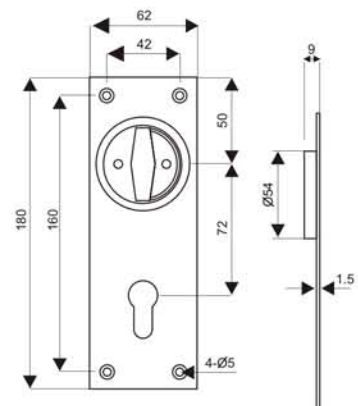
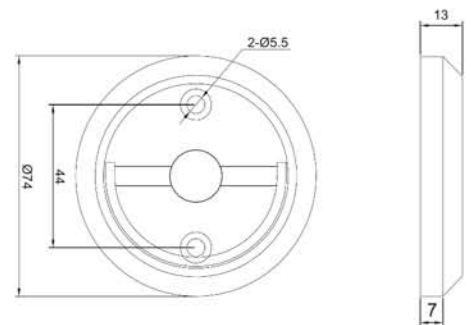
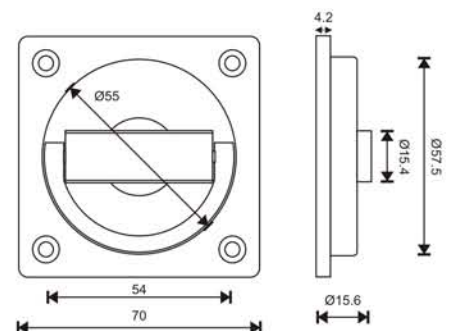
**FPS215**

**FPS230 - 40mm**  
**FPS231 - 70mm**  
**FPS232 - 90mm**


Ref. No.	A	B	C	D
FPS230	40	26	12	1.5
FPS231	70	50	14	1.5
FPS232	90	59	19	1.5

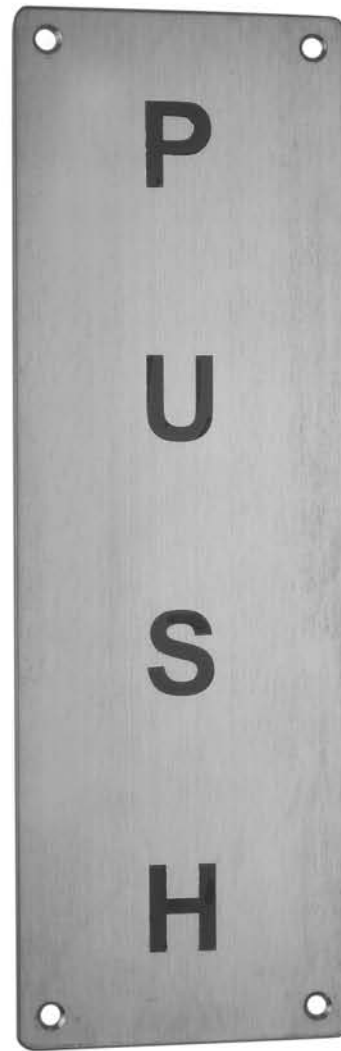
**FPS235**

**FPS260 - 40x40mm**  
**FPS261 - 50x50mm**  
**FPS262 - 70x70mm**


Ref. No.	A	B	C
FPS260	40	20	12
FPS261	50	25	12
FPS262	70	38	14

**Finish: SSS, PSS, MAB, SB/PVD, PB/PVD, BL/PVD**

**FPS245**

**FPS238 - Cup Handle (75mm)**

**FPS239**


**Finish: SSS, PSS, MAB, PB/PVD, BL/PVD**



**Finish: SSS, PSS, MAB, PB/PVD, BL/PVD**

Ref. No.	Size
----------	------

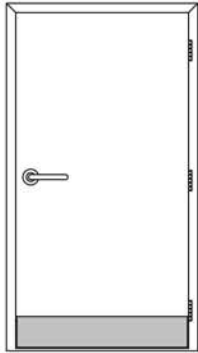
- PFPS205 : 300 x 100mm
- PFPS206 : 350 x 100mm
- PFPS207 : 400 x 100mm
- PFPS208 : 650 x 100mm

Ref. No.	Size
----------	------

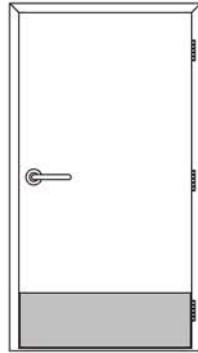
- PFPS209 : 300 x 100mm - PUSH engraved
- PFPS210 : 350 x 100mm - PUSH engraved

## Features

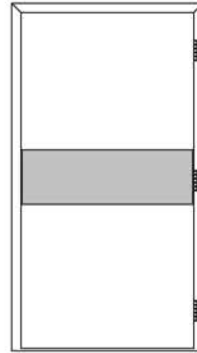
- Push plates are drilled and countersunk as standard with radius corners
- Manufactured from SS Grade 304
- Supplied with SS screws
- All Plates are supplied in 1.5mm thickness as standard
- Other thickness can be supplied to customer's requirement
- Engraved to order
- 2&3mm thickness available on special order



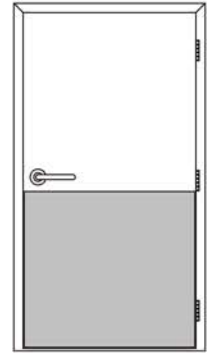
Mop plate



Kick plate



Stretcher plate



Armor plate

**Mop Plate:**

- Protect the bottom of the pull side of door. Recommended height: 150mm

**Kick Plate:**

- Protect the bottom of the push side of door. Recommended height: 200mm

**Stretcher Plate:**

- Protect doors at specific area where regular contact is made by stretchers, trolleys or other equipments. Recommended height: 200mm

**Armor Plate:**

- Protect lower half of doors from abuse by rough use
- Usually applied to push side of single doors and both sides of double action doors. Recommended height: 900mm

**Features:**







- Material: 304 and 316 grade stainless steel
- Thickness: 1.2mm, 1.5mm, 2.0mm
- Width of push plate side: 50mm less than door width, pull side: 37mm less than door width
- Ordering: Specify height x width x thickness
- Supplied with counter sunk mounting holes & stainless steel screws

**G528 - Two Sided**

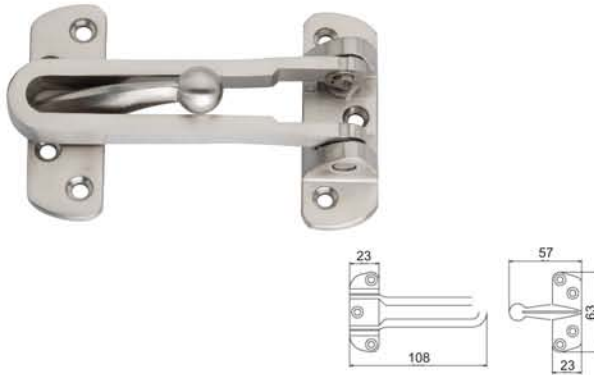
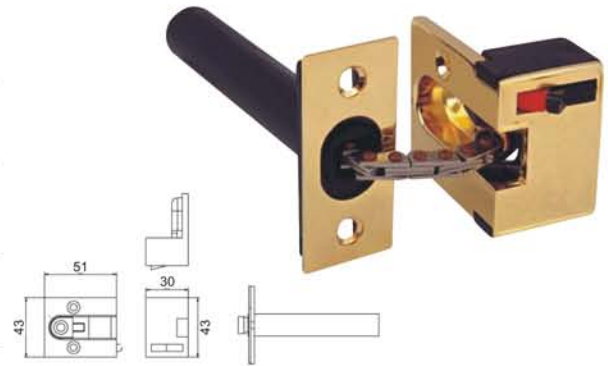
Edge guard protects the door in areas of heavy volumes of pedestrian, trolleys & equipments traffic.



Finish: SSS, PSS

**G528S**  
Square Edged Non-Mortised

**G528B**  
Beveled Edge Non-Mortised

**G528SM**  
Square Edge Mortised

**G528BM**  
Beveled Edge Mortised

**G528SO**  
Square Edge Overlapping

**G528BO**  
Beveled Edge Overlapping




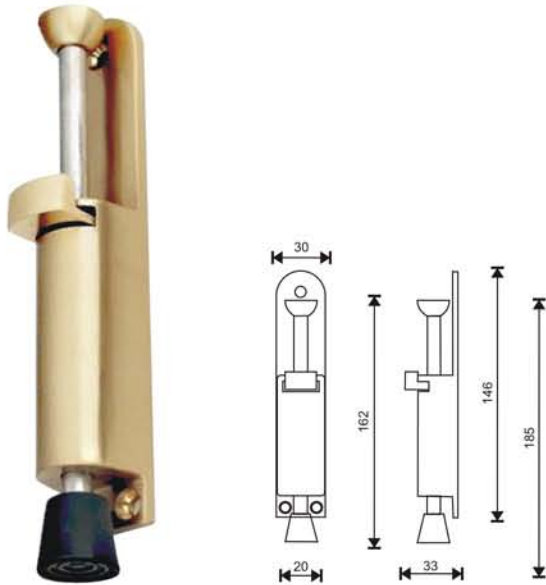
**DGS200 - Stainless Steel Door Guard**

**DGS201 - SS Concealed Door Chain**

**DCS203 - SS Door Chain with Leather Cover**

**DCS205 - Stainless Steel Door Chain**

**DCS207/L Sliding Security Lock**

**DCS207/S Sliding Security Lock**


**Finish: SSS, PSS, MAB, PB/PVD, SB/PVD, BL/PVD, MBL**

**DSS320 - SS Foot Operated Door Holder**


Finish: SSS, PSS, PB, MAB

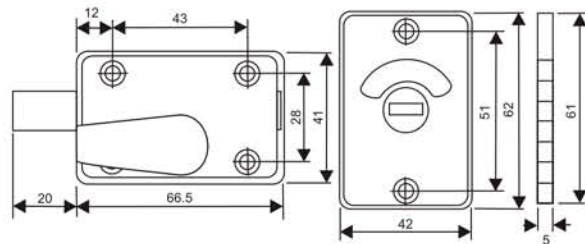
**Door Silencers**


DS308



DS309

- DS308 : For metal frames
- DS309 : For timber frames
- Material : Duraflex grey rubber

**IBS200 - Stainless Steel Indicator Bolt**


Finish: SSS, PSS, PB, MAB

**Double Ball Catch**

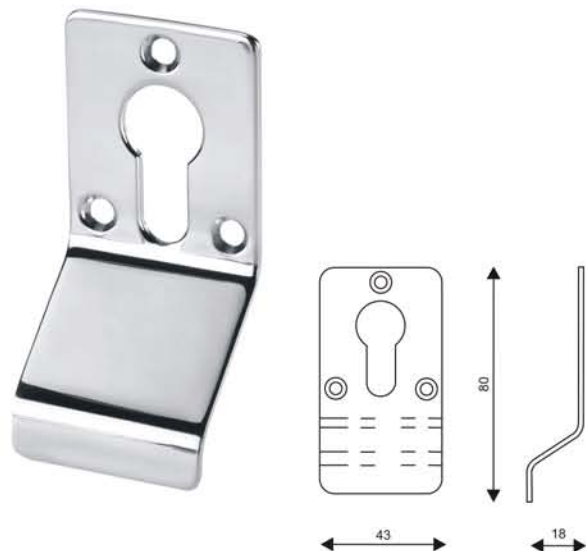
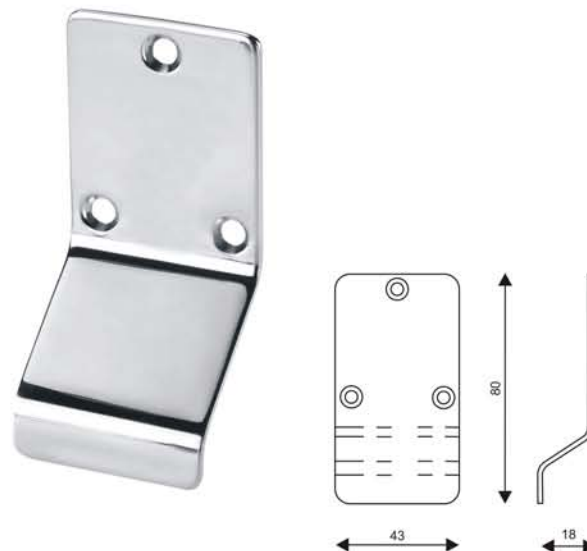

Finish: CP, PB, SN

Ref. No.	Size
• BCD243	: 43mm
• BCD250	: 50mm
• BCD260	: 60mm
• BCD270	: 70mm
• BCD275	: 75mm

**Single Ball Catch**


Finish: CP, PB, SN

Ref. No.	Size
• BCD235	: 35mm
• BCD238	: 38mm
• BCD253	: 53mm
• BCD285	: 85mm

**CPS202 - Euro Profile Cylinder Pull**

**CPS204 - Blank Cylinder Pull**


**Finish: SSS, PSS, MAB, PB/PVD, BL/PVD**


**Door Viewer**

**DV101** - Viewing Angle 180° (14mm dia), 26mm lens (for 35-60mm door thickness)


**DV102** - Viewing Angle 200° (16mm dia), 30mm lens (for 35-60mm door thickness)

**DV103** - Viewing Angle 180° (14mm dia), 26mm lens (for 60-80mm door thickness)


- With Glass lens
- Manufactured from brass
- With optional cover



DV101



DV102



DV103



PC



MBL



SN



MAB



PB

**Finish: SN, PC, PB, MAB, MBL**



**Circular Signage - 76mm diameter**


**SIGN201**  
Unisex Symbol



**SIGN203**  
Female Symbol



**SIGN202**  
Male Symbol



**SIGN204**  
Disabled Symbol



**SIGN211**  
Baby Change



**SIGN212**  
Fire Door Keep Shut



**SIGN213**  
Fire Door Keep Clear



**SIGN214**  
Fire Door Keep Locked

**Rectangular Signage - 150 x 100mm**


**SIGN205**  
Female Symbol



**SIGN206**  
Male Symbol



**SIGN207**  
Disabled Symbol

**Finish: SSS, PSS, PB, MAB**



## Doors Sliding System

EuroArt design, develop and supply fittings, hardware systems and mechanisms for top quality sliding, folding and articulated systems for all types of applications. We focus on achieving maximum optimization of space with a wide range of systems suitable for all architectural needs



### Why choose sliding doors?

They are perfect for optimising space and boosting light levels. Sliding doors can seem to play tricks on you as they appear to alter the dimensions of the spaces: making rooms seem bigger or smaller.

There are infinite reasons to choose sliding doors for your homes, offices, shops. EuroArt are here to give you 8:

1. They brighten up a space
2. They help you use your space more efficiently
3. They can bring rooms together
4. And they can separate rooms too
5. They are versatile
6. They blend into their environment
7. They are safe
8. They provide a touch of elegance




## EASF-90


### Features:

- Door height: Max 2400mm
- Door thickness: Min 27mm, Max 45mm
- Available with single & double soft close as option
- Track available in: silver & matt black

### Specification:



**1 Softbrake**  
MIN. 600 mm  
**2 Softbrakes**  
MIN. 825 mm



MIN. 27 mm



BALL BEARING





SOFTBRAKE  
MÁX.90Kg

### Weight:



Item no.	Description
008100	Without Soft Close
098191	With Single Soft Close
098190	With Double Soft Close

**Top Track:** Available in 2m, 3m, 5m length

Item no.	Top Track	
  33x32,3mm	008223	2 Meter
	008233	3 Meter
	008253	5 Meter



## EASF-88D & EASF-128D

### Features:

- Door height: Max 2400mm
- Door width:  
Min 1000mm/ 2 panel, Max 750mm / 4 panel
- Door thickness: 35 - 50mm

### Specification:



MIN. 35 mm  
MAX. 50 mm



MAX. 1000 mm  
2 PANELS



MAX. 750 mm  
4 PANELS



MAX. 2400 mm



Ball  
Bearing





### Installation Possibilities:



SF-A88D (80kg.) and SF-128D (120kg.) are system for sliding folding hinged doors without bottom profile. A property that allows obstacle-free passage once the door are opened, making it an ideal system for interior dividers. The system allows to close space upto 6m with panel of same size, without lower profile.

Item no.	Description
EASF-88D	80kg Folding Sliding System
EASF-128D	120kg Folding Sliding System

**Track:** Available in 2m, 3m, 5m length

Item no.	Description
  33x32mm	Top Track, Ceiling mount 80kg
  53x32mm	FT Top Track for False Ceiling 80kg






## EASF-P140


### Features:

- Track available in: silver & matt black.
- Door height: Max 3000mm.
- Door Weight: Max. 140 Kg.


### Specification:



MÍN. 600 mm



**SoftTop**  
MÍN. 800 mm



MÍN. 35 mm





RODAMIENTO A BOLAS  
BALL BEARING  
ROULEMENT À BILLES



**SoftTop**  
MÁX. 140Kg





- Wall or ceiling mount, or false ceiling concealed track for an entirely minimalist design.
- Efficient and easy installation thanks to the Support FT XL (false ceiling) track, allowing to remove the sliding top track, making possible installation in phases. It also provides direct access to the mechanisms, to install and disassemble at any stage even after construction, either to incorporate additional components or to replace them, without the need to make modifications to the false ceiling.
- Separator wall mounting track designed to optimize and reduce installation time.
- Absence of a bottom track (optional) to create passage areas free of obstacles.

Item No.	Description
P140 (01400)	with double soft close
P140 (014001)	with single soft close

Item no.	Star XL track 140kg	
  40x46 mm	016036	3 Meter
	016046	4 Meter
	016066	6 Meter



## ADB349

<b>CATEGORY :</b>	Automatic Door Bottoms
<b>ANSI Number :</b>	R3C325
<b>FINISHES :</b>	Mill Aluminum
<b>LENGTH :</b>	18" to 72" (457 to 1829mm)
<b>DIMENSIONS :</b>	19/32" (14.6 mm) W x 1-3/8" (34.9 mm) H
<b>CROSS REFERENCE :</b>	Pemko:411, NGP:225, Zero:320, Lorient:IS8005
<b>RATINGS :</b>	   

**OVERVIEW:** Auto Door Bottom are made from extruded aluminum combined with sponge neoprene and is activated when a plunger depresses against the door stop or jamb sealing out clearance between door bottom and floor line.

### FEATURES:

- Manufactured to BHMA A156.22 standards.
- The rubber seal in the gasket provides protection from fire and smoke infiltration in accordance with provisions of NFPA101 Life Safety and NFPA80, Standard for Fire Doors and other opening protectives.
- ASTM E-283 for Air Infiltration.
- ASTM E-90-97 and ASTM E1408-91 for Sound Control.
- The seal activates from the hinge side first allowing multiple compression points.
- Reversible for right or left hand installations.
- Construction Grade Alloy 6063-TS guarantees the product to last through many usages.

### BENEFITS:

- The Auto Door Bottom is fully concealed as it's installed into a notch on the under side of door. The Auto Door Bottom is hidden and does not affect appearance of door.
- The seal drops only when door is in closed position which helps to protect floor surface and prevents the seal from wearing out quickly.
- Creates a strong reliable barrier for fire, smoke, sound, air infiltration, drafts light and dust.
- End plates are available for both ends in matching finish.
- Can be shortened upto 2"(51mm) from lock side.
- Seals upto a 3/4"(19mm) gap under the door.


**APPLICATIONS:** The concealed aspect of this Auto Door Bottom is good for doors which are required to retain their clean, unobtrusive look. The Auto Door Bottom is highly recommended on below doors to prevent air, light, sound, fire, smoke, dust, moisture and insects from infiltrating through the gap under doors.

- Guest room in Hotels.
- Main entrance of Apartments and Villas.
- School and University.
- Hospitals, Nursing Facilities.
- Offices, Government buildings and more!!

The Auto Door Bottom can be applied directly above the floor surface. However for a superior seal, a threshold is recommended.

**Ordering Example: ADB349 | 36** (Length)

### PROFILE DRAWING



### PHOTO



All mortised ironmongery must be fitted in a way ensuring the fire rated properties of a door are not compromised. It is compulsory that ironmongery is bedded in intumescent material.

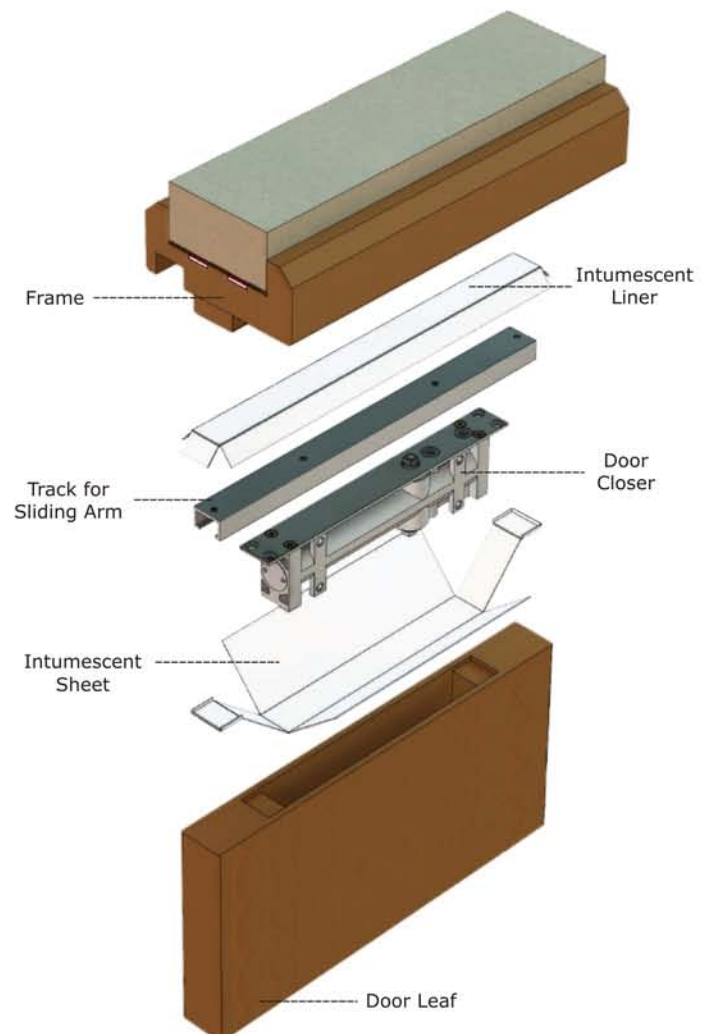
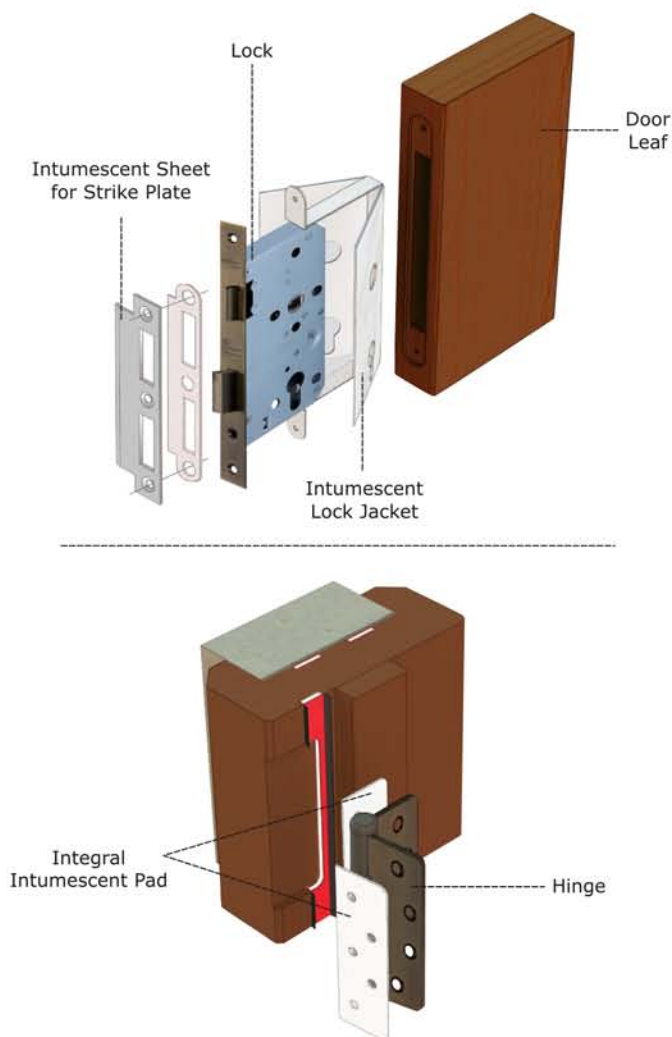
EuroArt offers a range of kits designed for use with hinges, locks and concealed door closers. When exposed to fire, intumescent kits rapidly produced a large quantity of micro porous heat insulating foam which protects timber from the heat.

Intumescent kits are supplied in thickness of 1mm and 2mm.

**Ref. No.**

- **IH/1mm:** Intumescent Hinge Pad
- **IH/2mm:** Intumescent Hinge Pad
- **IL/1mm:** Intumescent Lock Kit
- **IL/2mm:** Intumescent Lock Kit
- **IC/1mm:** Intumescent Door Closer Kit
- **IC/2mm:** Intumescent Door Closer Kit
- **IF/1mm:** Intumescent Flush Bolt Kit
- **IE/2mm:** Intumescent Door Viewer Kit

Add EuroArt Product code to above Ref no. when ordering.





## Spindles

To fit handles safely and achieve optimum performance please ensure spindles are fitted at least 20 to 25mm into the lever

### SSP8-108



Standard Spindle  
8 x 108mm

### SSP8-125



Long Spindle  
8 x 125mm

### HSP101



Half Spindle to operate  
Front Fix

### HSP102



Half Spindle to operate  
Rear Fix

### SSP100



Split Spindle  
8 x 100mm

### BTS100



Break Through Spindle  
8 x 100mm

### TS35



Taylor Spindle  
8 x 35mm

### MSA5-8



Spindle Adapter (Metal)  
5 - 8mm

### BTFPH60 M8x60mm BTFPH90 M8x90mm



Bolt Through Fixing for  
Pull Handle-M8 x 60mm

### TDS



SS Screw to Suit Hinges  
for Timber Doors

### MDS



SS Screw to Suit Hinges  
for Metal Doors

### BCF16 BCF19 BCF22 BCF25 BCF32



Bolt Cap Fixing Pack for  
16, 19, 22, 25 & 32mm  
Pull Handles

## Rebate Kit for DLA Series





#### **Sales Office**

Euro Art (UK) LTD.  
69 Staverton Road, London  
NW2 5HA

#### **Warehouse**

Brittania Mills Didsbury Street  
Blackburn Lancashire, BB1 3JL  
United Kingdom

T.: +44 1254 433883  
M.: +44 787 565 1180  
E.: [uk@euro-art.co.uk](mailto:uk@euro-art.co.uk)

#### **Oman Sales Office**

Al Ghala, Muscat  
T.: +968 24 117 173  
M.: +968 77 027 925  
E.: [oman@euro-art.co.uk](mailto:oman@euro-art.co.uk)

#### **Middle East, Asia & Africa**

Euro Art (Middle East) FZCO  
Warehouse ZE4  
Jebel Ali Free Zone  
Dubai, UAE

T.: +971 4 888 6345  
M.: +971 50 297 9761  
E.: [me@euro-art.co.uk](mailto:me@euro-art.co.uk)

#### **UAE Distribution Center**

Mobility General Trading LLC  
Industrial Area, Behind Al Khail  
Mall, Al Quoz  
Dubai, UAE

T.: +971 4 269 3832  
M.: +971 50 811 9561  
E.: [sc@euro-art.co.uk](mailto:sc@euro-art.co.uk)

#### **Design Centers**

Dubai: Airport Road  
T.: +971 4 295 1105  
M.: +971 54 990 7059  
E.: [me@euro-art.co.uk](mailto:me@euro-art.co.uk)

Abu Dhabi: Najda Street  
T.: +971 2 564 7111  
M.: +971 50 209 9786  
E.: [ad@euro-art.co.uk](mailto:ad@euro-art.co.uk)

Doha: Barwa Village  
T.: +974 4 490 7530  
M.: +974 7 733 5728  
E.: [qatar@euro-art.co.uk](mailto:qatar@euro-art.co.uk)

[www.euro-art.co.uk](http://www.euro-art.co.uk)