




LED Lighting Solution

For Commercial & Residential

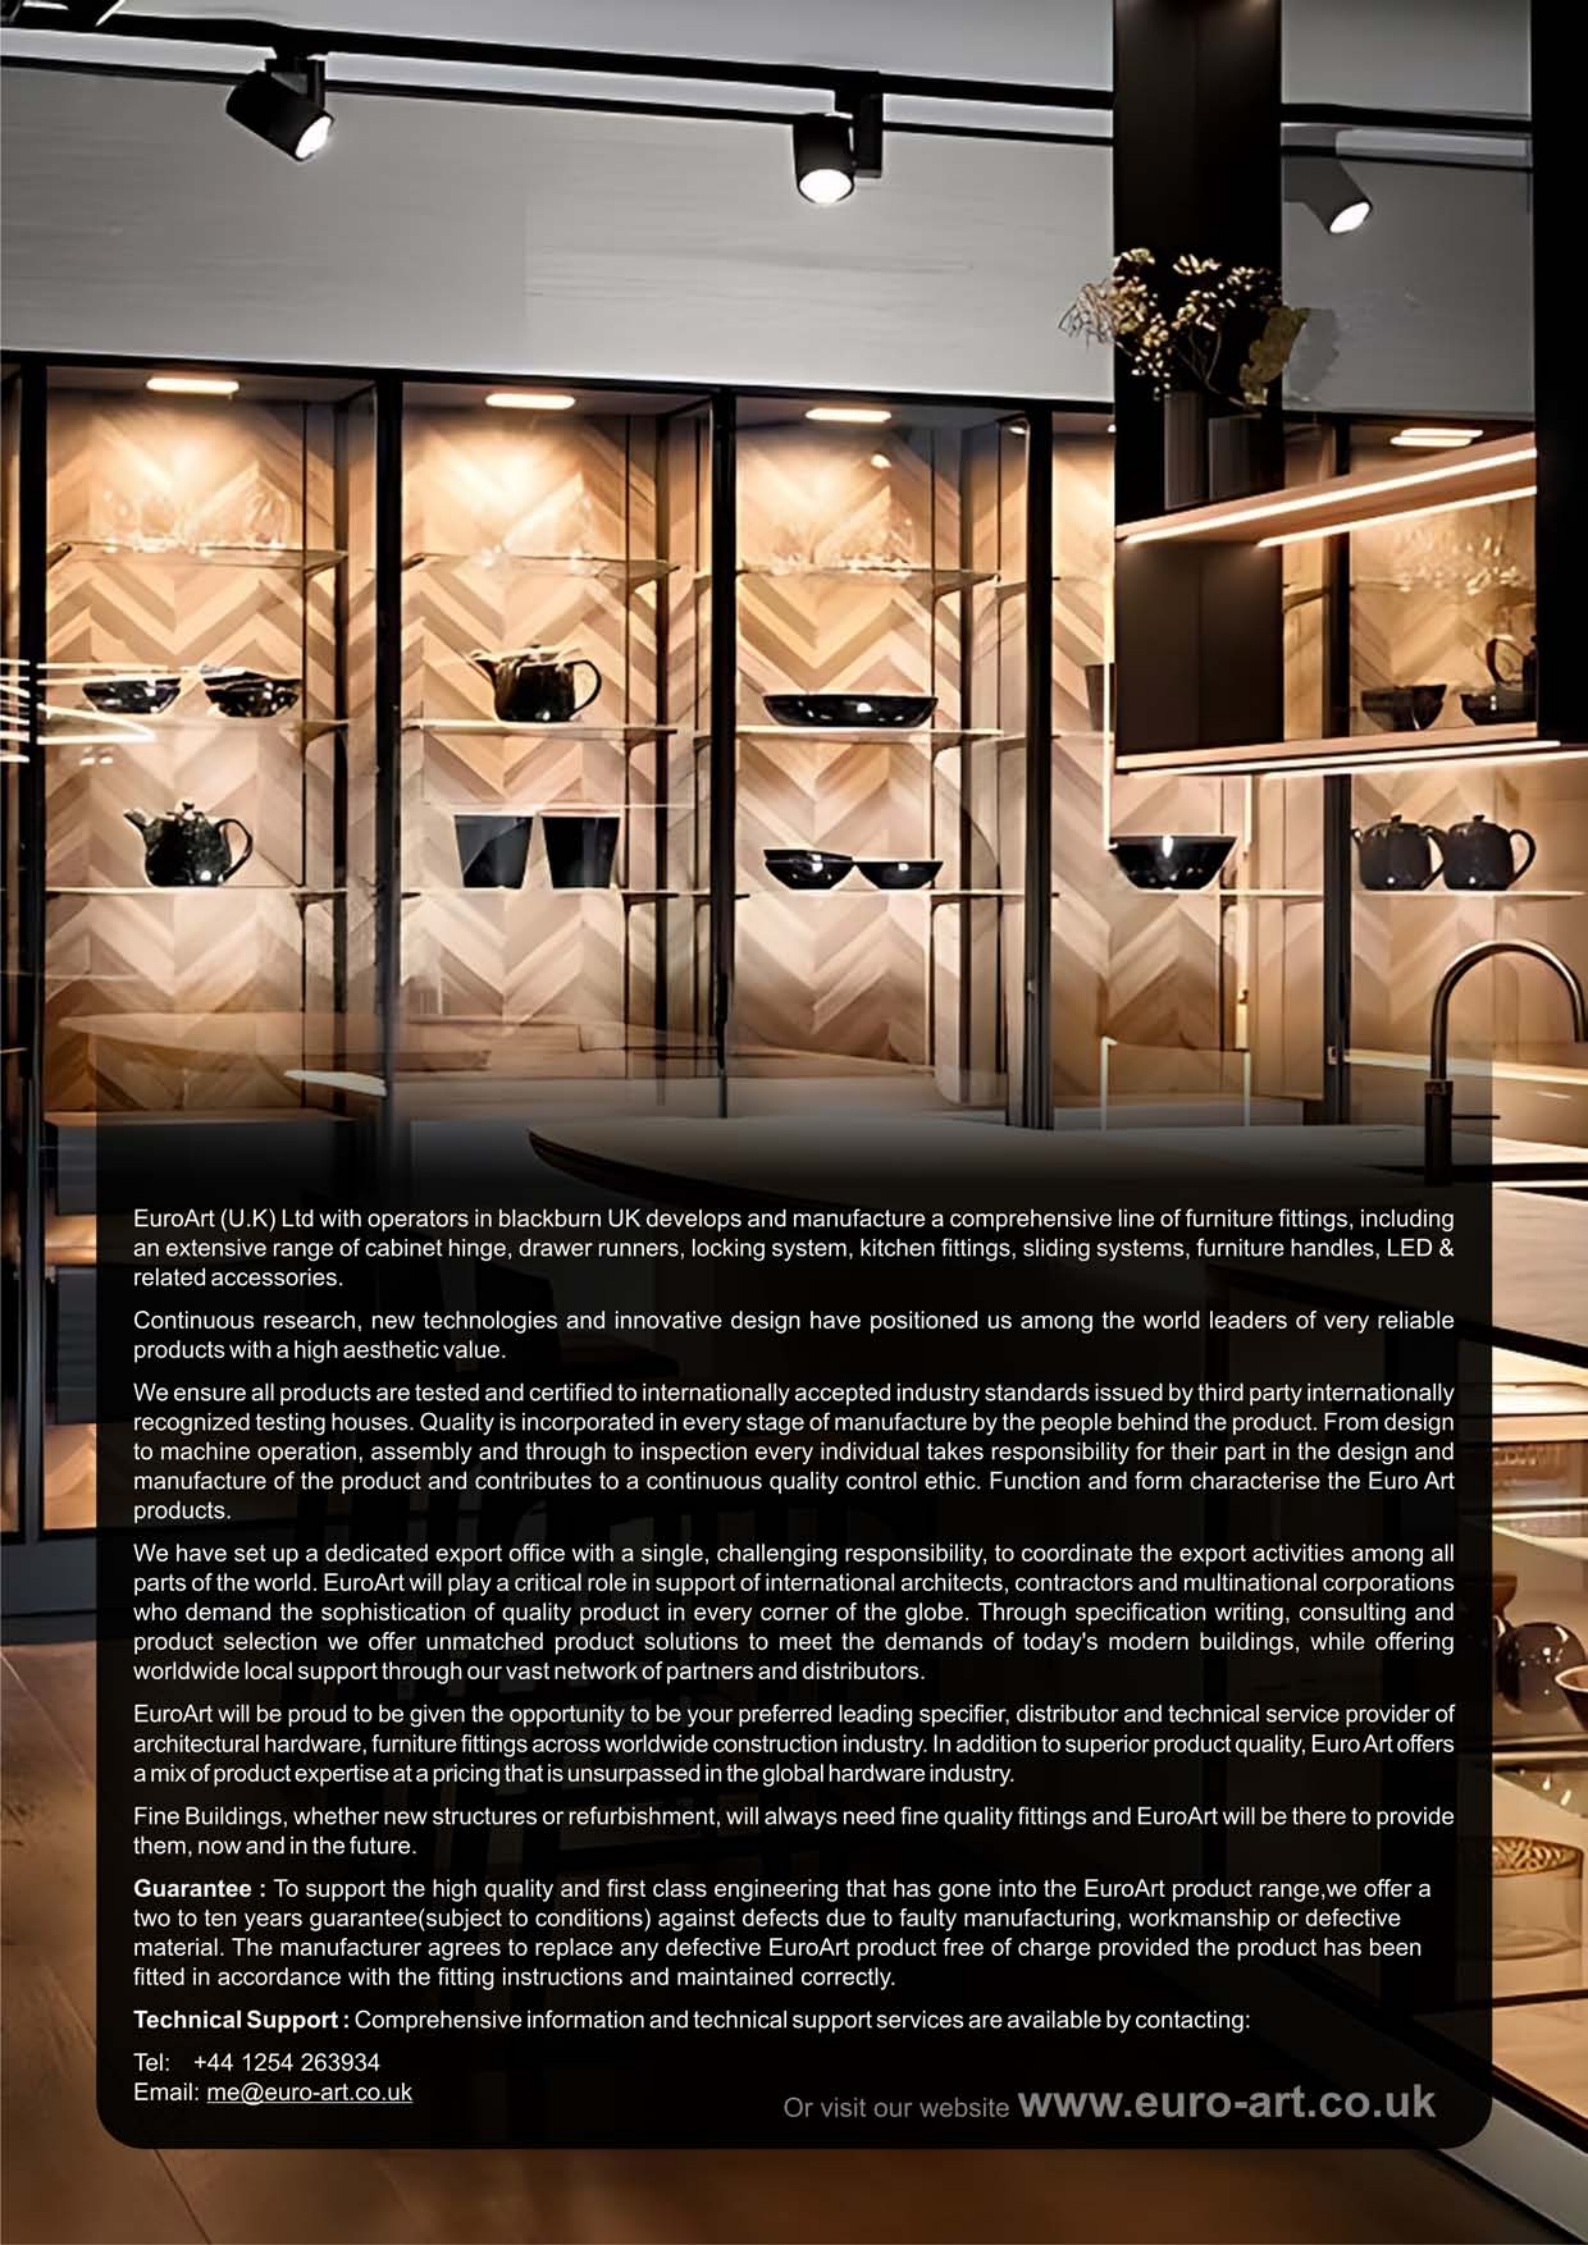

EuroArt (U.K) Ltd with operators in Blackburn UK develops and manufacture a comprehensive line of furniture fittings, including an extensive range of cabinet hinge, drawer runners, locking system, kitchen fittings, sliding systems, furniture handles, LED & related accessories.

Continuous research, new technologies and innovative design have positioned us among the world leaders of very reliable products with a high aesthetic value.

We ensure all products are tested and certified to internationally accepted industry standards issued by third party internationally recognized testing houses. Quality is incorporated in every stage of manufacture by the people behind the product. From design to machine operation, assembly and through to inspection every individual takes responsibility for their part in the design and manufacture of the product and contributes to a continuous quality control ethic. Function and form characterise the Euro Art products.

We have set up a dedicated export office with a single, challenging responsibility, to coordinate the export activities among all parts of the world. EuroArt will play a critical role in support of international architects, contractors and multinational corporations who demand the sophistication of quality product in every corner of the globe. Through specification writing, consulting and product selection we offer unmatched product solutions to meet the demands of today's modern buildings, while offering worldwide local support through our vast network of partners and distributors.

EuroArt will be proud to be given the opportunity to be your preferred leading specifier, distributor and technical service provider of architectural hardware, furniture fittings across worldwide construction industry. In addition to superior product quality, Euro Art offers a mix of product expertise at a pricing that is unsurpassed in the global hardware industry.

Fine Buildings, whether new structures or refurbishment, will always need fine quality fittings and EuroArt will be there to provide them, now and in the future.

Guarantee : To support the high quality and first class engineering that has gone into the EuroArt product range, we offer a two to ten years guarantee (subject to conditions) against defects due to faulty manufacturing, workmanship or defective material. The manufacturer agrees to replace any defective EuroArt product free of charge provided the product has been fitted in accordance with the fitting instructions and maintained correctly.

Technical Support : Comprehensive information and technical support services are available by contacting:

Tel: +44 1254 263934

Email: me@euro-art.co.uk

Or visit our website www.euro-art.co.uk





Malcolm Brown
Honorary Chairman



Dear Patrons,

After many months of development, it is with great emotion and pleasure, that I am introducing our new extended range of furniture fittings. Our team has worked with renewed focus and energy to improve our market share, reduce our cost base, streamline the supply chain and ensure launch of products on time to delight our customers.

After successfully supplying cabinet hinges, drawer runners, pulls, locks etc in UK market for many years, we have added LED, popup sockets, kitchen fittings & accessories to act as a single source supplier of all your furniture fitting & joinery requirements. We believe it would suit your needs greatly and deliver as per your requirement.

The catalog comes in much handier format and is structured clearly to help you find the fitting you are looking for - easier and faster. You will find a lot of new and interesting fitting and accessories in this catalog. We ensure all products are superior quality and are tested to meet high standards of third party certifications (SGS, RoHS, TUV, CE).

Euroart is committed to investments in new technologies to develop products that meet the challenges and opportunities of the growing market, including developing sustainable technologies. Euroart monitors quality performance and implements corrections to improve product performance, thereby improving customer satisfaction.

I would like to thank our employees as well as our extended partners, including dealers, OEM companies and other stakeholders for their hard work and commitment in this growing phase of Euroart. With already dominant market position across United Arab Emirates, Bahrain, Oman, Kuwait, Qatar etc, Euroart is growing market share across Africa, Saudi Arabia, Bangladesh & Sri Lanka.

In conclusion, I would say that we have immense opportunities, and we are optimistic about the new range of Euroart. We are always open for suggestions, ideas, help and are committed to a continuous development program.


Looking forward to your continued support, as we put in our best to meet your expectations!

Warmest Regards,

Malcolm Brown
Honorary Chairman
EuroArt UK



Global Presence

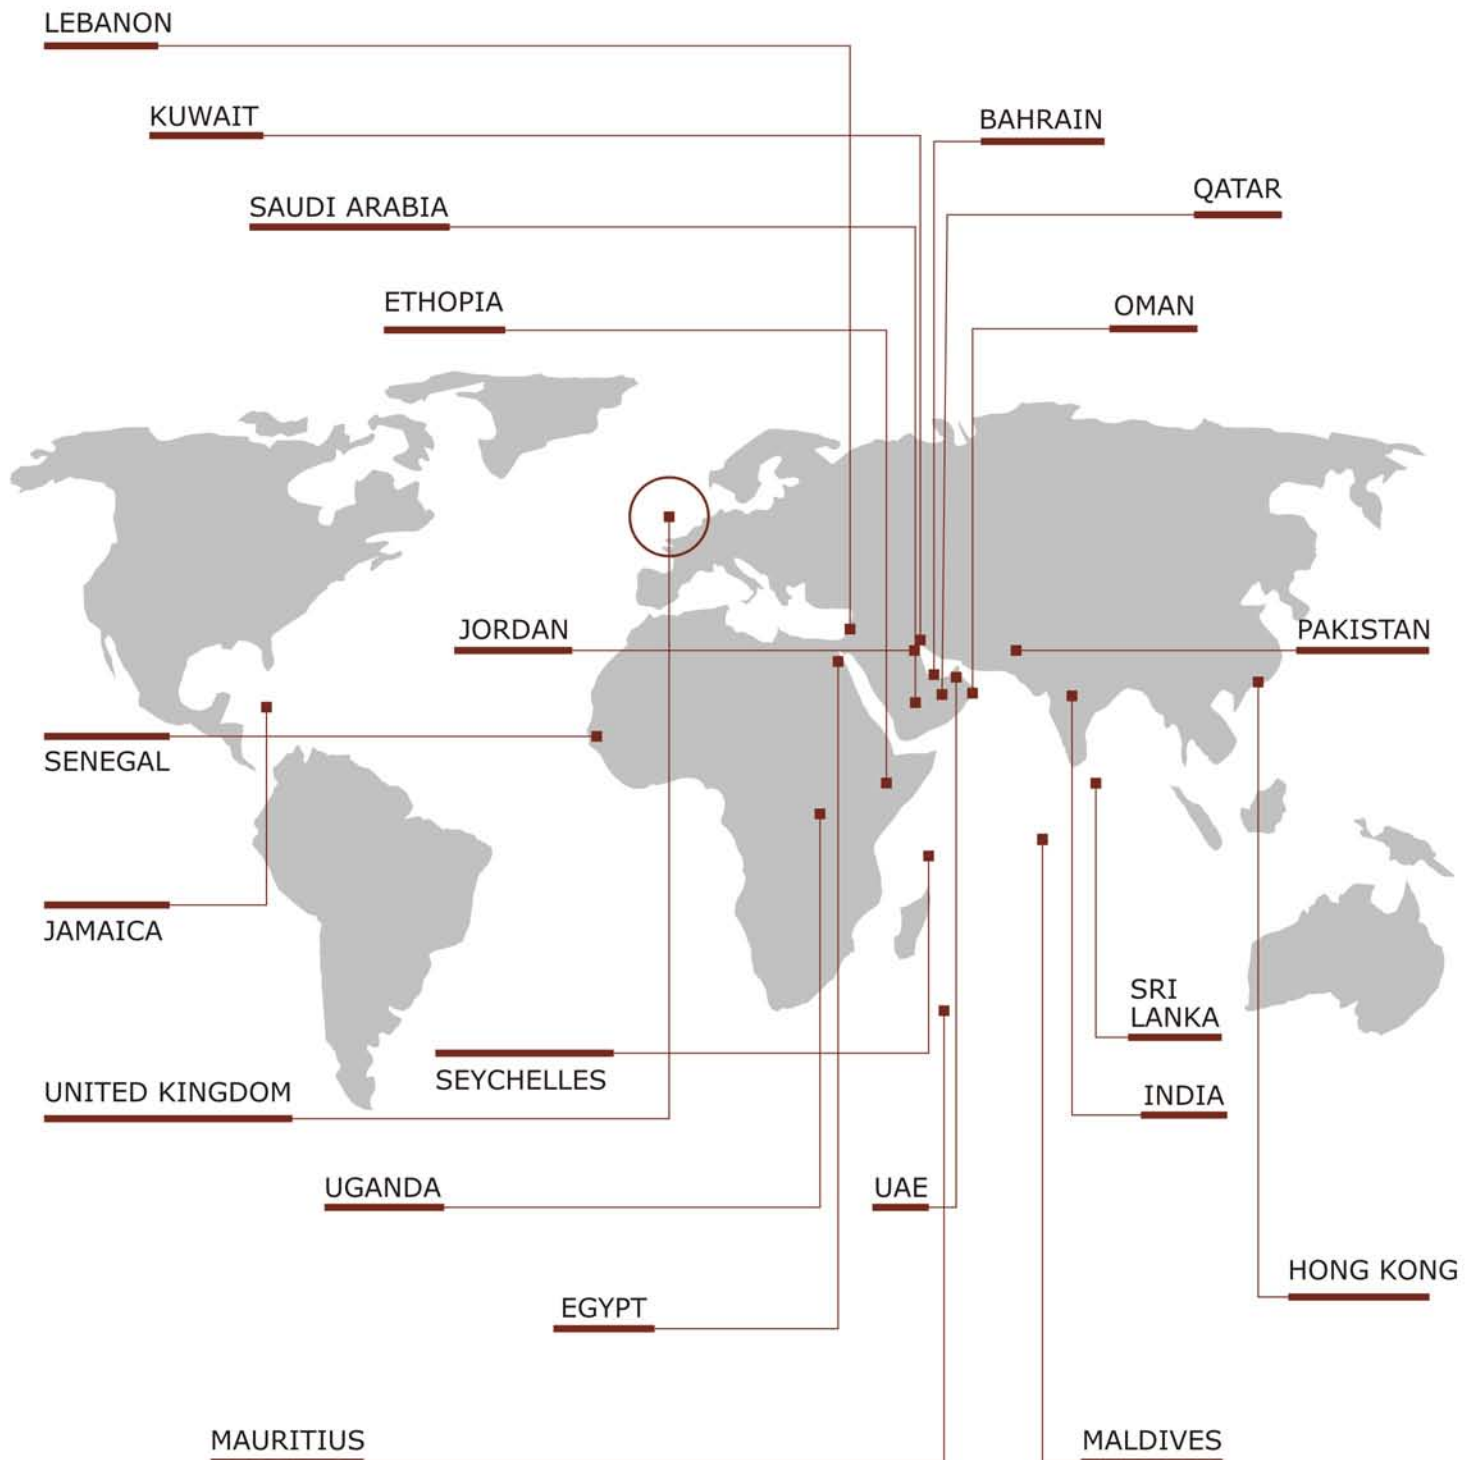

EuroArt has two main distribution hubs - Blackburn, UK and Jebel Ali Dubai, UAE.

Blackburn, UK distribution center caters the european market where as Jebel Ali, UAE distribution center manages Middle East, Asia and Africa.

Our strong logistics helps us build worldwide presence by managing the supply chain flow from our factories to warehouses and to reach the final consumer.



Quality and Tested Production

EuroArt's Product development team works on three fundamental principles – knowledge, tools, and systematic process for conceptualizing. We are striving constantly to push our boundaries forward. We try to control costs and improve quality by applying zero-defect and efficiency-focused techniques. We believe that the process of designing products is profoundly different from the process of making them. EuroArt learns from whole system to bring best quality fitting for its customers.

Training and Development

Training is a prime opportunity to expand the knowledge base of all employees. Training and development provide the individuals and organizations with different benefits such as improved employee performance and increased employee satisfaction and morale. It addresses the weaknesses of employees and the organization, increases productivity, brings innovation, reduces employee turnover, and enhances company efficiency and profile.

EuroArt gives utmost importance to staff training and continuous development at the workplace, enabling EuroArt staff who are qualified GAI, AHC and FDAI and FF&E experts to maintain their knowledge of industry standards and regulations.



THE ABC: OF LIGHTING TECHNOLOGY.

LED's (Light Emitting Diodes) can vary the properties of the light that is generated, and generate almost the entire colour spectrum. Unlike normal light bulbs and halogen lamps, LED's generate little heat. They use less energy and have a long service life.

ADVANTAGES OF LED'S

Long lasting

LED lights have an extremely long service life of up to 25 years or more than 40,000 to 50,000 hours.

Robust

LED's have an extremely small and robust design. This makes handling easier during furniture construction and transport.

Low heat generation

Because of their extremely low power consumption, LED lights generate hardly any heat. This means that LED lighting systems are particularly suitable for displays and furniture.

Energy-saving

LED lights use an impressive 90 percent less power than conventional light bulbs! This means that they can be used to implement modern lighting scenarios in furniture, and still be in line with the energy saving trend.

Powerful

Modern LED lights are bright and have a saturated light colour. They achieve full brightness instantly when they are switched on. LED furniture lighting therefore has a lasting effect at the push of a button.

Rich in variants

LED lights are available in different colours, and can be designed as colour changing lights. This allows the light colour to be coordinated with furniture contents such as exhibits in the best possible way.

LED technology

Drivers
12V

Spoiled for choice in the 12 V system

The LED lights are voltage-controlled and connected in parallel in the 12 V system. The plugs on the driver can be freely allocated. 12 V lights are the most widespread at present.

Drivers
24V

Powerful 24 V system

Technically speaking, the 24 V system is identical to the 12 V system, but has a considerably higher power level. 24 V lights can therefore be used when extremely bright lights are required.

Drivers
350mA


Spotlights in the 350 mA system

The LED lights in the 350 mA system are current-controlled and connected in series. This means that each plug has to be either occupied or bypassed. 350 mA lights provide extremely high light power and are particularly suitable for spotlighting.

Drivers
700mA

Spotlights in the 700 mA system

700 mA system is the same as 350 mA system. The LED lights in the 700 mA system are current controlled and connected in series. Hence in the same way the plugs are to be preoccupied or bypassed. The 700 mA lights are high powered and suitable for spot lighting.

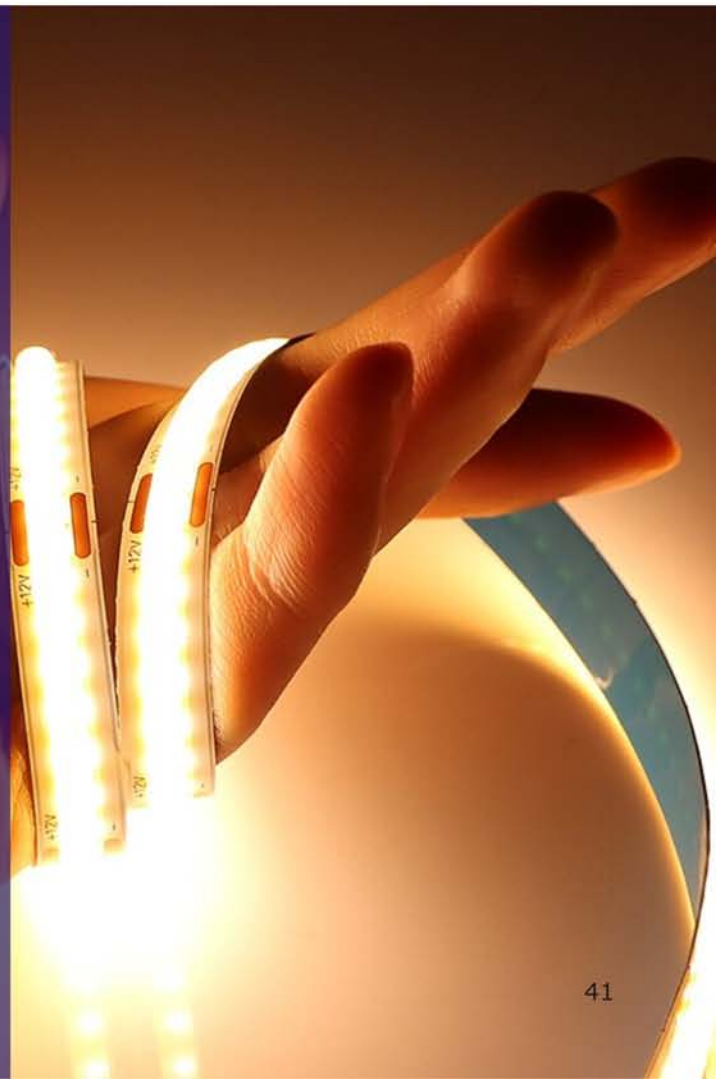

Polycarbonate Diffuser _____

Aluminium Profile _____

LED Strip Light _____

SYMBOLS AND TERMS



Technical Control Board

RoHS

Restriction of Hazardous Substances



Electrical Testing Labs (CAN/USA)



Furniture installation symbol



Suitable for directly mounting to standard inflammable surfaces



Motion detector



Dimmable



Do not use components that impede thermal radiation




Lights to be used indoors only.
Not to be used outdoors!



Water Tolerant

Water Tolerant



IP65 after installation



IP44 after installation



European Safety Standard

IP20

Only for use in dry locations

IP44

Protected against solid foreign objects
Ø1 mm and larger and splash water

IP65

Protected from water jets by a nozzle
6.3 mm (1/4") from any angle


IP67

Protected for the under water




Protection class 3


1. EuroArt 2 pin controller lighting solution

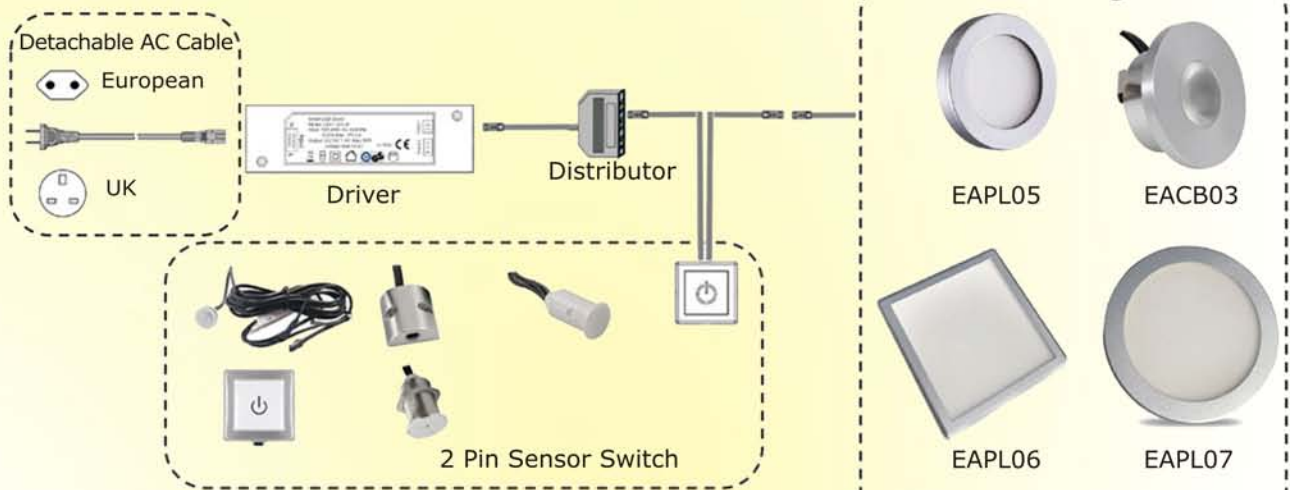


2. EuroArt 3 pin controller lighting solution

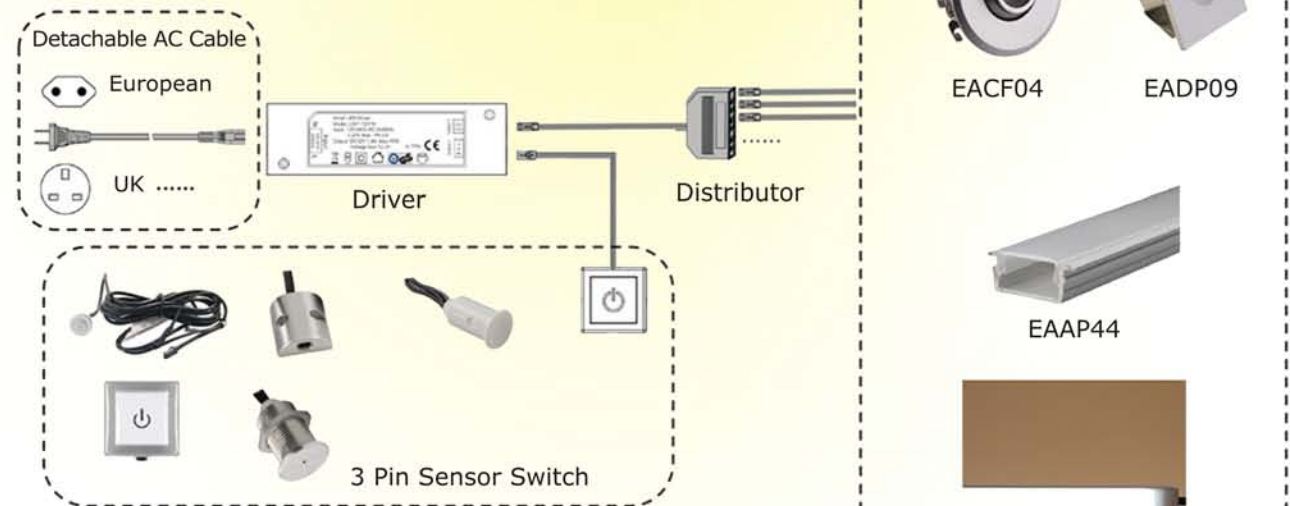



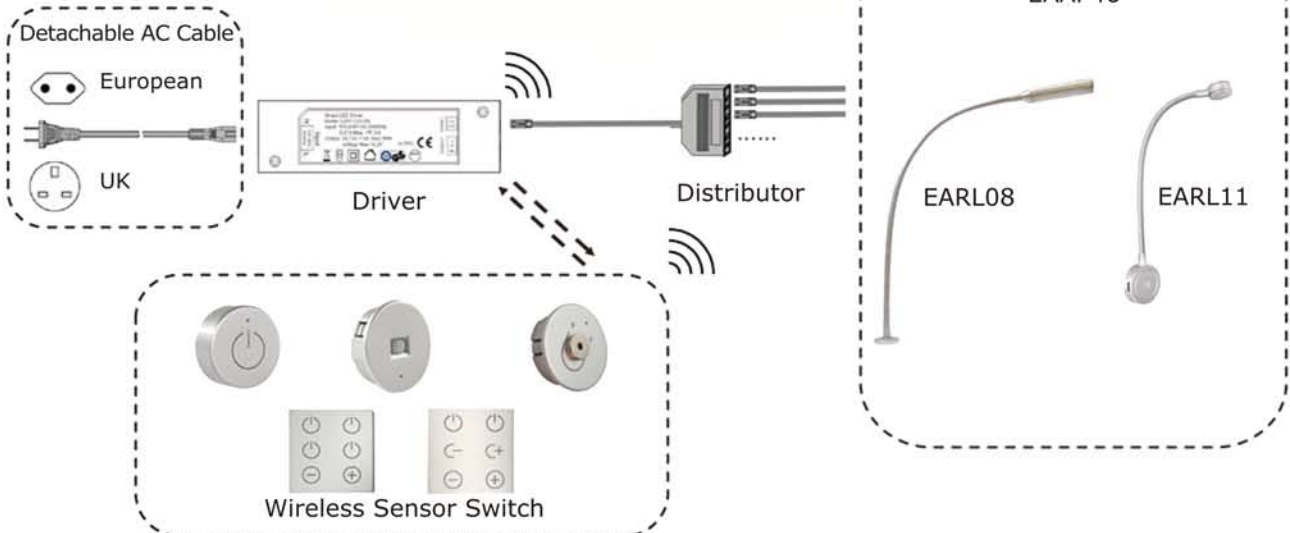



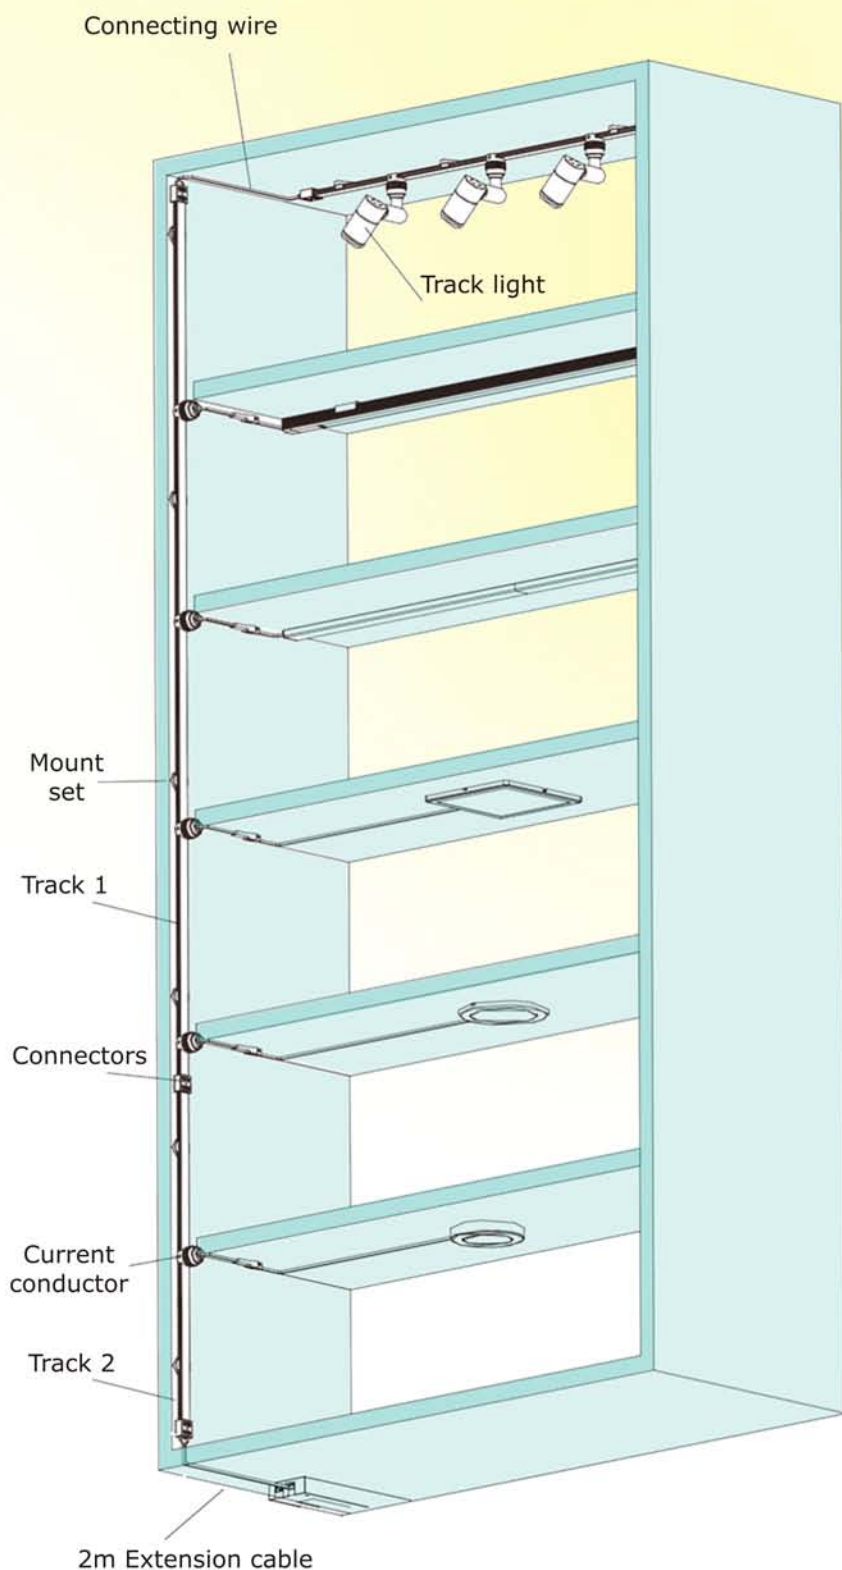


3. EuroArt smart wireless controller lighting solution



Features: The rail system loads A current, with simple and artistic wiring, no voltage drop at the joint, and all lights in uniform luminance.



Items	Picture	Description
EATR001	 Track Light	1.5W multi-angle adjustable mini track light
EATR002	 Track 1 *1  Mount set *3	Track 1: 1m Transparent PC + Copper Track Mount set: Transpatent PC
EATR003	 Track 2 *1  Mount set *2	Track 2: 0.5mm
EATR004	 Connecting wire *1	Connecting wire: 0.5mm
EATR005	 Connector *1	
EATR006	 Current conductor *1	Conduction of electricity to lights
EATR007	 2m Extension cable *1	Connecting track and driver



LED SYSTEM
SOLUTION

EAFS25-60



Domestic Use



Flexible



IP Rating available
20/44/67



Convenience
assembly



Cutting available




Features

- SMD 2835 300/ 600PCS / roll (5000x10x 0.3mm).
- DC 12/24V input, 0.2W/PC 2835 chip 3-LED cuttable for DC12V, 6-LED cuttable for 24V.
- Easy to install with 3M adhesive on back.
- Dimmer & Driver can be matched.
- Operating temperature :- 20°C+45°C.
- Auto-SMT machine for soldering.
- Long operation life : 50,000 hrs.
- Durable structure & stable performance.
- ETL/CE/ROHS compatible.
- Easy and seamless connect each section with exclusive clip, match well with narrow aluminium profile.

Applications :

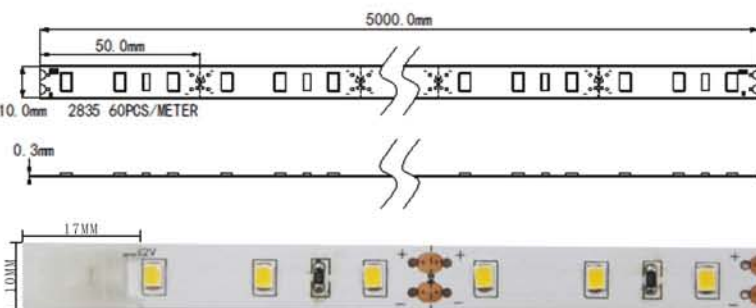

Architectural decorative lighting / Stairway lighting & decoration / Shop-window decoration / Indoor decoration / Emergency & security / Walkway lighting.



Specification:

Item Code	Color	LEDs/M	L(mm)
EAFS25-60 (3000k)	Warm	60	500-5000
EAFS25-60 (4000k)	Cool/Wht	60	500-5000
EAFS25-60 (6000k)	Day Light	60	500-5000

Accessory:

Product Name	Item No	Photo
LED Lead Cable	EACC29	
Connector	EACC30	

EAFS27-120



Domestic Use



Flexible



IP Rating available
20/44/67



Convenience
assembly



Cutting available



Features

- SMD 2835 300/ 600PCS / roll (5000x10x 0.3mm).
- DC 12/24V input, 0.2W/PC 2835 chip 3-LED cuttable for DC12V, 6-LED cuttable for 24V.
- Easy to install with 3M adhesive on back.
- Dimmer & Driver can be matched.
- Operating temperature :- 20°C+45°C.
- Auto-SMT machine for soldering.
- Long operation life : 50,000 hrs.
- Durable structure & stable performance.
- ETL/CE/ROHS compatible.
- Easy and seamless connect each section with exclusive clip, match well with narrow aluminium profile.



Applications :

Architectural decorative lighting / Stairway lighting & decoration / Shop-window decoration / Indoor decoration / Emergency & security / Walkway lighting.

Specification:

Item Code	Color	LEDs/M	L(mm)
EAFS27-120 (3000k)	Warm	120	500-5000
EAFS27-120 (4000k)	Cool/Wht	120	500-5000
EAFS27-120 (6000k)	Day Light	120	500-5000

Accessory:

Product Name	Item No	Photo
LED Lead Cable	EACC29	
Connector	EACC30	

EAFS01



Domestic Use



Flexible




IP Rating available
20/44/67



Convenience
assemble




Cutting available

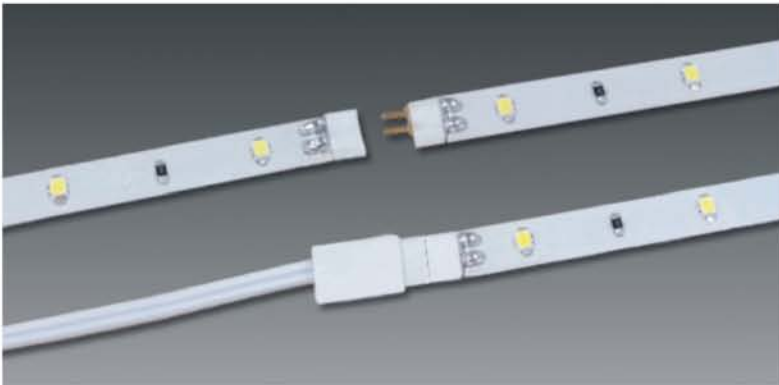

Features

- IP 44 Flexible LED Strips (36pcs/M 3014 Chips).
- Can be cut or connected together with interconnecting cables to produce interesting creative lighting effects..
- Upto 3 extension strips can be added to the connectors.
- Length:300mmx8mm (12pcs 3014, DC12V 1.2W.)
- Length:2000mm8mm (72pcs 3014, DC12V 7.2).


Technical Operatic Characters TA=25°C

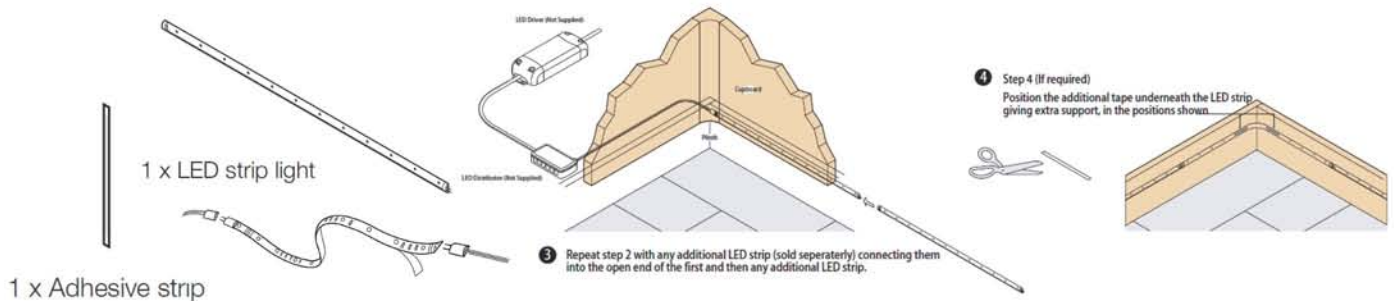

Specification:

Item Code	Color	LEDs/M	L(mm)
EAFS01 (3000k)	Warm	36	300/1000/2000
EAFS01 (4000k)	Cool/Whit	36	300/1000/2000
EAFS01 (6000k)	Day Light	36	300/1000/2000

Accessory:

Product Name	Item No	Photo
LED Lead Cable	EACC20	

EAHS07



Domestic Use



Flexible



IP Rating available
20/44/67



Convenience
assemble




Cutting available



Features

- High quality aluminium anodized house.
- With high bright PC Cover.
- Fix with Screw and surface mounted version.
- 60pcs/M 5630 Chips DC12V, different window and different wattage is available.
- Less Heating, no UV, energy saving, long life.

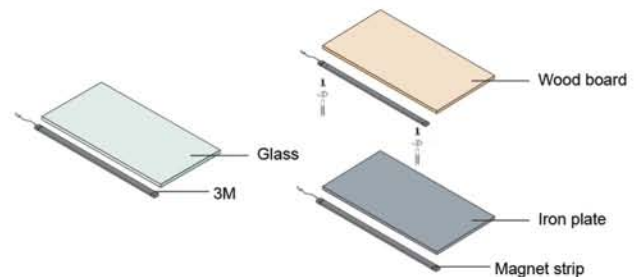

Applications :


Design for cabinet / showcase / shop area illumination

Accessory :

LED driver, cable and connector

Connector and End Cap

Product Name	Item No	Photo
Connectors	EAHS07A	
End Cap	EAHS07B	

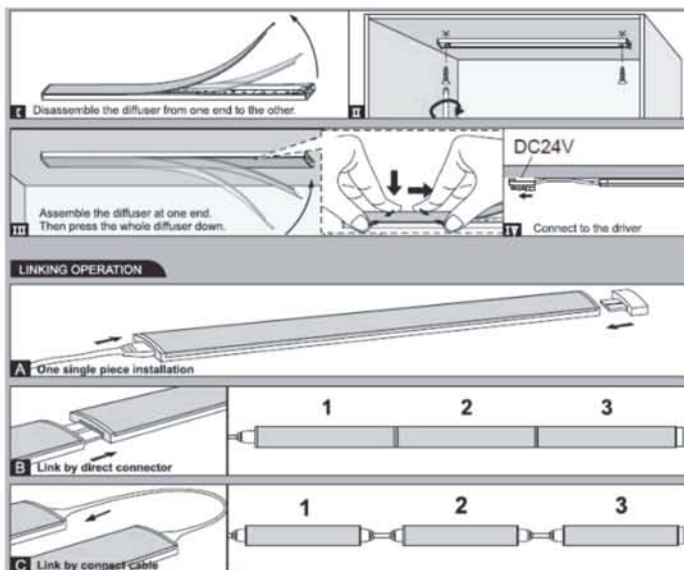

If input AC100-240V, need to add external LED driver(LD38/LD39)

Specification:

LED Color	Wattage per M	Lum per W	CRI
3000k / 4000k / 6000k	12W	70-100lum	≤90

EAFS17



Domestic Use



Flexible



IP Rating available
20/44/67



Convenience
assemble



Cutting available



Features:


- High lumen, high CRI and good color consistency.
- Better flexibility rolled copper foil for FPC.
- Can load more current with thicker FPC.
- Applicable to EuroArt plug, can easily be cut and installed.

Application:

- Designed for kitchen, living room, bathroom, ambient lighting




EATS02-B
CCT Controller

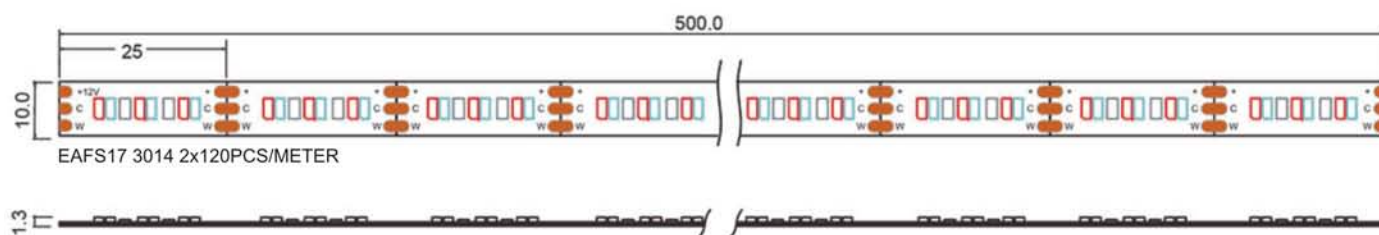

Specification:

Size(mm)	LED Chip	Input	Power	CCT	Lum/m	IP
500x5000x10	2x120pcs/m 3014	DC12V	2.6W	2700k-5000k	1200Lm	IP20,44,67

EAFS31

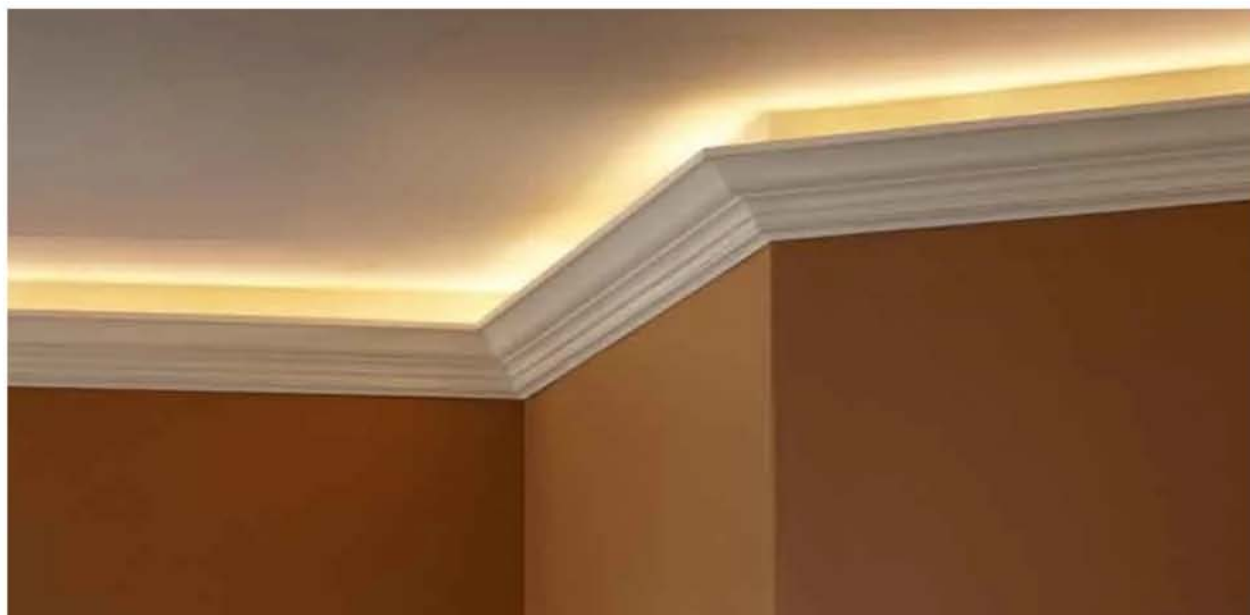

Domestic Use



Flexible



IP Rating available
20/44/67



Convenience
assembly



Cutting available




Features:

- High lumen, high CRI and good color consistency
- Better flexibility rolled copper foil for FPC
- Can load more current with thicker FPC
- Easy installation with fast connecting EuroArt System

Application:

- Designed for illumination of ceiling, wall decoration

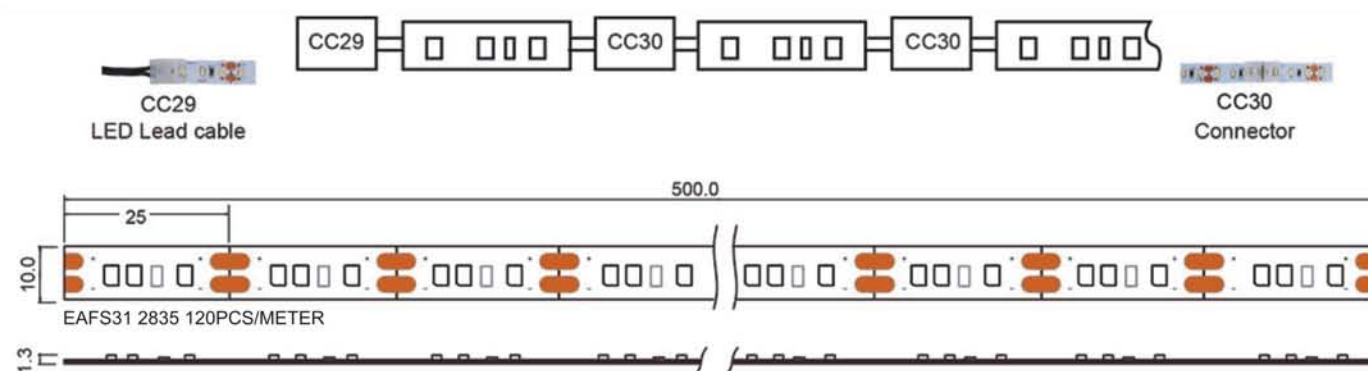

Specification:

Item no.	Size	LED Chip	Input	Power	CCT	Lum/m	IP
EAFS31	500-5000x10	60pcs/m 2835	DC12V	18W/m	3000k 4000k 6500k	1120Lm	IP20,44,67

EAFS51



Domestic Use



Flexible



IP Rating available
20/44/67



Convenience
assemble



Cutting available




Features:

- High lumen, high CRI and good color consistency
- Better flexibility rolled copper foil for FPC
- Can load more current with thicker FPC
- Easy installation with fast connecting EuroArt System

Application:

- Designed for illumination of architecture, decoration, staircase, cabinet, safety showcase

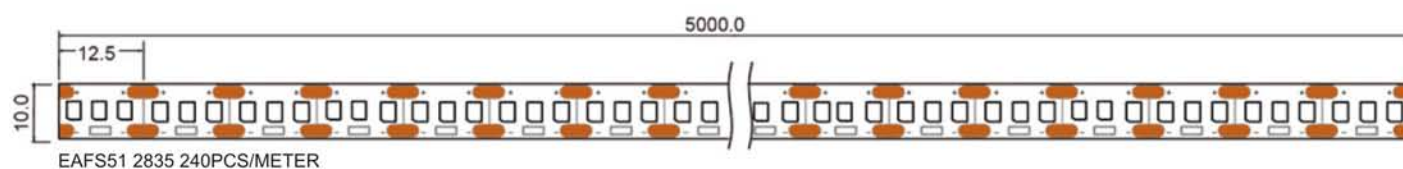

Specification:

Size	LED Chip	Input	Power	CCT	Lum/m	IP
500-5000x10	240pcs/m 2835	DC12V	18W/m	3000k 4000k 6500k	1850Lm	IP20,44,67

EAFS55



Domestic Use



Flexible



IP Rating available
20/44/67



Convenience
assemble



Cutting available




Features:

- High lumen, high CRI and good color consistency
- Better flexibility rolled copper foil for FPC
- Can load more current with thicker FPC
- Easy installation with fast connecting EuroArt System

Application:

- Designed for illumination of architecture, decoration, staircase, cabinet, safety showcase

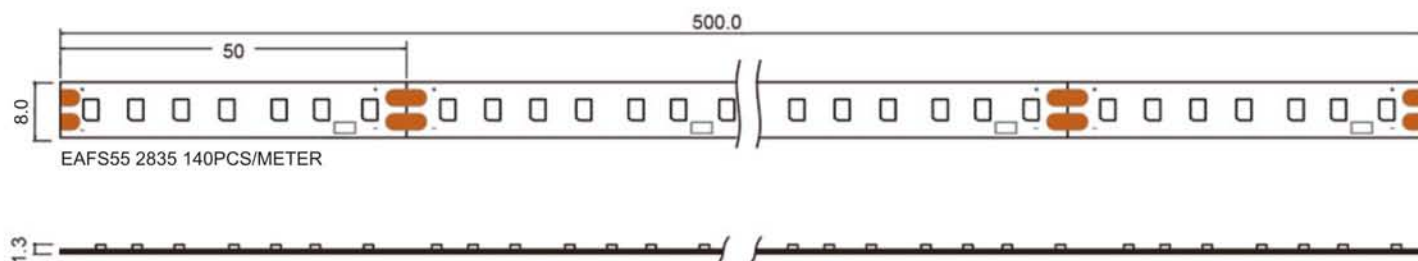

Specification:

Item no.	Size (mm)	LED Chip	Current	Input	Power	CCT	Lum/m	IP
EAFS55	500-5000x8	140pcs/m 2835	20/30/40mA	DC24V	10/14/19W/m	3000k 4000k 6500k	960/1400/1800Lm	IP20,44,67

EAFS56



Domestic Use



Flexible



IP Rating available
20/44/67



Convenience
assemble



Cutting available




Features:

- High lumen, high CRI and good color consistency
- Better flexibility rolled copper foil for FPC
- Can load more current with thicker FPC
- Easy installation with fast connecting EuroArt System

Application:

- Designed for illumination of architecture, decoration, staircase, cabinet, safety showcase

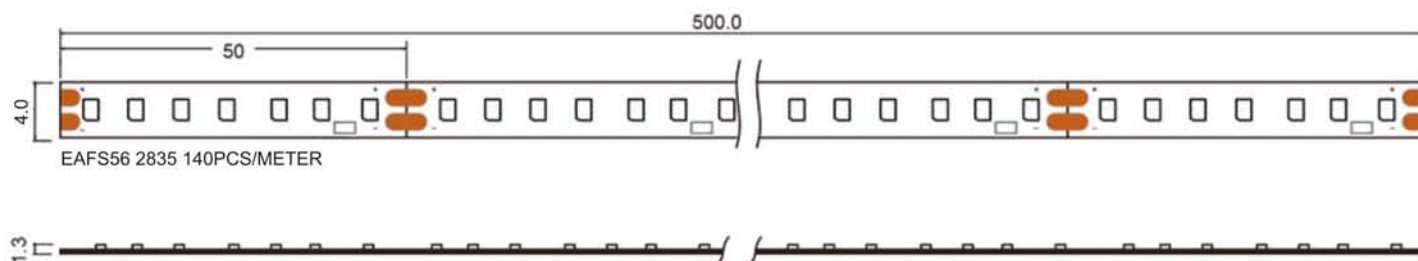

Specification:

Item no.	Size (mm)	LED Chip	Current	Input	Power	CCT	Lum/m	IP
EAFS56	500-5000x4	140pcs/m 2835	20/30/40mA	DC24V	10/14/19W/m	3000k 4000k 6500k	960/1400/1800Lm	IP20,44,67

EAFS57



Domestic Use



Flexible



IP Rating available
20/44/67



Convenience
assemble



Cutting available



Features:

- High lumen, high CRI and good color consistency
- Better flexibility rolled copper foil for FPC
- Can load more current with thicker FPC
- Easy installation with fast connecting EuroArt System

Application:

- Designed for illumination of architecture decoration, staircase, cabinet, safety showcase



Specification:

Size (mm)	LED Chip	Input	Power	CCT	Lum/m	IP
500-5000x15	240pcs/m 2835	DC24V	20W/m	3000k 4000k 6500k	1400Lm	IP20,44,67

EAFB06



Domestic Use



Flexible




IP Rating available
20/44/67



Convenience
assemble



Cutting available

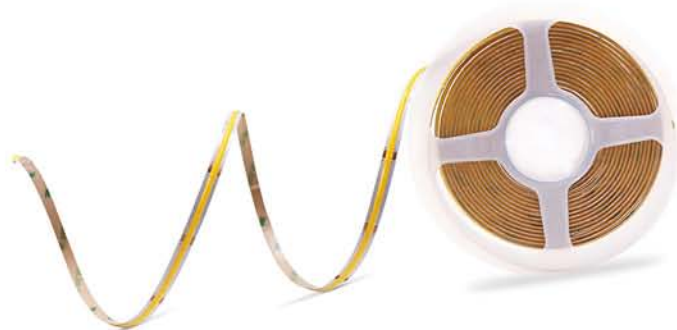

Features:

- No obvious light spots make the light more even and soft
- easy to cut by the cutting mark
- Can load more current with thicker FPC
- High brightness: 320smd/m or 480smd designed make uniform light

Application:

- Designed for illumination of architecture decoration, staircase, cabinet, safety showcase



Specification:

Size (mm)	LED Chip	Input	Power	CCT	Lum/m	IP
500-5000x5	320pcs/m 2835	DC12V	20W/m	3000k 4000k 6500k	80-110Lm	IP20

EACL08



Domestic Use



Flexible




IP Rating available
20/44/67



Convenience
assemble



Cutting available

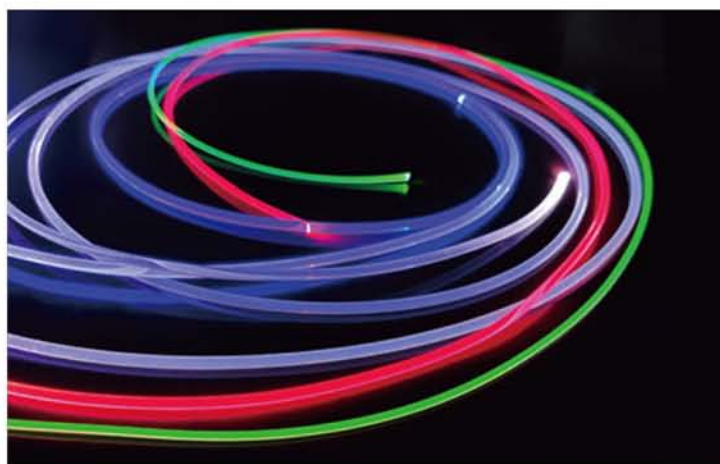

Features:

- High lumen efficiency with optical fiber of light
- Wire or wireless control design, single color or RGB color option


Application:

- Interior car, bedside, outline decoration etc


Specification:

Size (mm)	LED Chip	Power	Input	Installation	Installation
Ø40x13	1pcs 3535	1W	DC 12V	Red/Green/Blue/White/Yellow	Surface mounted Recessed mounted
59x45.5x10	1pcs 3535	2.5W	DC 5V	RGB	


Light Bar

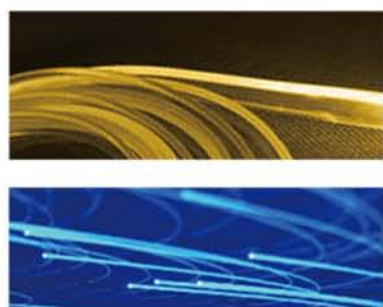

Light



RGB Color



Single Color

Easy Connector System for Flexible Strip Light

EACC20

EACC29

EACC30




Features:

LED flexible strip light cable and connector system, can easily connect the LED driver and LED flexible strip light, and extended distance from the LED driver to LED flexible strip light (the lead cable max 6M), it is efficient and convenient for furniture


Specification

Item no.	Description	Application
EACC20 Strip to Driver	LED flexible strip light cable and connector with DC12V JST male socket, max loaded current 2.5A, IP44	EAFS01
EACC29 Strip to Driver	LED flexible strip light cable and connector with DC12V JST male socket, max loaded current 3A, IP20	EAFS25, EAFS31, EAFS35, EAFS27
EACC30 Strip to Strip	Connector for two pcs LED flexible strip light	EAFS25, EAFS31, EAFS35, EAFS27

Application Drawing

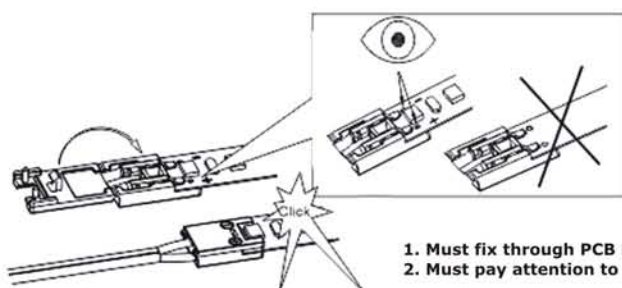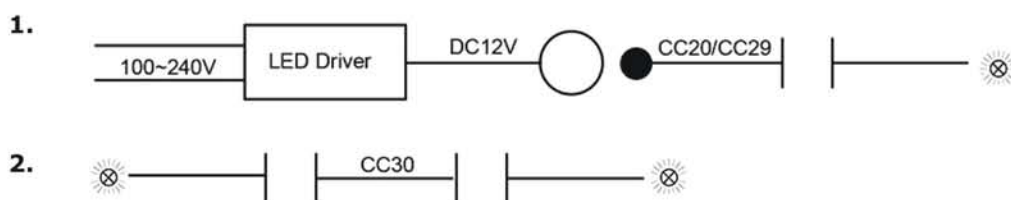

1. Must fix through PCB hole
2. Must pay attention to +/- Mark





EAPL05



EARL08



EALD38

EAPL05



Features:




- Material: ABS and aluminium.
- Size: Ø65mm x H10mm.
- LED chip: 20pcs 2835.
- Installation: Recessed or mounted by ring with screw.
- Cutout: Ø60mm
- Silver, Black, White

Application:

Design for cabinet / Showcase / Shop Area illumination

Vertical&Horizontal Beamwidth Center Beam Lux

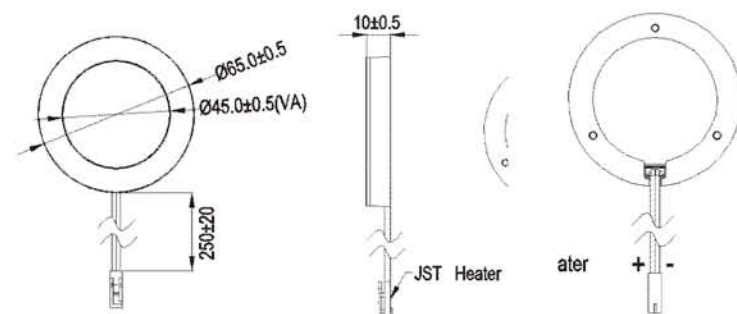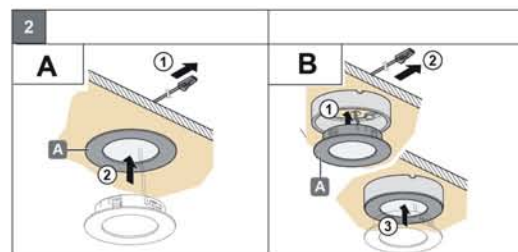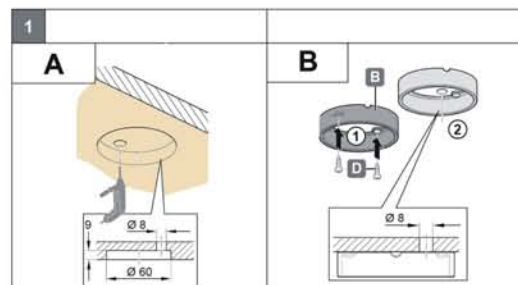

	112.1°		3000K	4000K	6000K
0.3m		74.27cm	112/367LX	119/393LX	109/359LX
0.5m		148.54cm	28/92LX	30/98LX	27/90LX
0.8m		222.80cm	12/41LX	13/44LX	12/40LX
1.0m		297.07cm	7/23LX	7/25LX	7/22LX
2.7m		802.09cm	0.1/3LX	1/3LX	1/3LX



Specification:

Power consumption	Power Input	Lum @ 6000K	Flux @ 0.5 M	CRI
1.8W	DC12V	153lm	90lx	≥90

Accessory:

Product Name	Item No	Photo
Mounted ring	EASM28	
LED Lead Cable	EACC33	

EACF11

Features:

- Material: Anodized Aluminium.
- Size: Ø40mm x H21mm.
- Input: DC350mAh
- Angle: Adjustable 30°.
- CCT: 3000K/4000K,6000K
- Silver, Black, White

Application:

Design for cabinet / Showcase / Shop area illumination

Accessory:

LED driver, cable and connector


If input AC100-240V, need to add external LED driver (DL3501)

Flux out:17.25lm

Height	Avr./Max(lx)	Diameter(cm)
0.3m	1863.98/2561.94	10.86
0.5m	465.99/640.48	21.71
0.8m	207.11/284.66	32.57
1.0m	116.50/160.12	43.42
2.7m	15.98/21.96	117.25
Angle: 24.5°		

Specification:

Power consumption	Power Input	Lum @ 3000K	Flux @ 1 M	CRI
1W	CC DC350mA DC2.8~3.5V	80lm	160lx	≥90

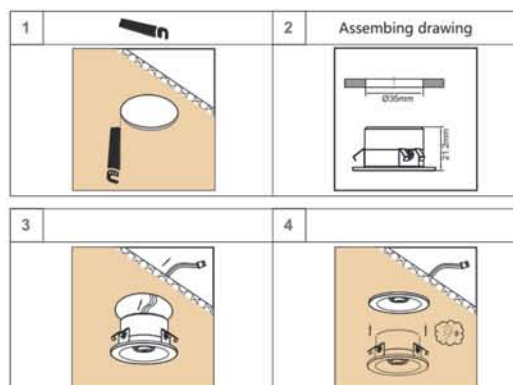

LED Super Slim mini panel light



EAPL06



EAPL07



Features:

- Material: Painting Plastic.
- Size: Ø100mm x H6mm.
- Color: Polish Silver
- LED Chip: 63pcs 3014
- Installation: Mounted by screw



Features:

- Material: Painting Plastic.
- Size: Ø100mm x H6mm.
- Color: Polish Silver
- LED Chip: 42pcs 3014
- Installation: Mounted by screw

Specification:

Power consumption	Power Input	Lum@3000K	Flux@1M	CRI
4.2W	DC24V	170lm	49lx	≥90




If input AC100-240V, need to add external LED driver (LD38/LD39)

0.3m	216/544	68.54
1.0m	20/49	228.5
1.5m	9/22	342.7
2.0m	5/12	456.9
3.0m	2/6	685.4
Angle: 97.6°		

Height	Avr./Max(Ix)	Diameter(cm)
--------	--------------	--------------

Application:

Design for cabinet / Showcase / Shop area illumination



IP44 LED Mini Down Light


EADP06




Features:

- Material: Anodized Aluminium (silver surface)
- Dimension: 35mm x 35mm x H30mm
- Cutout: Ø26mm
- LED chips: 3pcs 5630

Specification:

Power consumption	Power Input	Lum@3000K	Flux@1M	CRI
1.5W	DC12V	100lm	23lx	≥90

If input AC100-240V, need to add external LED driver (LD38/LD39)

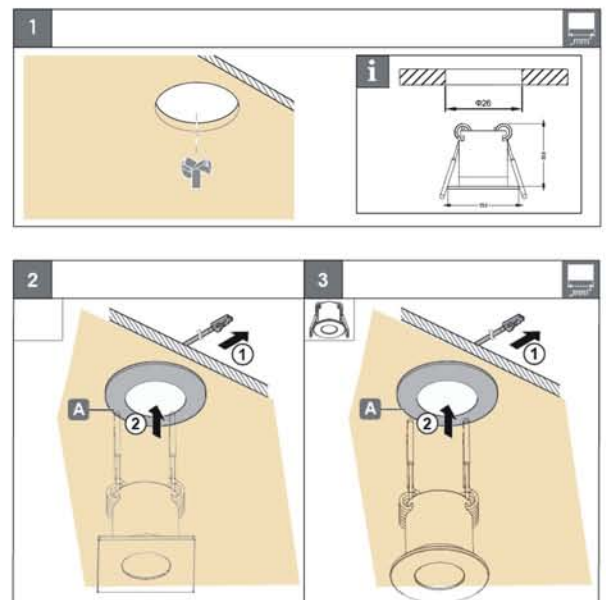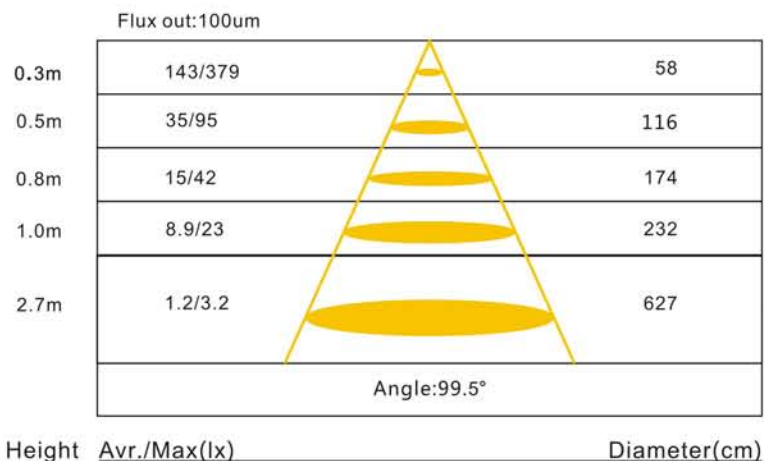

Accessory

LED driver, cable and connector


Applications:

Design for cabinet / Showcase / Shop area illumination

LED Cabinet series



EACB15

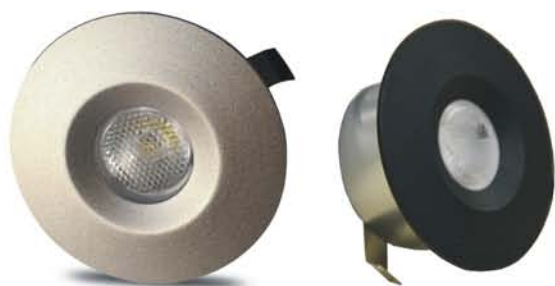

Features:

- Material: Anodized Aluminium
- Size: Ø42mm x H18.5mm
- Cutout: Ø35mm
- Color: Silver, Black

Applications:

Design for cabinet / Showcase / Shop area illumination

Accessory

LED driver, cable and connector


Specification:



Power consumption	Power Input	Lum@3000K	Flux@1M	CRI
1.5W	DC12V	115lm	317lx	≥90

If input AC100-240V, need to add external LED driver (LD38/LD39)

Vertical&Horizontal Beamwidth

Center Beam Lux

	19°		3000K	4000K	6000K
0.3m		9.04cm	3674/5072LX	3332/4546LX	3681/5160LX
0.5m		18.08cm	918/1268LX	833/1136LX	920/1290LX
0.8m		27.12cm	408/563LX	370/505LX	409/573LX
1.0m		36.17cm	229/317LX	208/284LX	230/322LX
2.7m		97.65cm	31/43LX	28/38LX	31/44LX

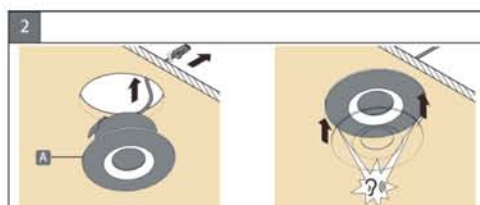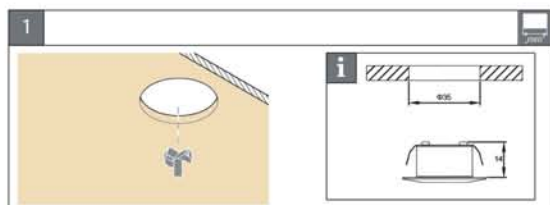

LED Cabinet light


EACB07

EACB20


Features:

- Material: Anodized Aluminium
- Size: Ø65mm x H13mm
- Cutout: Ø58-60mm
- Color: Silver, Black
- LED chip: 1 pcs 3W COB

Specification:

Power consumption	Power Input	Lum@3000K	Flux@1M	CRI
3W	DC12-24V	260lm	54lx	≥90

If input AC100-240V, need to add external LED driver (LD38/LD39)

Vertical&Horizontal Beamwidth Center Beam Lux

	105.5°		3000K	4000K	6000K
0.3m		78.90cm	206/607LX	237/641LX	271/669LX
1.0m		263.01cm	19/54LX	28/65LX	39/77LX
1.5m		394.52cm	8/24LX	17/33LX	26/44LX
2.0m		526.03cm	4/14LX	8/19LX	13/25LX
3.0m		789.04cm	2/6LX	6/11LX	11/16LX

Accessory


Product Name	Item No	Photo
Surface Ring	EASM01	

LED driver, cable and connector



Features:

- Material: Anodized Aluminium
- Size: 65mm x 65mm x H20mm
- Cutout: Ø58-60mm
- Color: Silver, Black
- LED chip: 1 pcs 3W COB

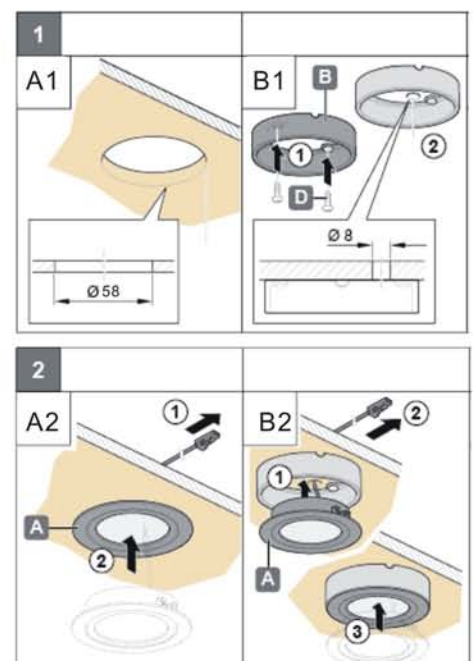

Applications:

Design for cabinet / Showcase / Shop area illumination

LED Mini Cabinet Puck light



EACB09



EACB21



Features:

- Material: Anodized Aluminium
- Size: Ø65mm x H13mm
- Cutout: Ø58-60mm
- Color: Silver, Black
- LED chips: 24pcs 3014

Specification:

Power consumption	Power Input	Lum@3000K	Flux@1M	CRI
3W	DC12V	210lm	54lx	≥90

If input AC100-240V, need to add external LED driver (LD38/LD39)

Vertical&Horizontal Beamwidth Center Beam Lux

	105.5°		Warm	Cool White	Day Light
0.3m		78.90cm	206/607LX	237/641LX	271/669LX
1.0m		263.01cm	19/54LX	28/65LX	39/77LX
1.5m		394.52cm	8/24LX	17/33LX	26/44LX
2.0m		526.03cm	4/14LX	8/19LX	13/25LX
3.0m		789.04cm	2/6LX	6/11LX	11/16LX

Accessory


Product Name	Item No	Photo
Surface Ring	EASM01	

LED driver, cable and connector



Features:


- Material: Anodized Aluminium
- Size: 65mm x 65mm x H13mm
- Cutout: Ø58-60mm
- Color: Silver, Black
- LED chips: 24pcs 3014

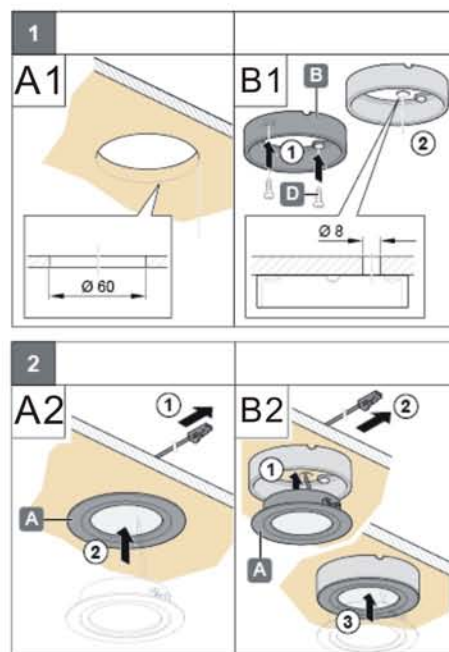

Applications:

Design for cabinet / Showcase / Shop area illumination

LED Cabinet light

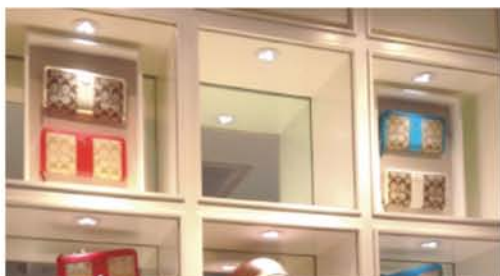

EACB08



Features:

- Material: Anodized Aluminium
- Size: Ø65mm x H14mm
- Cutout: Ø60mm
- Installation: Recessed or mounted by ring with screw

Applications:

Design for cabinet / Showcase / Shop area illumination

Specification:

Power consumption	Power Input	Lum@3000K	Flux@1M	CRI
3W	DC12-24V/DC350mA	240lm	54lx	≥90


If input AC100-240V, need to add external LED driver(LD38/LD39)

Vertical&Horizontal Beamwidth


Center Beam Lux

			Warm 3000k	Cool White 4000k	Day Light 6000k
0.3m	105.5°	78.90cm	206/607LX	237/641LX	271/669LX
1.0m		263.01cm	19/54LX	28/65LX	39/77LX
1.5m		394.52cm	8/24LX	17/33LX	26/44LX
2.0m		526.03cm	4/14LX	8/19LX	13/25LX
3.0m		789.04cm	2/6LX	6/11LX	11/16LX


Assembly

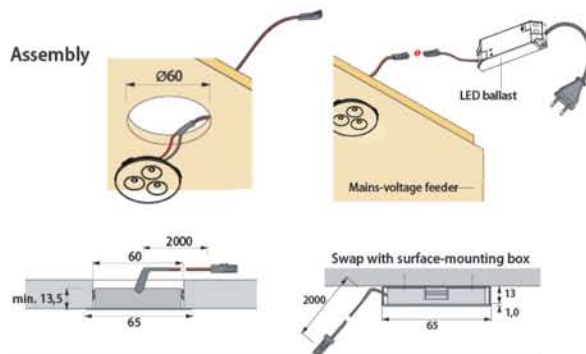

Accessory:

Product Name	Item No	Photo
Surface Ring	EASM08	

LED driver, cable and connector

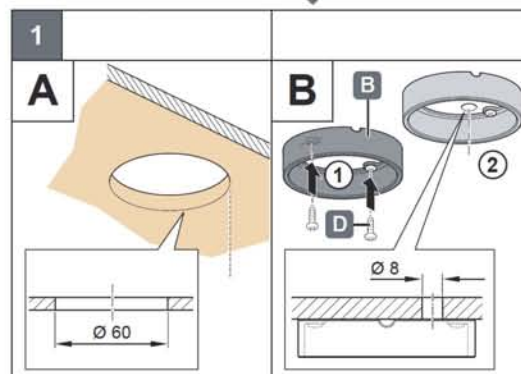

LED Slim Cabinet Light



EACB10



Features:

- Material: Polished Stainless Steel
- Size: Ø55mm x H8.0mm
- Color: Polish silver
- LED chip: 24pcs 3014
- Installation: Mounted by screw or adhesive tape


Specification:

Power consumption	Power Input	Warm White	Flux@1M	CRI
1.8W	DC12V	170lm	49lx	≥90

If input AC100-240V, need to add external LED driver (LD38/LD39)

0.3m	216/544	68.54
1.0m	20/49	228.5
1.5m	9/22	342.7
2.0m	5/12	456.9
3.0m	2/6	685.4
Angle: 97.6°		

Height	Avr./Max(Ix)	Diameter(cm)
--------	--------------	--------------

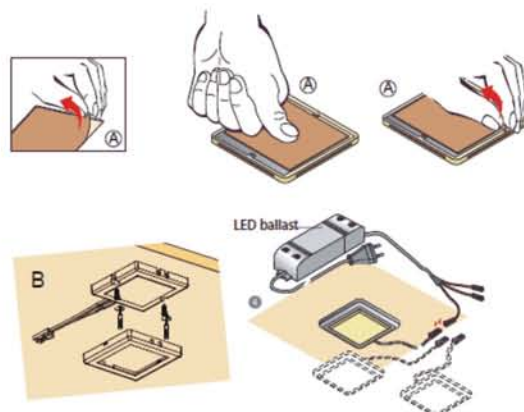

Applications:

Design for cabinet / Showcase
Shop area illumination

Accessory:

LED driver, cable and connector

LED Cabinet light



EACB05



EACB06



Features:

- Material: Brushed Aluminium
- Size: Ø52mm x H20mm
- Hole Dimension: Ø45mm
- Color: Silver
- Adjustable Angle: 30 degree up/down



Features:

- Material: Brushed Aluminium
- Size: 60mm x 60mm x H20mm
- Hole Dimension: Ø50mm
- Color: Silver
- Adjustable Angle: 30 degree up/down

Specification:

Power consumption	Power Input	Warm White Lum@3000K	Flux@1M	CRI
1W	DC350mA	70-80lm	102lx	≥90

If input AC100-240V, need to add external LED driver (DL3501)

Vertical&Horizontal Beamwidth Center Beam Lux


		Warm White 3000K	CoolWhite 4000K	Day light 6000K
0.3m	12.86cm	1231/1315LX	1442/1532LX	1645/1752LX
1.0m	42.88cm	108/102LX	130/138LX	235/245LX
1.5m	64.31cm	41/35LX	58/61LX	120/142LX
2.0m	85.75cm	26/29LX	32/35LX	61/73LX
3.0m	128.63cm	10/12LX	15/16LX	33/39LX

Applications:

Design for cabinet / Showcase /
Shop area illumination

Accessory:

LED driver, cable and connector

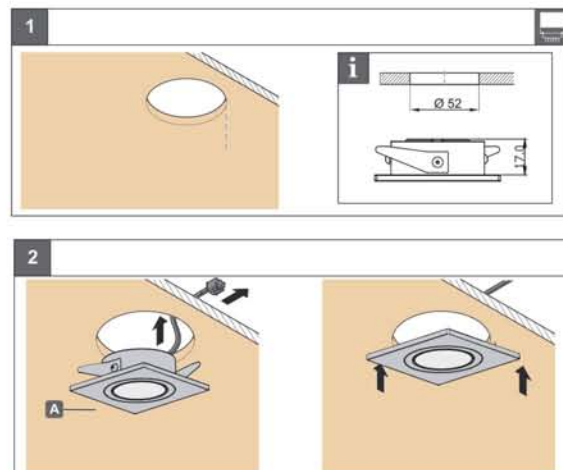

LED Spot light


EACF03

EACF04

Features:

- Material: Anodized Aluminium
- Size: Ø40mm x H32mm
- Cutout: Ø35mm
- Color: Silver, Black
- Adjustable Angle: 360°


Features:

- Material: Anodized Aluminium
- Size: Ø40mm x H18mm
- Cutout: Ø35mm
- Color: Silver, Black, Golden
- Adjustable Angle: 360°

Specification:

Power consumption	Power Input	Lum@3000K	Flux@1M	CRI
1W	DC350mA	70-80lm	102lx	≥90

If input AC100-240V, need to add external LED driver (DL3501)

Vertical&Horizontal Beamwidth Center Beam Lux


	24.2°	3000K	4000K	6000K
0.3m	12.86cm	1231/1315LX	1442/1532LX	1645/1752LX
1.0m	42.88cm	108/102LX	130/138LX	235/245LX
1.5m	64.31cm	41/35LX	58/61LX	120/142LX
2.0m	85.75cm	26/29LX	32/35LX	61/73LX
3.0m	128.63cm	10/12LX	15/16LX	33/39LX

Applications:

Design for cabinet / Showcase /
Shop area illumination

Accessory:

LED driver, cable and connector

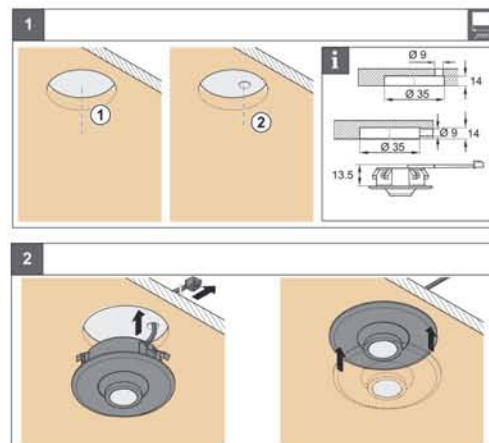

LED Focus spot light



EACF13



Features:

- Material: Anodized Aluminum
- High lumen efficiency high CRI and color consistency
- Delicate appearance and easy installation
- Cutout Size: Ø35mm
- Color: Silver, Black
- Adjustable angle: 20°


Application:


- Cabinet, display cabinet and wine cabinet

Specification:

Size (mm)	Power	Input	Color	CCT	Lum@3000K	Flux@30cm	CRI
Ø40x24	2W	DC600mA	Black Sliver	3000k 4000k 6500k	165Lm	10015Lx	≥80

Center Beam Lux

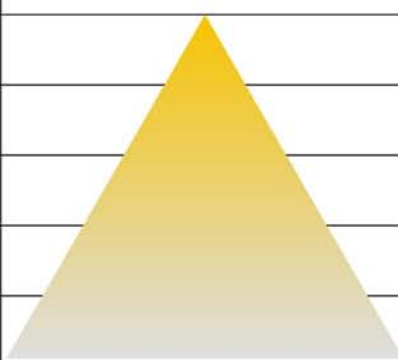cm	20°	Lux
		3000K
30		10015
50		2504
80		1113
100		626
270		86

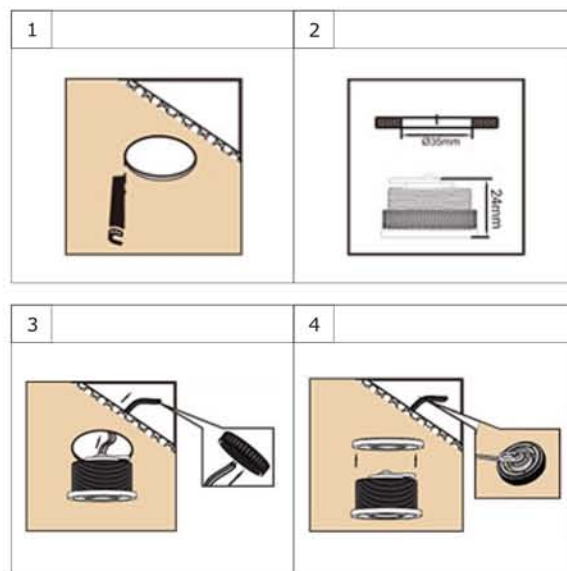

LED cabinet light


EACB28


Features:

- Material: Anodized Aluminium
- High lumen efficiency high CRI and color consistency
- Delicate appearance and easy installation
- Color: Silver
- Cutout Size: Ø30mm


Application:


- Cabinet, display cabinet and wine cabinet

Specification:

Size (mm)	Power	Input	Color	CCT	Lum@4000K	Flux@30cm	CRI
Ø36x14	1.2W	DC1.2W	Silver	3000k 4000k 6500k	105Lm	623Lx	≥80

Center Beam Lux

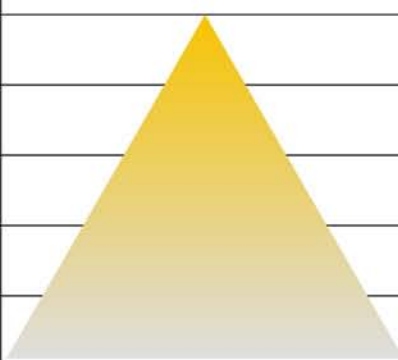cm	48°	Lux
		4000K
30		623
50		156
80		69
100		40
270		5

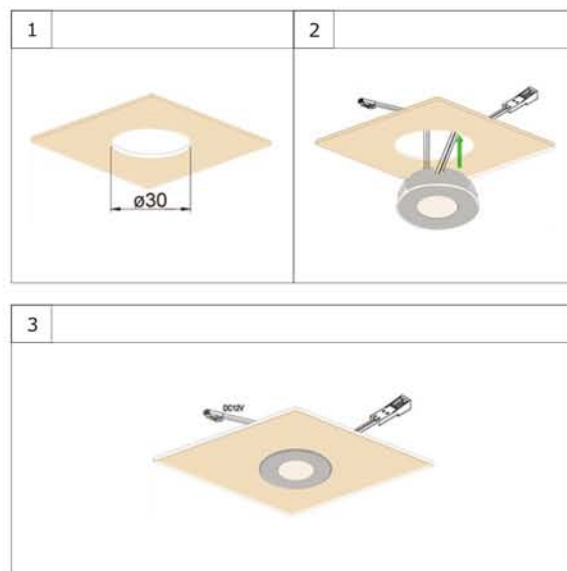

LED cabinet light



EACB29



Features:

- Material: Anodized Aluminium
- High lumen efficiency high CRI and color consistency
- Delicate appearance and easy installation
- Cutout Size: Ø60mm


Application:


- Cabinet, display cabinet and wine cabinet

Specification:

Size (mm)	Power	Input	Color	CCT	Lum@4000K	Flux@30cm	CRI
Ø65x12	2.5W	DC24V	Silver	3000k 4000k 6500k	264Lm	1116Lx	≥80

Center Beam Lux

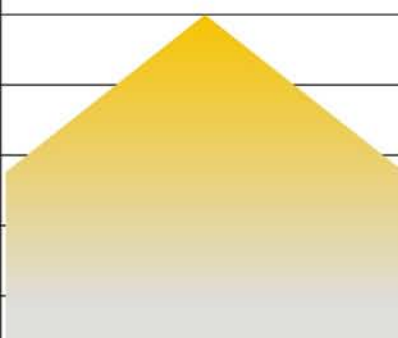cm	82°	Lux
		4000K
30		1116
50		279
80		124
100		69
270		9

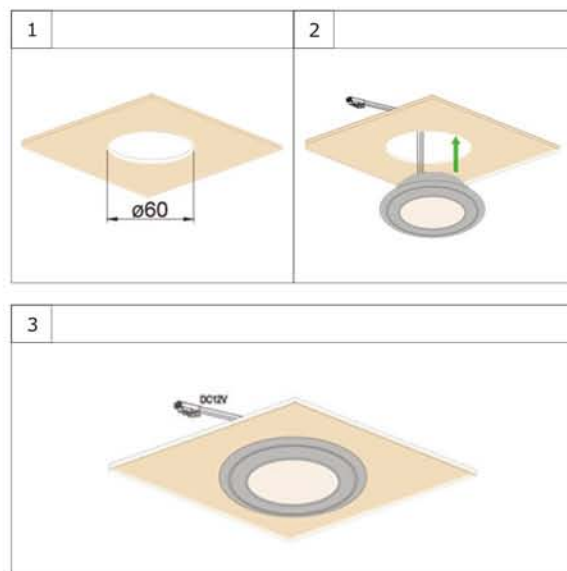

Mirror light with sensor switch



EAOC05



Features:



- Uniform in luminance, high lumen and the point of the LED light are not visible
- Different length can be designed and the light angle can be adjusted
- It is convenient for installation

Application:

- Illumination of mirror



Specification:

Switch	LED Chip	Power	Color	CCT	CRI
PIR Sensor Touch dimmer	120pcs/m 2835	9.6W/m	Silver Black	3000k 4000k 6500k	≥ 80

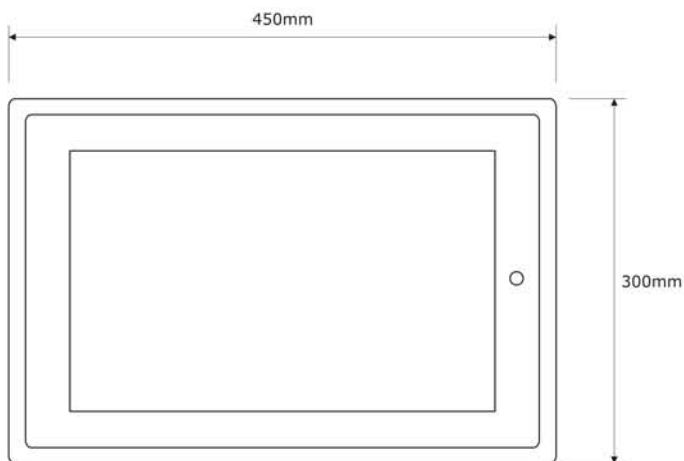

Mini LED track light series


EATR01

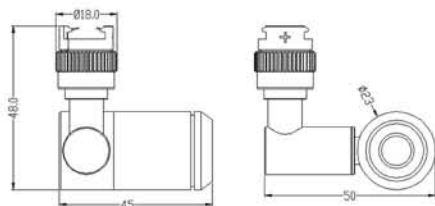EATR02


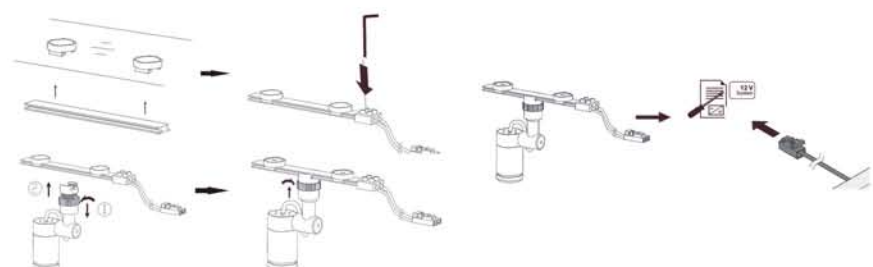
Specification:

Power consumption	Power Input	Lum@3000K	Flux@1M	CRI
1.25W	DC12V	70-80lm	188lx	≥90




If input AC100-240V, need to add external LED driver (LD38/LD39)

Vertical&Horizontal Beamwidth Center Beam Lux

	23.7°		3000K	4000K	6000K
0.3m		12.59cm	1658/2218LX	1680/2301LX	1767/2386LX
1.0m		41.96cm	144/188LX	151/198LX	159/215LX
1.5m		62.95cm	64/88LX	67/92LX	71/96LX
2.0m		83.93cm	31/44LX	35/50LX	40/54LX
3.0m		125.89cm	13/19LX	15/22LX	17/24LX



Accessory

Product Name	Item No	Photo
Transparent Track	EATR1101A1	
Mount Set	EATR1101A2	
Connector	EATR1101A3	
Led Driver	EALD38/EALD39	

Applications: Design for cabinet / Showcase / Shop area illumination

Jewellery showcase LED light series


EAJS02



EAJS03


Features:

- Material: Anodized Aluminium (silver surface)
- Input Voltage: DC12/24V
- LED Source: 3x1W or 6X1w, connectable
- CCT: 3000K/4000K/6000K


Specification:

Item no.	Description	Power Input	Lum@3000K	Flux@1M	CRI
EAJS1303-3	3W, 180mm	DC12~24V	210lm	150lx	≥80
EAJS1303-3	6W, 180mm	DC12~24V	480lm	240lx	≥80

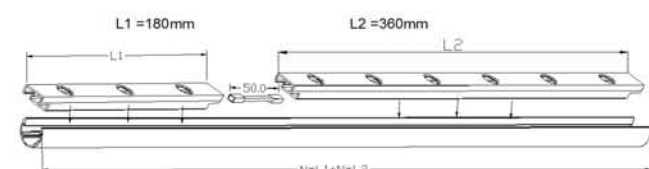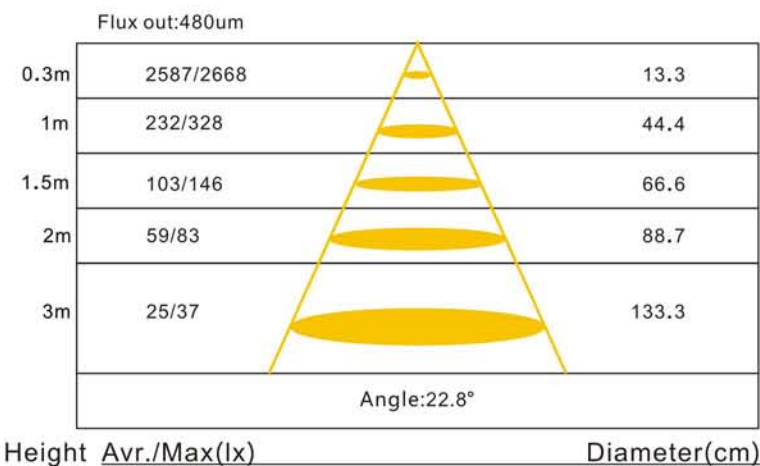

Features:

- Material: Anodized Aluminium (silver surface)
- Input Voltage: DC12/24V
- LED Source: 3x1W or 6X1w, connectable
- CCT: 3000K/4000K/6000K

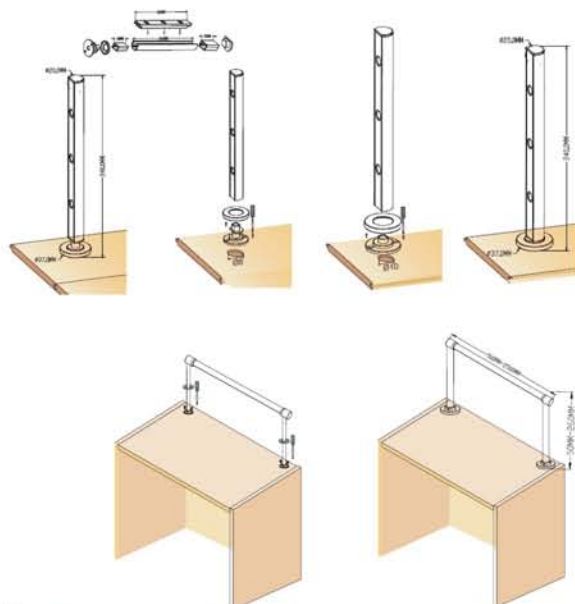

Applications:

Design for cabinet / Showcase / Shop area illumination

LED jewellery showcase light



EAJS10







Features:

- Material: Anodized Aluminium
- Input: DC350mA
- Light source: 1pcs 1W LED chip
- Adjustable: Up/down 80°, horizon 350°
- Color: Silver, Black
- CCT: 3000K / 4000K / 6000K

Specification:

Power consumption	Power Input	Lum@6000K	Flux@1M	CRI
1W	DC35mA	80lm	42lx	≥90

0.3m	2282/3264	15
0.5m	143/205	53
0.8m	64/93	80
1.0m	28/42	106
2.7m	9/15	160
Angle:30.2°		
Height	Avr./Max(lx)	Diameter(cm)

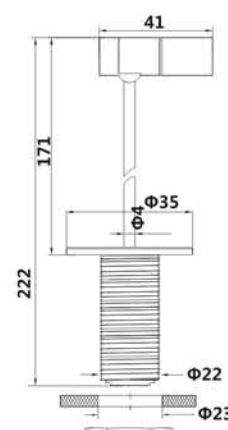

Applications:

Design for cabinet / Showcase / Shop area illumination

Accessory:

LED driver, cable and connector

LED Jewellery Showcase Light



EAJS08



Features:

- Material: Anodized Aluminium
- Input: DC12V
- Light source: 1pcs 2W LED chip
- Adjustable: Up/down 80°, horizon 350°
- Color: Silver, Black
- CCT: 3000K / 4000K / 6000K


Specification:

Power consumption	Power Input	Day Light Lum@6000K	Flux@1M	CRI
2W	DC12V	140lm	22lx	≥90

If input AC 100-240V, need to add external LED driver(LD38/LD39)

0.3m	2992/3637	9
0.5m	187/227	35
0.8m	59/86	51
1.0m	16/22	70
2.7m	23/29	102
Angle:22°		

Height Avr./Max(lx) Diameter(cm)

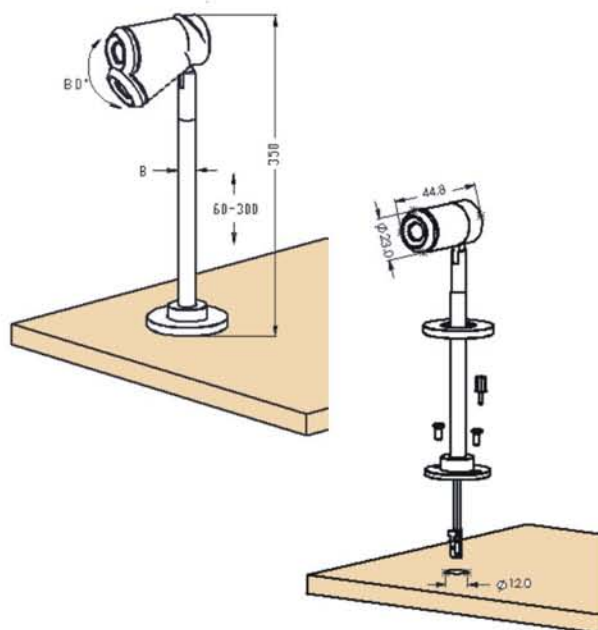

Applications:

Design for cabinet / Showcase / Shop area illumination

Accessory:

LED driver, cable and connector

LED Dimable Reading light



EARL08



Features:

- Material: Anodized Aluminium
- Size: Ø20mm x H580mm
- Surface color: Silver
- Light source: 12 pcs 2835 chips
- Switch: Touch dimmer switch on head

Specification:

Power consumption	Power Input	Lum@6000K	Flux@1M	CRI
1.8W	DC12V	120lm	54lx	≥90

If input AC100-240V, need to add external LED driver (LD38/LD39)

		Warm 3000K	CoolWhite 4000K	Day Light 6000K
0.3m	78.90cm	206/607LX	237/641LX	271/669LX
1.0m	263.01cm	19/54LX	28/65LX	39/77LX
1.5m	394.52cm	8/24LX	17/33LX	26/44LX
2.0m	526.03cm	4/14LX	8/19LX	13/25LX
3.0m	789.04cm	2/6LX	6/11LX	11/16LX



Applications:

Design for cabinet / Showcase
Shop area illumination

Accessory:

LED driver, cable and connector

Assembly

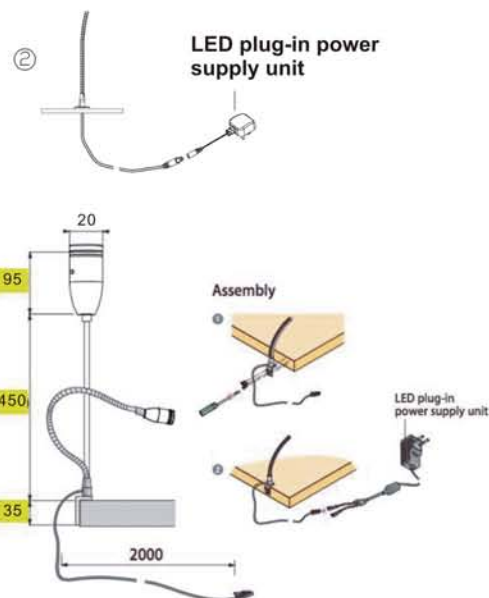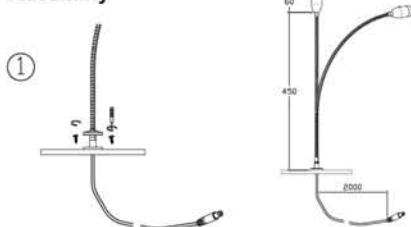

LED Reading light with USB output



EARL11



Features:

- Material: Anodized Aluminium
- Size: Ø20mm x H580mm
- Surface color: Silver
- Light source: 3 pcs 5630 chips
- Switch: Charging Port And Dimmer Switch on base

Specification:


Power consumption	Power Input	Lum@3000K	Flux@1M	CRI
10W (with charging)	DC12V	100lm	23lx	≥90

If input AC100-240V, need to add external LED driver (LD38/LD39)

Flux out:100um

0.3m	143/379	58
0.5m	35/95	116
0.8m	15/42	174
1.0m	8.9/23	232
2.7m	1.2/3.2	627

Angle:99.5°

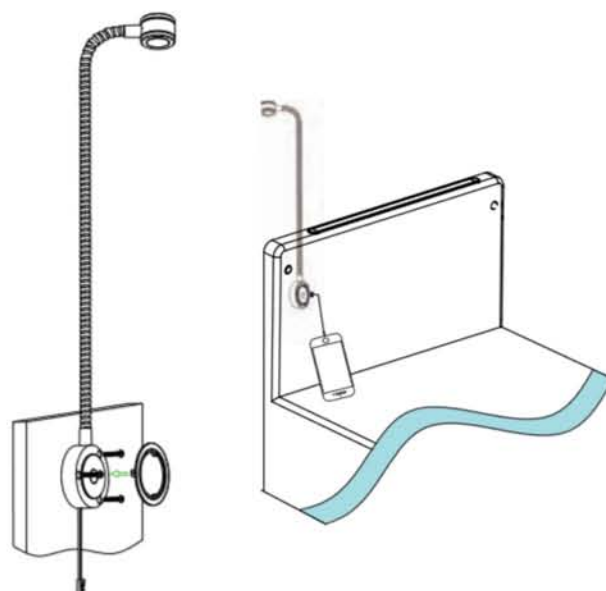

Applications:

Design for cabinet / Showcase / Shop area illumination

Accessory:

LED driver, cable and connector

LED Reading light



EARL01



Features:

- Material: Anodized Aluminium
- Size: Ø30mm x H450mm
- Color: Silver
- Switch: integral on/off switch

Specification:

Power consumption	Power Input	Lum@3000K	Flux@1M	CRI
1W	DC350mA	70-80lm	144lx	≥90

If input AC100-240V, need to add external LED driver (DL3501)

0.3m	1173/1602	16.47
1.0m	106/144	54.9
1.5m	47/64	82.35
2.0m	26/36	109.8
3.0m	12/16	164.7
Angle:30.7°		


Height Avr./Max(Ix) Diameter(cm)

Applications:


Design for cabinet / Showcase / Shop area illumination

Accessory:

LED driver, cable and connector

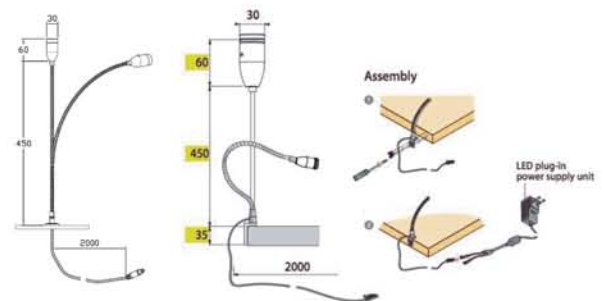

Assembly

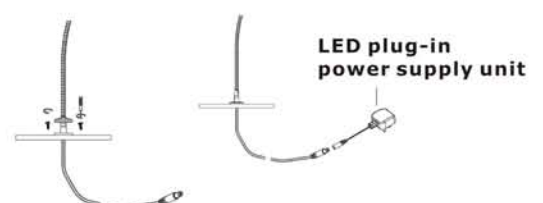

LED glass shelf



EASL04



Features:

- High quality anodized aluminium housing.
- Two light sources, glowing from the glass and the top
- Fix with screw and surface mounted version.
- Suitable for 8mm thick glass plate
- 60pcs/M 2835 Chips DC12V, different window and wattage is available.
- Less heating, no UV, energy saving, long life.

Specification:

LED Color	Power	Length (mm)	CRI
Blue	1.8/2.8	575/862	NA
Warm White	1.8/2.8	575/862	≥90
Cool White	1.8/2.8	575/862	≥90



Applications:

Design for cabinet Showcase / Shop area illumination

LED glass bracket



EAHG04



Features:

- Material: Anodized Aluminium
- Size: 64x12xH21mm
- Special protection design for strip light, long life span
- Suitable for 8-12mm glass thickness
- White or blue light



Application:

- Suitable for cabinet, showcase and other glass illumination

Specification:

Material	Surface	Application	Color	Length(mm)	Installation
Al6063	Anodized aluminium	Sunken glass	Silver	64	Surface mounted

Installation

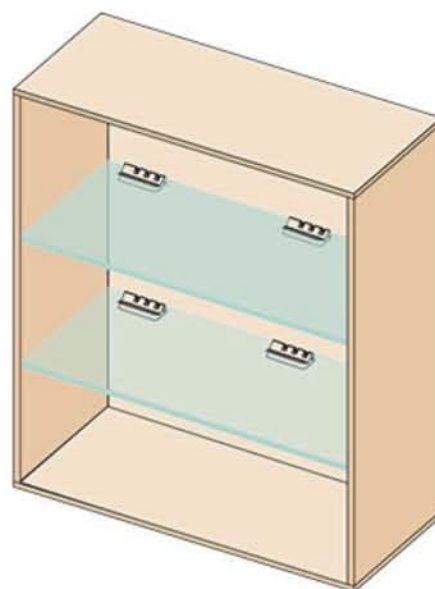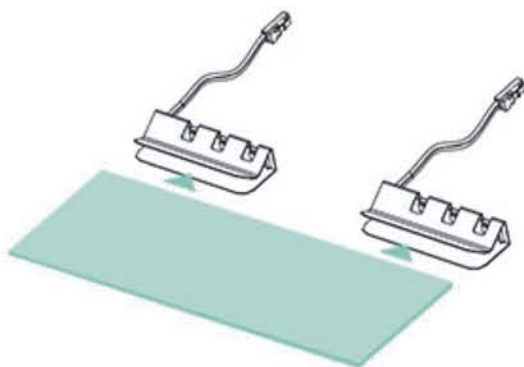

LED glass shelf



EASL02



Features:

- Material: Anodized Aluminium
- Color: White
- Uniform in luminance
- Multi-angle lighting design
- Loading weight within 10 kilograms



Application:

- It is suitable for using in decorative lighting, display, showcase

Specification:

Surface	LED Chip	Input	Power	Color	Length(mm)	CRI
Anodized aluminium	60pcs 2835	AC240V	6W	Silver	600	≥80
	100pcs 2835		10W		900	

Installation

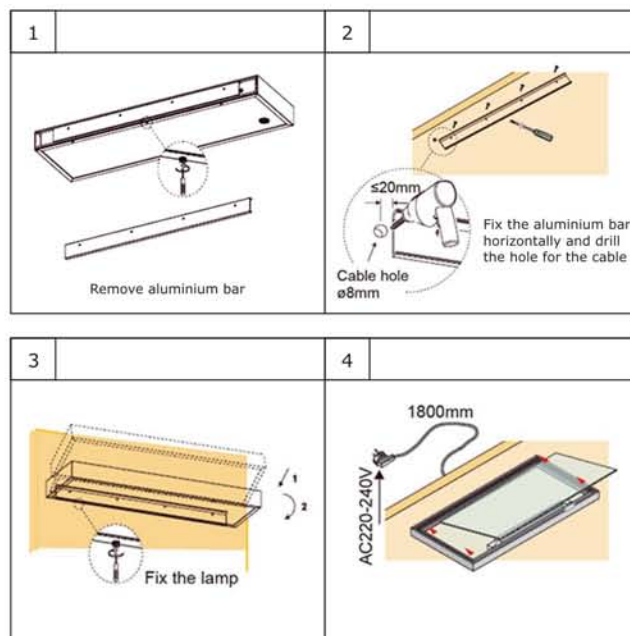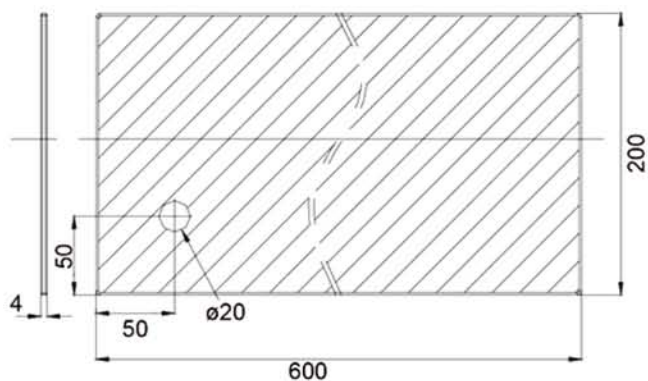

LED cabinet bottom shelf



EASL05



Features:

- Material: Anodized Aluminium
- High lumen efficiency, high CRI and good color consistency
- Nice appearance



Application:

- It is suitable for lighting in cabinet bottom

Specification:

Surface	LED Chip	Input	Power	Color	Length(mm)	CRI
Anodized aluminium	36pcs 2835	DC12V	7W	White	567	≥80
	54pcs 2835		10W		867	

Installation

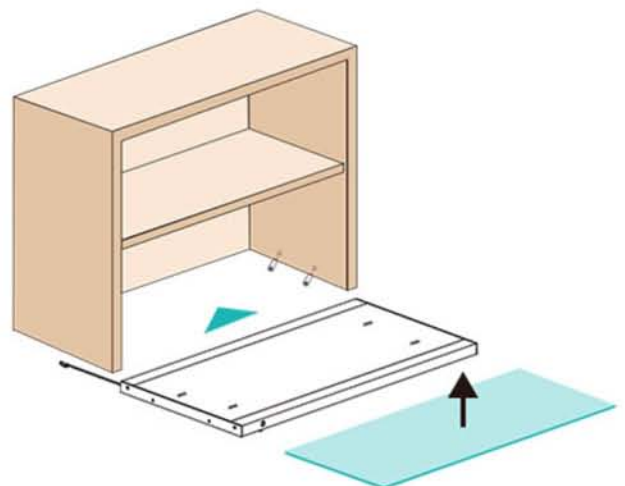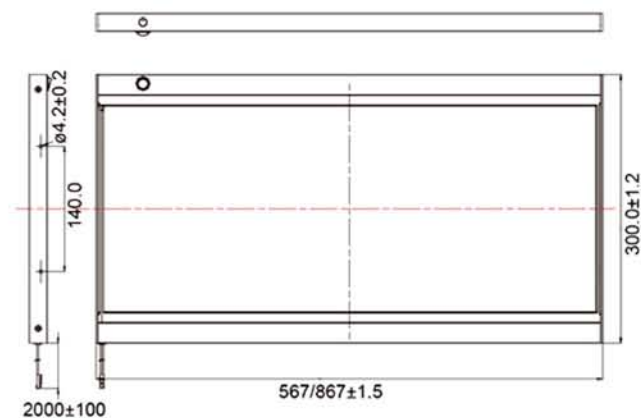

LED cabinet bar light



EAHS44



Features:

- Length can be customized
- High quality PC cover make light more homogenous
- Exquisite make wider use of than the others



Application:

- Furniture lighting, store shelf lighting, window display lighting


Specification:

Size	LED Chip	Input	Power	CCT	CRI	Installation
500x17.8x9.5	60pcs/m 2835	DC12V	2.6W	3000k	≥80	Recessed mounted
643x17.8x9.5	60pcs/m 2835		3W	4000k 6500k		

Installation

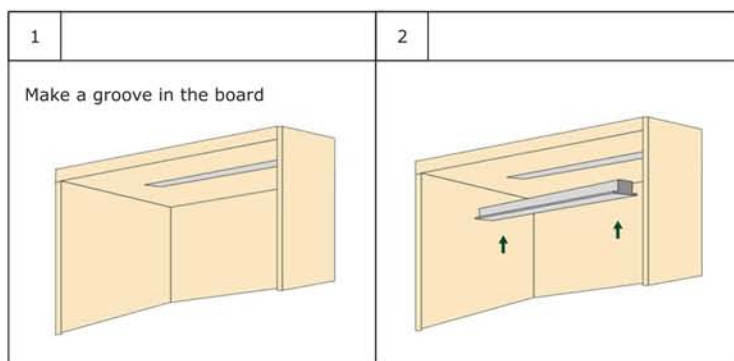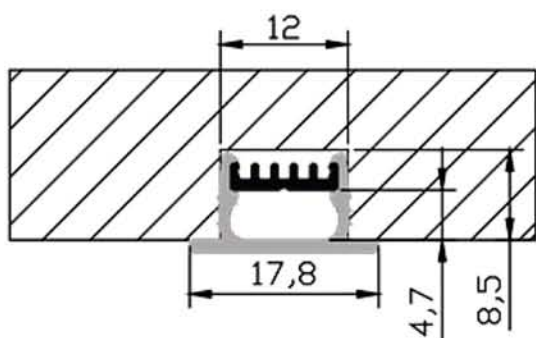

LED profile for glass shelf

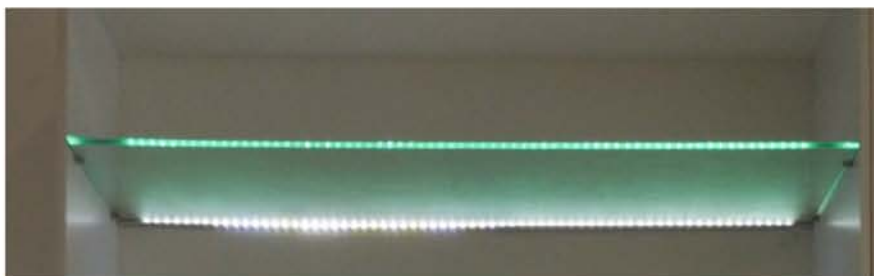

EAHG01



Features:

- High quality anodized aluminium housing
- Installed on the backside of the glass shelf
- Fix the screw and surface mounted version
- 60pcs/M 2835 Chips DC12V, different window and wattage is available
- Less heating, no UV, energy saving, long life

Applications:




Suitable for using in decorative lighting
Display and show case

Specification:

LED Color	Power	Length (mm)	CRI
Blue	1.8/2.8	575/862	NA
Warm White	1.8/2.8	575/862	≥90
Cool White	1.8/2.8	575/862	≥90

If input AC100-240V, need to add external LED driver (LD38/LD39)

Assembly



LED Profile for glass shelf



EAHG02



Features:

- High quality anodized aluminium housing
- Installed on the frontside of the glass shelf
- Fix the screw and surface mounted version
- 60pcs/M 2835 Chips DC12V, different window and wattage is available
- Less heating, no UV, energy saving, long life


Applications:

Suitable for using in decorative lighting
Display and show case

Specification:

LED Color	Power	Length (mm)	CRI
Blue	1.8/2.8	575	NA
Warm White	1.8/2.8	575	≥90
Cool White	1.8/2.8	575	≥90

If input AC100-240V, need to add external LED driver (LD38/LD39)

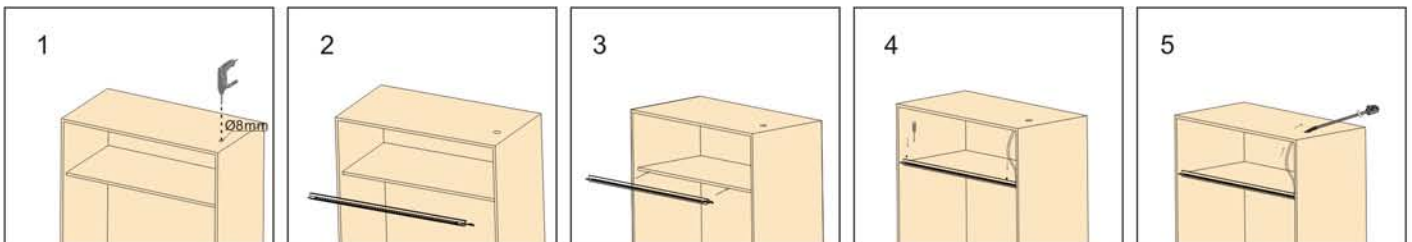

LED cabinet bar light with sensor



EAHS03



EAHS05




Features:

- With IR door sensor on the side of aluminium profile
- Size: 862x16x13mm
- Turn on/off by Door open/close
- DC12V, 60Pcs/M 2835 Chips

Specification:

Light Color	Wattage (W)	Power Input	Lumen (lm)	Length	CRI
3000k/Warm white	3/4.5	DC12V	180/270	563/862	≥90
4000k/Cool white	3/4.5	DC12V	180/270	563/862	≥90
6000k/Day light	3/4.5	DC12V	180/270	563/862	≥90

If input AC100-240V, need to add external LED driver (LD38/LD39)

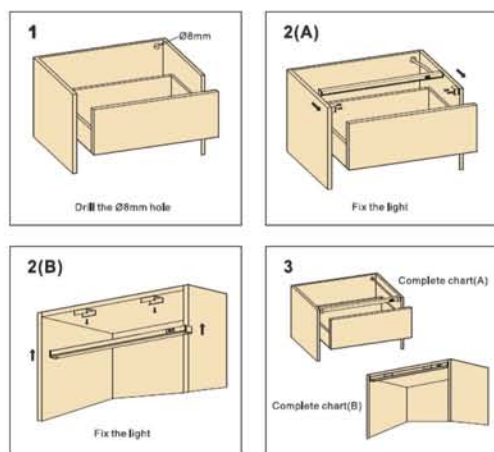

Item No	Description	Photo
EASM1103	Stainless Steel Mounted Clip	
EASM1104	Plastic Mounted Clip	

Applications: Suitable for drawer or wardrobe / Cabinet
Accessory: LED driver, cable and connector

LED SMD mirror light



EAYD14011



Features:

- LED SMD: 2835 x 72pcs
- Dimension: 740 x 110 x 35mm
- Input: DC12V
- Emitting color: White (5000-6500K), Warm White(2500-4200K)
- Ra: 80
- Power: 12W
- Material: Chrome Plated Aluminium
- Luminous Flux: 450-500lm




EAYD14008




Features:

- LED SMD: 2835x72pcs
- Dimension: 600x110x35mm
- Input: DC12V
- Emitting color: White (5000-6500K), Warm White(2500-4200K)
- Ra: 80
- Power: 12W
- Material: Chrome Plated Alu
- Luminous Flux: 450-500lm

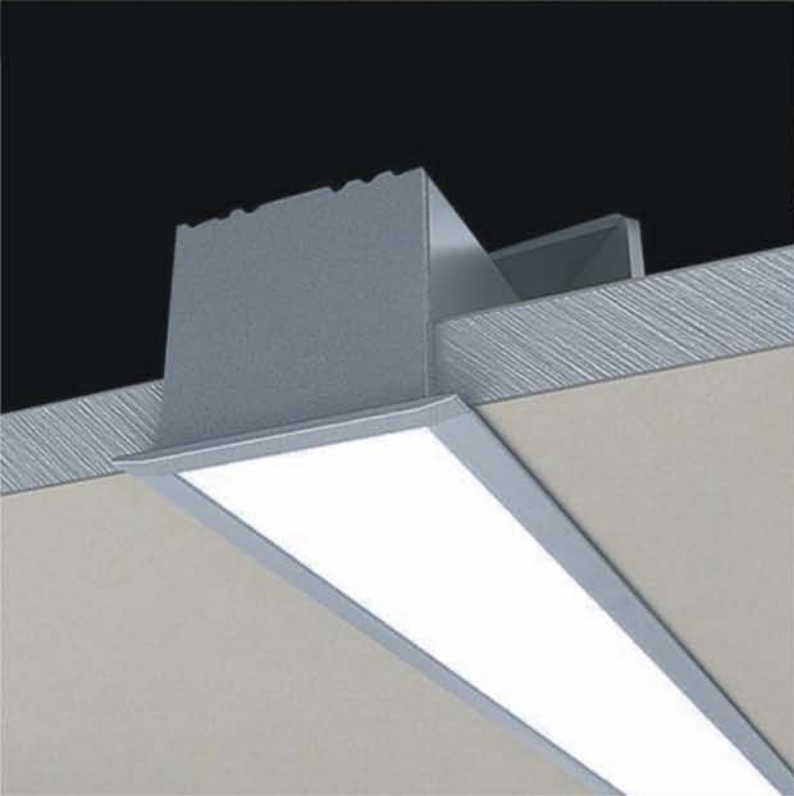

EAAP09

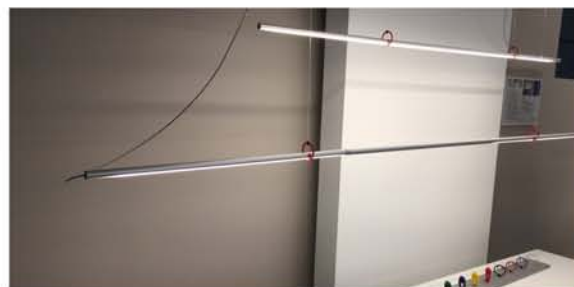

EAEC29

Milky, Frosted



EASM29



Features:

- Length can be customized
- High quality PC cover make light more homogenous
- Round shape design can supply surface mounted or as hanging line, multiple usage than the other
- Aluminium body - AL6063
- Installation: Surface Mounted
- Size: 20x8.8mm
- Length: 0.5 to 2.5m

Item No.	Type	Item No.	Type
EAAP09/M	Milky Cover	EAEC29	End Cap for EAAP09
EAAP09/F	Frosted Cover	EASM29	Support bracket for EAAP09


EAAP21



EAEC11



Frosted Milky



EAAP21 Dimension

EASM12	90° Clip	EASM13	45° Clip
--------	----------	--------	----------

Features:

- Length can be customized
- High quality PC cover make light more homogenous
- Rectangular shape design can supply surface mounted or as hanging line, multiple usage than the other
- Aluminium body - AL6063
- Installation: Surface Mounted & Recessed
- Size: 23x13mm
- Length: 0.5 to 2.5m

Item No.	Type	Item No.	Type
EAAP21/M	Milky Cover	EAEC11	End Cap for EAAP21
EAAP21/F	Frosted Cover	EASM12/EASM13	Support bracket for EAAP21

Application: Furniture lighting, store shelf lighting, window display light, stair light, cabinet shelves, display cabinet, wine cabinet

EAAP25





Features:

- Length can be customized
- High quality PC cover make light more homogenous
- Rectangular shape design can supply surface mounted or as hanging line, multiple usage than the other
- Aluminium body - AL6063
- Installation: Surface Mounted & Recessed
- Size: 23x8.5mm
- Length: 0.5 to 2.5m



EAEC17



Item No.	Type	Item No.	Type
EAAP25/M	Milky Cover	EAEC17	End Cap for EAAP25
EAAP25/F	Frosted Cover	EASM12/EASM13	Support bracket for EAAP25

EAAP22




Features:

- Length can be customized
- High quality PC cover make light more homogenous
- Exquisite makes wider range of use than the others
- Aluminium body - AL6063
- Installation: Surface Mounted
- Size: 18x13mm
- Length: 0.5 to 2.5m



EAEC12




Item No.	Type	Item No.	Type
EAAP22/M	Milky Cover	EAEC12	End Cap for EAAP22
EAAP22/F	Frosted Cover	EASM12/EASM13	Support bracket for EAAP22

Application: Furniture lighting, store shelf lighting, window display light, stair light, cabinet shelves, display cabinet, wine cabinet

EAAP24



EAEC18



EAAP24 Dimension



Features:

- Length can be customized
- High quality PC cover make light more homogenous
- Exquisite makes wider range of use than the others
- Aluminium body - AL6063
- Installation: Surface Mounted
- Size: 18x8.5mm
- Length: 0.5 to 2.5m

Item No.	Type	Item No.	Type
EAAP24/M	Milky Cover	EAEC18	End Cap for EAAP22
EAAP24/F	Frosted Cover	EASM12/EASM13	Support bracket for EAAP22


EAAP28



EAEC14



Milky



EAAP28 Dimension



Features:

- Length can be customized
- High quality PC cover make light more homogenous
- Exquisite makes wider range of use than the others
- Aluminium body - AL6063
- Installation: Surface Mounted
- Size: 18x18mm
- Length: 0.5 to 2.5m

Item No.	Type	Item No.	Type
EAAP28/M	Milky Cover	EAEC14	End Cap for EAAP28
		EASM12/EASM13	Support bracket for EAAP28

Application: Furniture lighting, store shelf lighting, window display light, stair light, cabinet shelves, display cabinet, wine cabinet


EAAP29



EAEC15



Milky



EAAP29 Dimension



Features:

- Length can be customized
- High quality PC cover make light more homogenous
- Exquisite makes wider range of use than the others
- Aluminium body - AL6063
- Installation: Surface Mounted
- Size: 17.5x18mm
- Length: 0.5 to 2.5m

Item No.	Type	Item No.	Type
EAAP29/M	Milky Cover	EAEC15	End Cap for EAAP29
		EASM12/EASM13	Support bracket for EAAP29


EAAP58



EAEC59



Milky



EAAP58 Dimension



Features:

- Length can be customized
- High quality PC cover make light more homogenous
- Exquisite makes wider range of use than the others
- Aluminium body - AL6063
- Installation: Surface Mounted
- Size: 21.5x18mm
- Length: 0.5 to 2.5m


Item No.	Type	Item No.	Type
EAAP58/M	Milky Cover	EAEC59	End Cap for EAAP58
		EASM12/EASM13	Support bracket for EAAP58

Application: Furniture lighting, store shelf lighting, window display light, stair light, cabinet shelves, display cabinet, wine cabinet

EAAP45



EAEC45





Features:

- Length can be customized
- High quality PC cover make light more homogenous
- Exquisite makes wider range of use than the others
- Aluminium body - AL6063
- Installation: Surface Mounted & Recessed
- Color: Silver, Black
- Size: 18x12mm
- Length: 0.5 to 2.5m

Item No.	Type	Item No.	Type
EAAP45/M	Milky Cover	EAEC45	End Cap for EAAP45
EAAP45/F	Frosted Cover		

EAAP61

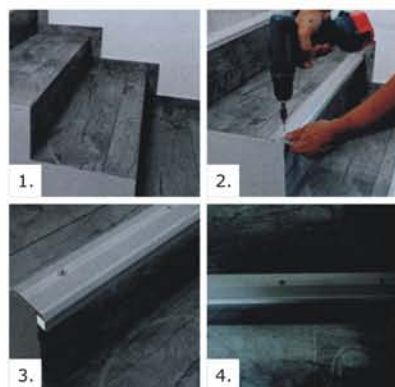

Features:

- Length can be customized
- Nice appearance, anti-skid
- High quality PC cover make light more homogenous
- Exquisite makes wider range of use than the others
- Aluminium body - AL6063
- Installation: Surface Mounted
- Size: 80x22mm


Item No.	Type
EAAP61/M	Milky Cover
EAAP61/F	Frosted Cover

Application: Furniture lighting, store shelf lighting, window display light, stair light, cabinet shelves, display cabinet, wine cabinet

EAAP51



EAEC51



Features:


- Length can be customized
- High quality PC cover make light more homogenous
- Exquisite makes wider range of use than the others
- Aluminium body - AL6063
- Installation: Surface Mounted & Recessed
- Color: Silver
- Size: 22x5mm
- Length: 0.5 to 2.5m

Item No.	Type	Item No.	Type
EAAP51/M	Milky Cover	EAEC51	End Cap for EAAP51
EAAP51/F	Frosted Cover		

EAAP44



EAEC44




Features:

- Length can be customized
- High quality PC cover make light more homogenous
- Exquisite makes wider range of use than the others
- Aluminium body - AL6063
- Installation: Surface Mounted & Recessed
- Color: Silver, Black
- Size: 18x8mm
- Length: 0.5 to 2.5m


Item No.	Type	Item No.	Type
EAAP44/M	Milky Cover	EAEC44	End Cap for EAAP44
EAAP44/F	Frosted Cover		

Application: Furniture lighting, store shelf lighting, window display light, stair light, cabinet shelves, display cabinet, wine cabinet

EAAP46

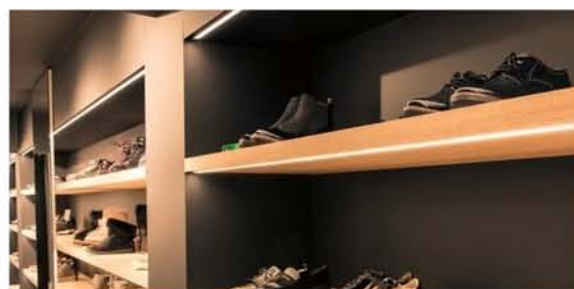

EAEC46



Features:


- Length can be customized
- High quality PC cover make light more homogenous
- Exquisite makes wider range of use than the others
- Aluminium body - AL6063
- Installation: Surface Mounted & Fix by Clip
- Color: Silver, Black
- Size: 15x8mm
- Length: 0.5 to 2.5m

Item No.	Type	Item No.	Type
EAAP46/M	Milky Cover	EAEC46	End Cap for EAAP46
EAAP46/F	Frosted Cover		

EAAP23



EAEC23



EAAP23 Dimension




Features:

- Length can be customized
- High quality PC cover make light more homogenous
- Exquisite makes wider range of use than the others
- Aluminium body - AL6063
- Installation: Surface Mounted & Fix by Clip
- Color: Silver
- Size: 22x20mm
- Length: 0.5 to 2.5m

Item No.	Type	Item No.	Type
EAAP23M	Milky Cover	EAEC23	End Cap for EAAP23
EAAP23/F	Frosted Cover	EASM58/EASM10/EASM11	Support bracket for EAAP23

Application: Furniture lighting, store shelf lighting, window display light, stair light, cabinet shelves, display cabinet, wine cabinet

EAAP59



EAAP59 Dimension

EASM58	Stainless steel clip	EASM10	Stainless steel clip	EASM11	PC clip
--------	----------------------	--------	----------------------	--------	---------





Features:

- Length can be customized
- High quality PC cover make light more homogenous
- Exquisite makes wider range of use than the others
- Aluminium body - AL6063
- Installation: Surface Mounted & Fix by Clip
- Color: Silver
- Size: 22x16mm
- Length: 0.5 to 2.5m

EAEC59

Item No.	Type	Item No.	Type
EAAP59M	Milky Cover	EAEC59	End Cap for EAAP59
EAAP59/F	Frosted Cover	EASM58/EASM10/EASM11	Support bracket for EAAP59

EAAP16

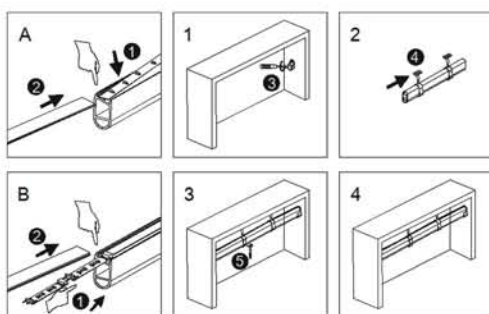

Features:

- Length can be customized
- High quality PC cover make light more homogenous
- Installation: Mounted with stainless steel holder
- Aluminium body - AL6063-T5
- PC Cover: Frost, Transparent, Milky
- Range width: within 12mm
- Length: 0.5 to 2.5m

Accessory:


Item No.	Type
EAAP16/M	Milky Cover
EAAP16/F	Frosted Cover



Item No.	Description	
EASM09	Rail Support	
EASM08	Rail Support	

Application: Furniture lighting, store shelf lighting, window display light, stair light, cabinet shelves, display cabinet, wine cabinet

EAAP70




Features:


- Length can be customized
- High quality PC cover make light more homogenous
- 5mm Shining upward and downwards for rear board
- Aluminium body - AL6063
- Comes with 3M VHB tape, easy installation
- Color: Silver, Black
- Size: 16x18.2mm
- Length: 0.5 to 2.5m

Application:

- For shelves, display cabinet, kitchen cabinet, wine cabinet etc.

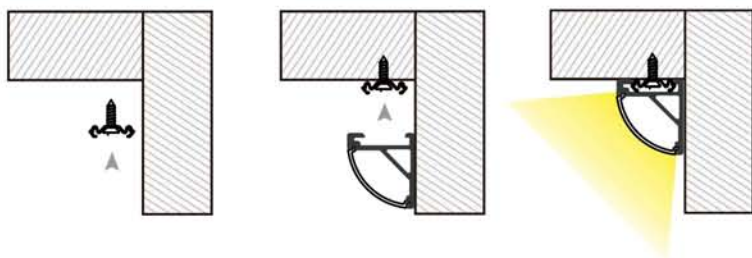

EAAP72




Features:

- Length can be customized
- High quality PC cover make light more homogenous
- 8mm Ultra-thin design, only 8mm without edge
- Aluminium body - AL6063
- Comes with 3M VHB tape, easy installation
- Color: Silver, Black, Champagne Gold
- Size: 12.5x8mm
- Length: 0.5 to 2.5m

Application:

- For shelves, display cabinet, kitchen cabinet, wine Cabinet etc.



1. 13mm, 8mm
Slotting dimension
13mm width
8mm depth

2. Recessed mounted,
or install with glue

With double sided tape

EAAP72B




Features:

- No visible light dots, Uniform and soft
- Suitable for 6-8mm thick plate glass or acrylic plate
- Anodise surface, fine and superior
- PC cover for straight glowing is available
- Aluminium body - AL6063
- Color: Silver, Black, Champagne Gold
- Size: 12.5x25mm
- Length: 0.5 to 2.5m

Application:

- For shelves, display cabinet, kitchen cabinet, wine cabinet etc.

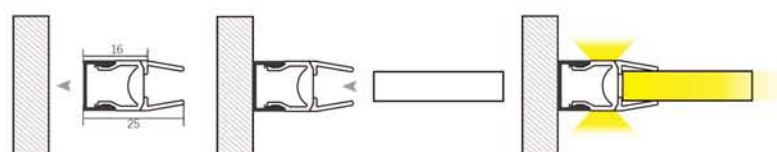


1. Cut 16mm width of the glass board

2. 6-8mm Thickness of glass board

3. Clamp the glass, or fix with double side tape

EAAP72H

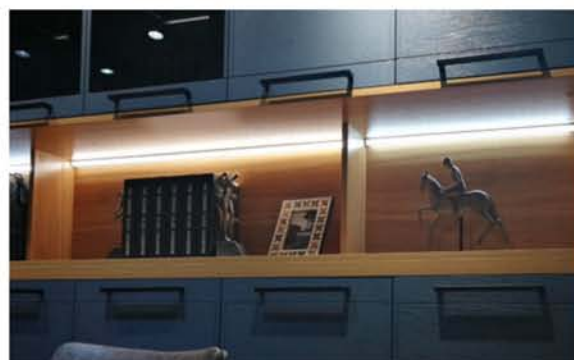


Features:

- No visible light dots, Uniform and soft
- Suitable for 6-8mm thick plate glass or acrylic plate
- Anodise surface, fine and superior
- PC cover for straight glowing is available
- Aluminium body - AL6063
- Color: Silver, Black, Champagne Gold
- Size: 12.5x17.5mm
- Length: 0.5 to 2.5m

Application:

- For shelves, display cabinet, kitchen cabinet, wine Cabinet etc.

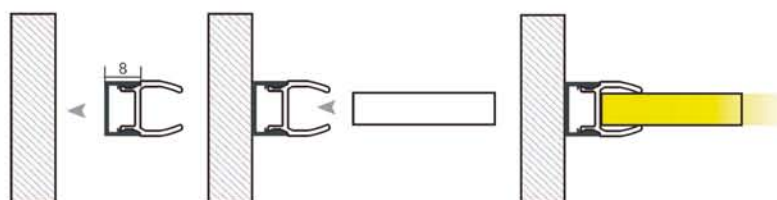

1. Cut 16mm width of the glass board

2. 6-8mm Thickness of glass board

3. Clamp the glass, or fix with double sided tape

EAAP82




Features:


- 45° angle shines into the cabinet
- Recessed lighting for superior luminous effect
- Aluminium body - AL6063
- Color: Silver, Black, Champagne Gold
- Size: 20x18mm
- Length: 0.5 to 2.5m

Application:

- For shelves, display cabinet, kitchen cabinet, wine cabinet, wardrobe etc.




1. Slotting dimensions 18mm width
10mm Depth

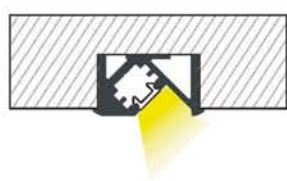

2. Recessed mounted, or install with
glue

EAAP83

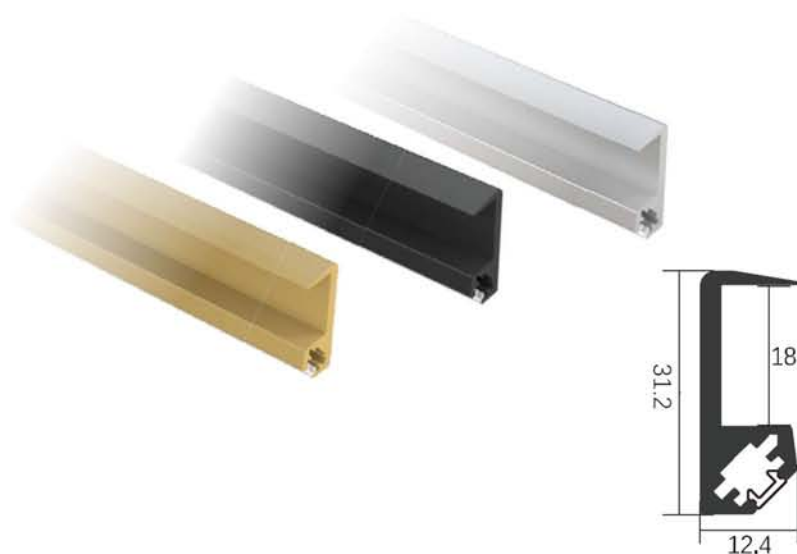


Features:


- Clamping the front of the 18mm thick board, 45° angle shines into the cabinet
- Recessed lighting for superior luminous effect
- Aluminium body - AL6063
- Color: Silver, Black, Champagne Gold
- Size: 12.4x31.2mm
- Length: 0.5 to 2.5m

Application:

- For shelves, display cabinet, kitchen cabinet, wine Cabinet etc.






1. Cut 3mm thick of the board to parallel
other boards




2. Clamp 18mm thick board, or install with
glue

EAAP86

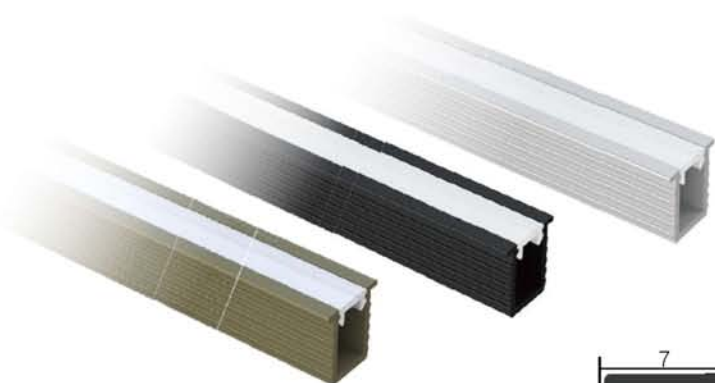

1. Slotting dimension 18mm width
8mm depth

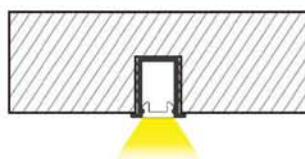

2. Recessed mounted, or install with .
glue





Features:

- Ultra-narrow luminous surface, only 5mm width
- Ultra-thin 0.6mm thick edge, easy to hide and install
- No visible light dots, uniform and soft lighting
- Aluminium body - AL6063
- Color: Silver, Black, Champagne Gold
- Size: 9x7mm
- Length: 0.5 to 2.5m


Application:

- For shelves, display cabinet, kitchen cabinet, wine cabinet, wardrobe etc.

EAAP87



1. Slotting dimension 15mm width
5mm depth

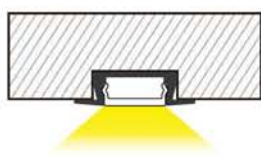

2. Recessed mounted
or install with glue



Features:

- Ultra-thin design, Slot depth is only 5mm
- PC cover is snap fit
- Hand wave sensor is available
- Aluminium body - AL6063
- Color: Silver, Black
- Size: 22x6mm
- Length: 0.5 to 2.5m


Application:

- For shelves, display cabinet, kitchen cabinet, wine Cabinet, wardrobe etc.



Slotting length is the total length of
the light minus 18mm

EAAP89

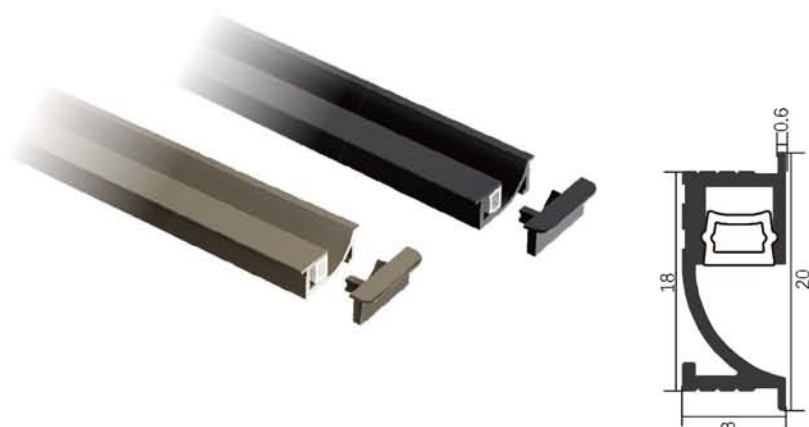

Features:

- Use curvy design to guide light source, creating soft illumination
- Ultra-thin 8mm thick design for various applications
- Ultra thin 0.6mm tick edge, integrating with the cabinet
- Aluminium body - AL6063
- Color: Black, Champagne Gold
- Size: 20x8mm
- Length: 0.5 to 2.5m

Application:

- Ambient illumination. For display cabinet, Kitchen cabinet, wardrobe, wine cabinet, etc

1. Slotting dimension 18mm width
8mm depth

2. Recessed mounted, or install with glue

1. Slotting dimension 18mm width
8mm depth

2. Install the elastic piece,
and then insert it into the slot

EAAP90



Features:

- Shining upwards and downwards for rear board
- Perfect for 18mm thick board
- Comes with VHB 3M tape, easy installation
- No slot opening, punch on the PC cover
- Aluminium body - AL6063
- Color: Black, Champagne Gold
- Size: 18.8x13.2mm
- Length: 0.5 to 2.5m

Application:


- Ambient illumination. For display cabinet, wardrobe, wine cabinet, bookshelf, etc

1. Cut 14mm width of the rear board

2. Split the VHB tape

Punch on the PC cover for wiring
through back board

EAAP91

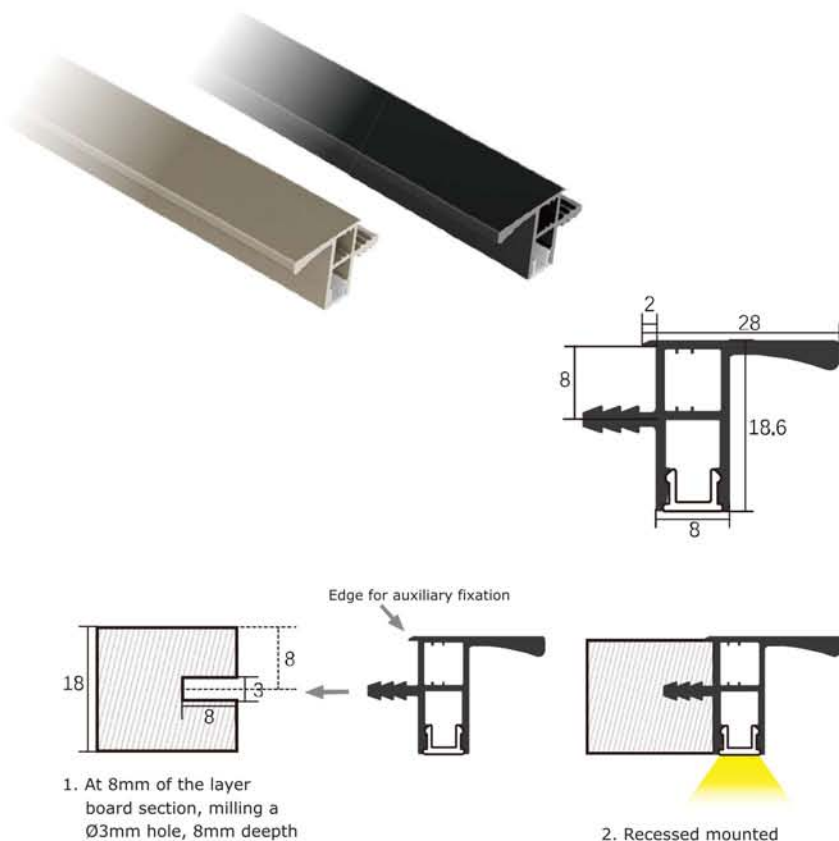


Features:

- Free handle design with curvy surface
- Ultra-thin design by matching with 5mm width light strip
- No visible light dots, uniform and soft lighting
- Suitable for 18mm thick board
- Aluminium body - AL6063
- Color: Black, Champagne Gold
- Size: 18.6x8mm
- Length: 0.5 to 2.5m

Application:

- Ambient illumination. For display cabinet, Kitchen cabinet, wardrobe, wine cabinet, etc

EAAP92

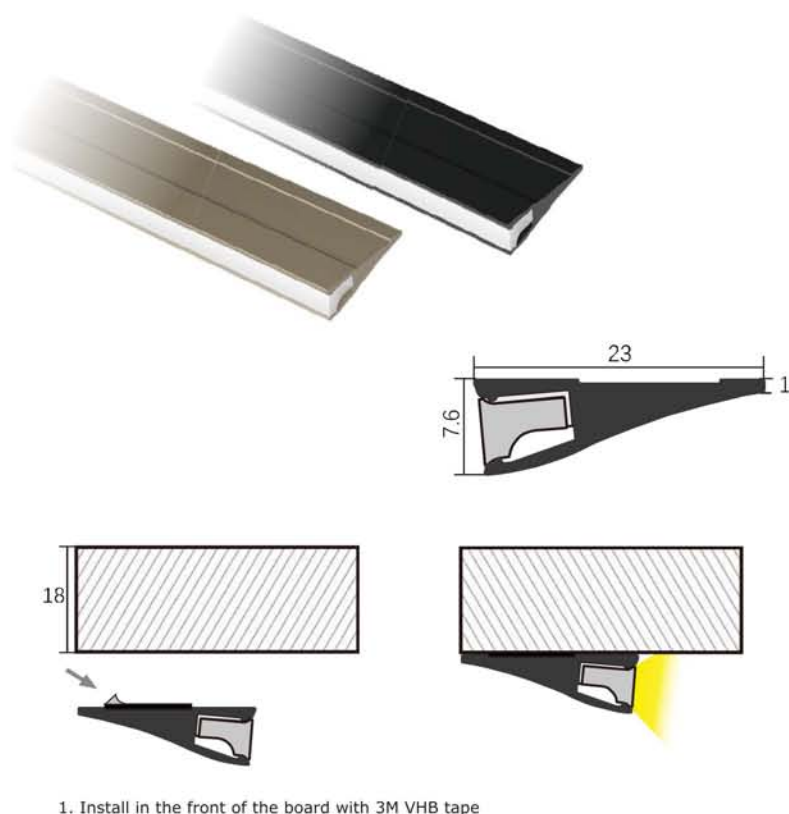



Features:

- Thinnest part in only 1mm thick, comfortable touching with curve surface
- Hidden light design, 30° angle shines into the cabinet
- Comes with VHB 3M tape, easy installation
- Surface mounted with double sided tape, no slot opening
- Aluminium body - AL6063
- Color: Black, Champagne Gold
- Size: 23x7.6mm


Application:

- Ambient illumination. For display cabinet, wardrobe, wine cabinet, bookshelf, etc

EACV16L

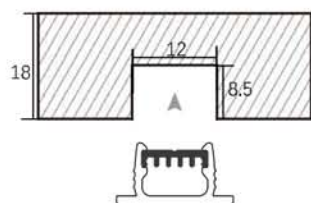

1. Slotting dimension 18mm width, 8mm depth

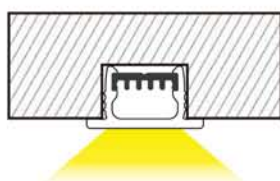

2. Recessed mounted, or install with glue





Features:

- PC cover contains the edge
- Hand wave sensor is available
- Can be used for decorative illumination
- Aluminium body - AL6063
- Color: Silver, Black
- Size: 17.8x8.5mm
- Length: 0.5 to 2.5m


Application:

- Ambient illumination. For display cabinet, Kitchen cabinet, wardrobe, wine cabinet, etc

EACV16S



1. Slotting dimension 10mm width, 10mm depth

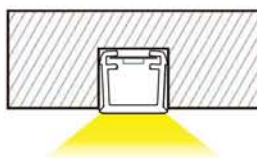

2. Recessed mounted



Features:

- Full PC cover design
- High-quality matte surface treatment, excellent texture
- Embed the 8mm width light strip, easy and efficient
- Milky white and dark grey are available
- Aluminium body - AL6063
- Color: Silver, Black
- Size: 11.5x8mm

Application:

- Decorative illumination. For shopping center, hotel living room, display cabinet, etc

EAAP48





Features:

- Surface: Anodized aluminium
- PC Cover: Frost, Transparent, Milky
- Installation: Surface mounted with screw or clip
- Aluminium body - AL6063
- Color: White
- Size: 15.4x7mm
- Length: 0.5 to 2.5m

Application:

- Indoor / Furniture / Store shelf / Window display / Exhibition booth / Cove / Bias etc.

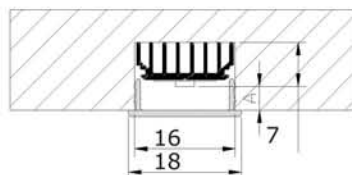

EACV17




Features:

- Material: Plastic
- Color: Transparent
- Size: 12.5x10.7mm

Application:

- Indoor / Furniture / Store shelf / Window display / Exhibition booth / Cove / Bias etc.

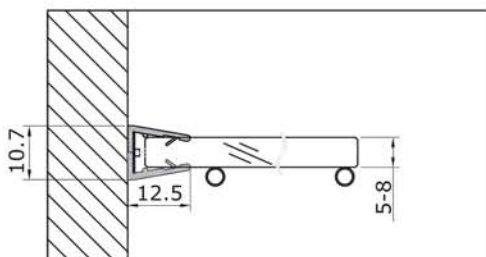

EAID01



Features:



- Single door sensor switch
- Dimension: Ø15mmx12mm
- Working voltage: 12V-24V
- Current loading: Max 3A
- Sensor range: 30-80mm (Brown board)
- Standby power: 0.2W
- Installation: Recessed mounted
- Power: 12V-30W

EAID05



Features:

- Double door sensor switch
- Dimension: Ø15mmx12mm
- Working voltage: 12V-24V
- Current loading: Max 3A
- Sensor range: 30-80mm (Brown board)
- Standby power: 0.2W
- Installation: Recessed mounted
- Power: 12V-30W



EAID08



Features:


- Three door sensor switch
- Dimension: Ø15mmx12mm
- Working voltage: 12V-24V
- Current loading: Max 3A
- Sensor range: 30-80mm (Brown board)
- Standby power: 0.2W
- Installation: Recessed mounted
- Power: 12V-30W

EAID02



Features:

- Single door sensor switch
- Dimension: 30mmx23mmx7.5mm
- Working voltage: 12V-24V
- Current loading: Max 3A
- Sensor range: 30-80mm (Brown board)
- Standby power: 0.2W
- Installation: Surface mounted
- Power: 12V-30W



EAID06



Features:

- Double door sensor switch
- Dimension: 30mmx23mmx7.5mm
- Working voltage: 12V-24V
- Current loading: Max 3A
- Sensor range: 30-80mm (Brown board)
- Standby power: 0.2W
- Installation: Surface mounted
- Power: 12V-30W




EAID03



Features:

- Single door sensor switch
- Dimension: 50mmx50mmx7.5mm
- Working voltage: 12V-24V
- Current loading: Max 3A
- Sensor range: 30-80mm (Brown board)
- Standby power: 0.2W
- Installation: Surface mounted
- Power: 12V-30W




EAIH01



Features:

- Dimension: Ø15mmx12mm
- Working voltage: 12V-24V
- Current loading: Max 3A
- Sensor range: 30-100mm (Brown board)
- Standby power: 0.2W
- Installation: Recessed mounted
- Power: 12V-30W



EAIH02



Features:

- Dimension: 30mmx23mmx7.5mm
- Working voltage: 12V-24V
- Current loading: Max 3A
- Sensor range: 30-100mm (Brown board)
- Standby power: 0.2W
- Installation: Surface mounted
- Power: 12V-30W




EAIH03



Features:

- Dimension: Ø55mmx8mm
- Working voltage: 12V-24V
- Current loading: Max 3A
- Sensor range: 30-100mm (Brown board)
- Standby power: 0.2W
- Installation: Surface mounted
- Power: 12V-30W



EAIH04



Features:

- Dimension: 50mmx50mmx8mm
- Working voltage: 12V-24V
- Current loading: Max 3A
- Sensor range: 30-100mm (Brown board)
- Standby power: 0.2W
- Installation: Surface mounted
- Power: 12V-30W




EAPR01



Features:

- Dimension: Ø18mmx12mm
- Working voltage: 12V-24V
- Bearing loading: Max 3A
- Inductive distance: Max 3m
- Standby power: 0.01W
- Installation: Recessed mounted
- Power: 12V-30W

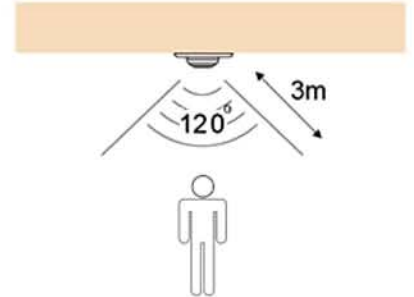


EAPR02



Features:

- Dimension: Ø55mmx8mm
- Working voltage: 12V-24V
- Bearing loading: Max 3A
- Inductive distance: Max 3m
- Standby power: 0.01W
- Installation: Recessed mounted
- Power: 12V-30W



EAPR02S Light Sensor



Features:

- Dimension: Ø55mmx8mm
- Working voltage: 12V-24V
- Bearing loading: Max 3A
- Inductive distance: Max 3m
- Standby power: 0.01W
- Installation: Recessed mounted
- Working environment: Dark scene
- Power: 12V-30W




EATS01



Features:

- Dimension: Ø15mmx25mm
- Working voltage: 12V-24V
- Bearing current: Max 3A
- The way of dimmer: 1 Switch, 2 Subsection, 3 circulation
- Standby power: 0.01W
- Installation: Recessed mounted
- Power: 12V-30W




EATS02



Features:

- Dimension: 50mmx50mmx8mm
- Working voltage: 12V-24V
- Bearing current : Max 3A
- The way of dimmer: 1 Switch, 2 Subsection, 3 circulation
- Standby power: 0.01W
- Installation: Surface mounted
- Power: 12V-30W




EATS03



Features:

- Dimension: Ø18mmx26mm
- Working voltage: 12V-24V
- Bearing current : Max 3A
- The way of dimmer: 1 Switch, 2 Subsection, 3 circulation
- Standby power: 0.01W
- Installation: Recessed mounted
- Power: 12V-30W




EAID13

Built in switch universal push button



Features:

- 240V-AC
- Material: Plastic
- Finish: Black



EAL806-6



EACC27



Specification:

Item no.	EACC27	EALB06-6
Description	JST female/male plug for DC 12V system	JST 6 way distributor box for DC 12V system
Dimensions	Female (25x7x6mm)	41.5x38x10mm
	Male (15x5x2.6mm)	

1. With the female and male DC12V connector system, it is easier to connect the LED driver and LED lamps, and extending distance from the LED driver to LED lamps (the lead cable max 6M).

2. With the 3/6 way paralleling distributor box, up to 2- 3/6 additional lights can be added from one LED driver.

EADR15 (12V-18W)



Power output	18W
Input	100~240V, 50~60HZ
Output	DC12V
Color	White/Black
Demension (LxWxHmm)	110x44.5x15mm

EADR35 (12V-35W)

EADR60 (12V-60W)




Item No.	EADR35-12V	EADR60-12V
Power output	35W	60W
Input	100~240V, 50~60HZ	
Output	DC12V	DC12V
Color	White/Black	
Demension (LxWxHmm)	110x44.5x15mm	149x44.5x15mm

LED Driver System


Installation Steps

1




Post the 3M tape (0.4mm) on the bottom of the driver.

1A




Fix the driver onto the suitable place with screws.

2




Press the screw caps into the screw holes on the top of the driver.

3




Tear off the protective foil of the adhesive tape.

4




Adhere the driver onto the proper position.

5

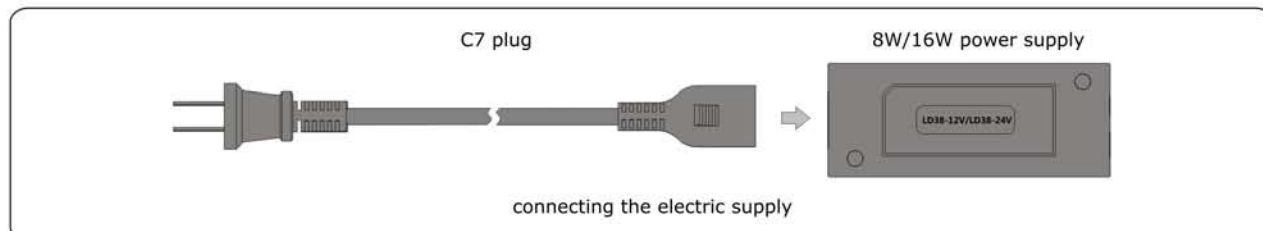

6

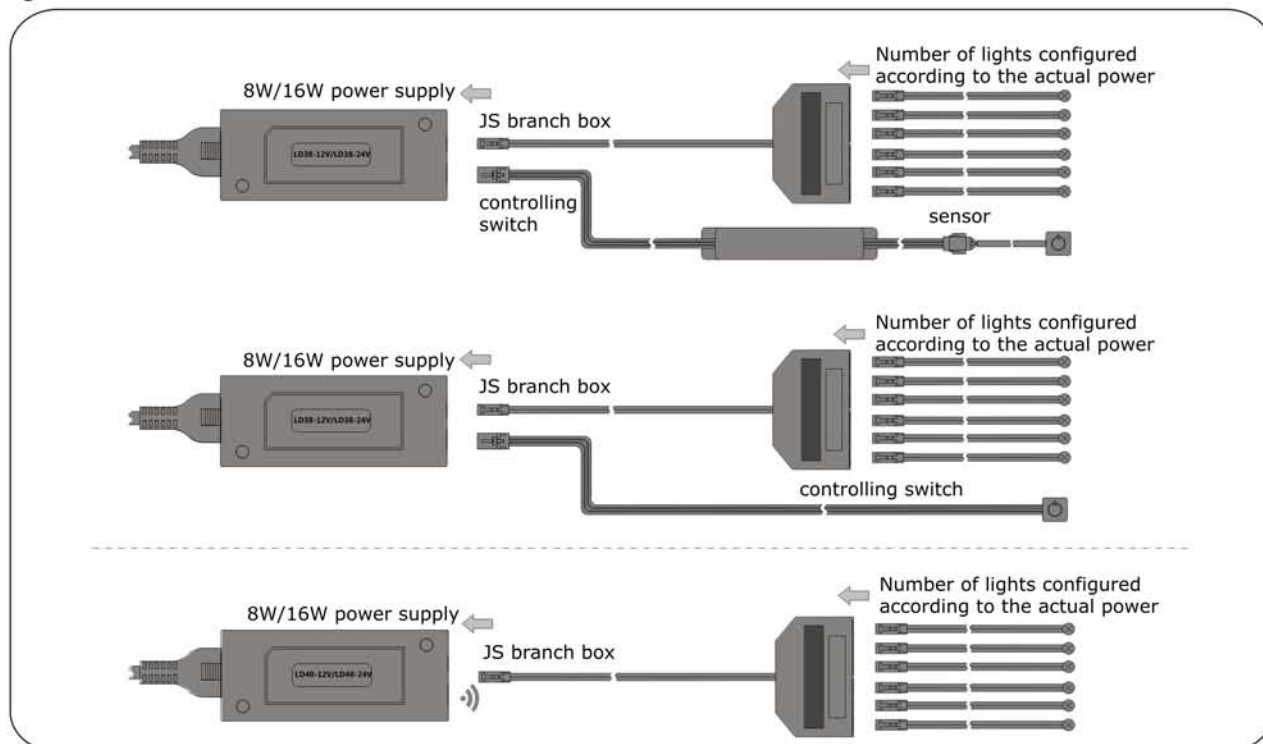

LED Power Supply

EALD40

8W LED
8W LED Power Supply



EALD41

18W LED
18W LED Power Supply




EALD42

50W LED
50W Ultra-thin LED Power Supply




EALD43

90W LED
90W Ultra-thin LED Power Supply

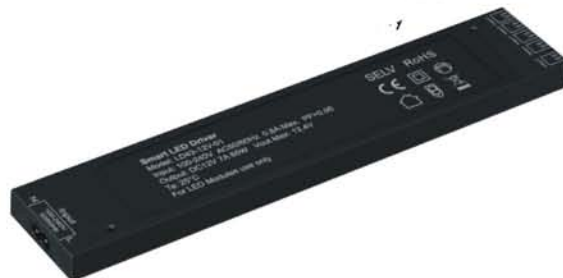


Item no.	Input Voltage	Output Voltage	Power	Interference Quantity	Dimension	Function options
EALD40	100-240V	12V	8W	1	111x44.5x15mm	Supporting wire & Dual color temperature control
EALD41	100-240V	12V	18W	1	149x44.5x15mm	
EALD42	100-240V	12V	50W	3	308x44x16mm	
EALD43	100-240V	12V	90W	5	308x60x16mm	


Installation

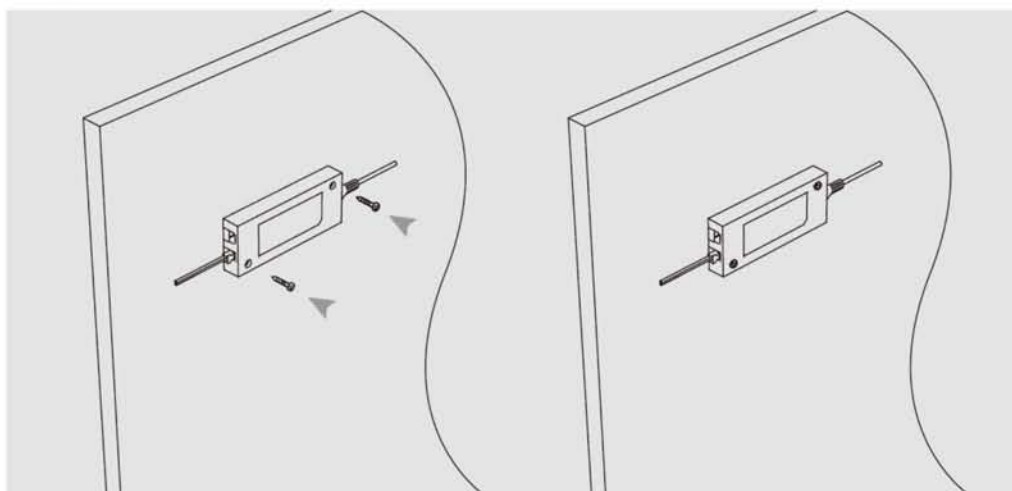


Wireless Connection Solution

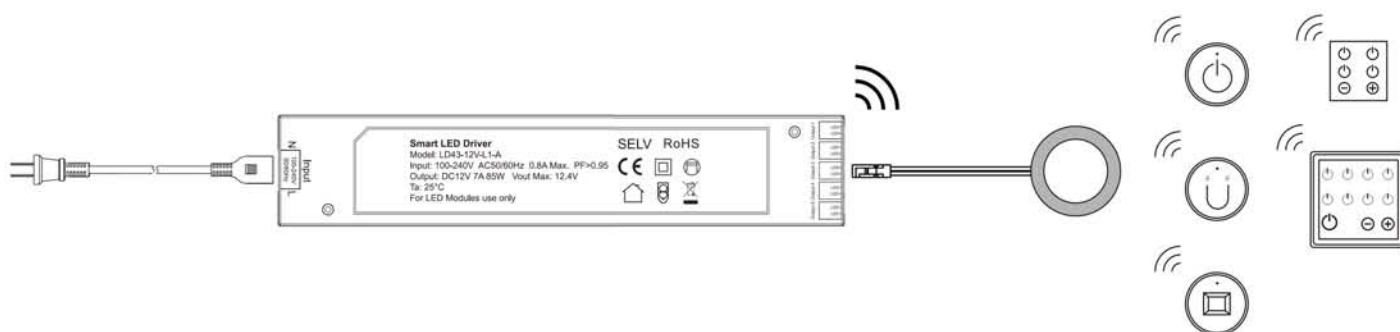


Wireless Connection Solution for multi white

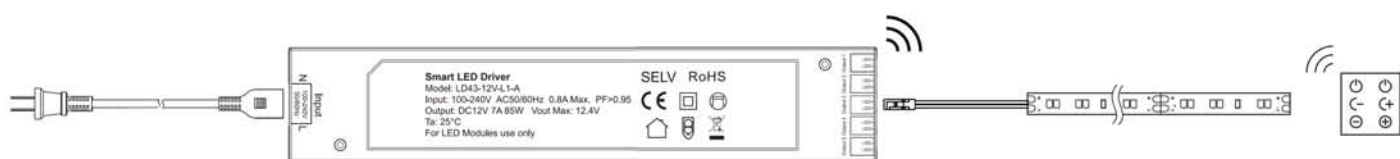

One to many

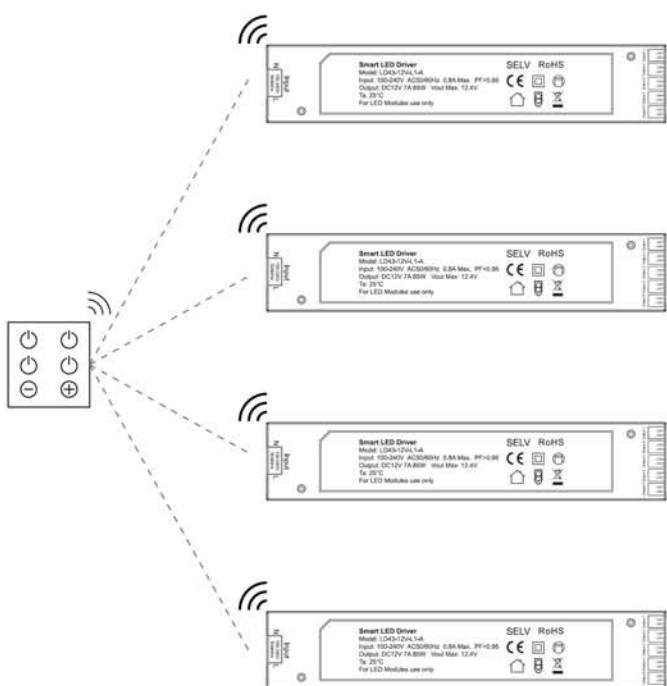

Many to one

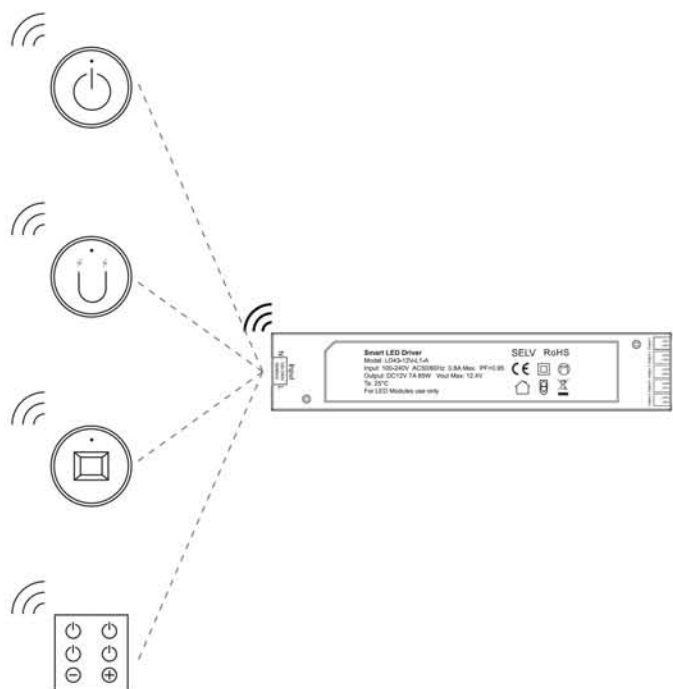

Wireless Sensor Switches


EATS14

Wireless touch sensor switch


EAPR08

Wireless P.I.R. sensor switch


EAID11

Wireless door sensor switch (Magnetic)

Item no.	Dimensions	Power supply	Control numbers	Battery working time
EATS14	Ø40xH16mm	CR3032 Battery	256 Power supplies	12-24 Months
EAPR08	Ø40xH16mm	CR3032 Battery	256 Power supplies	12-24 Months
EAID11	Ø40xH16mm	CR3032 Battery	256 Power supplies	12-24 Months

Installation


Recessed mounted



Surface mounted




Wireless Sensor Switches

EATS15


Wireless dimmer touch pad
(4 Channels)

EATS24

EATS16


Wireless dual-CCT dimmer touch pad
(2 Channels)

EATS23


EATS20


Wireless dimmer touch pad
(8 Channels)


Item no.	Dimensions	Power supply	Control numbers	Battery working time
EATS15	51x51x6.7mm	CR3032 Battery	256 Power supplies	12-24 Months
EATS16	51x51x6.7mm	CR3032 Battery	256 Power supplies	12-24 Months
EATS23	86x40x6.5mm	CR2025 Battery	256 Power supplies	9-18 Months
EATS24	86x40x6.5mm	CR2025 Battery	256 Power supplies	9-18 Months
EATS20	100x100x7mm	5V - 24V	256 Power supplies	

Installation

Double sided tape fixed

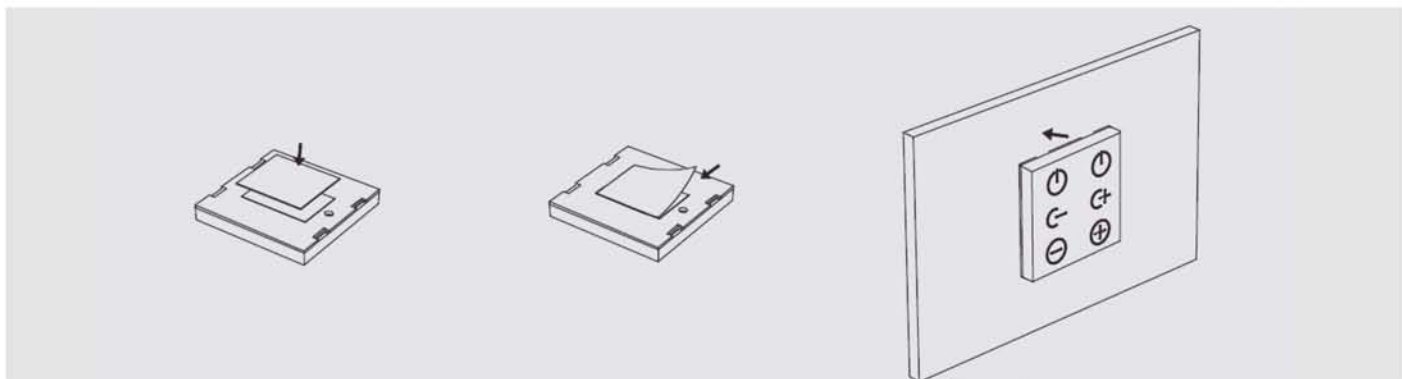

Surface mounted

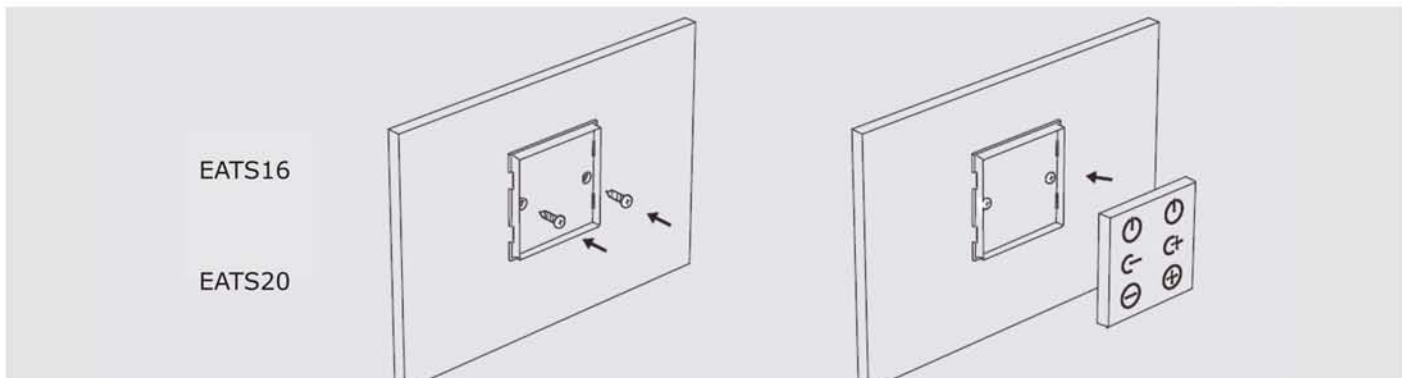

Wireless Receivers



EAWL01-A



EAWL01-B





EAWL02-12V




EAWL02-24V

Item no.	Dimensions	Power supply	Control numbers	Battery working time
EAWL01-A	86x15xH8mm	12-24V DC	60W/120W	Wifi dimmer adjust
EAWL01-B	86x15xH8mm	12-24V DC	60W/120W	CCT Adjust (3-pin)
EAWL02-12V	50x50xH8mm	12V DC	60W	CCT Adjust (2-pin)
EAWL02-12V	50x50xH8mm	12V DC	120W	CCT Adjust (2-pin)

Installation

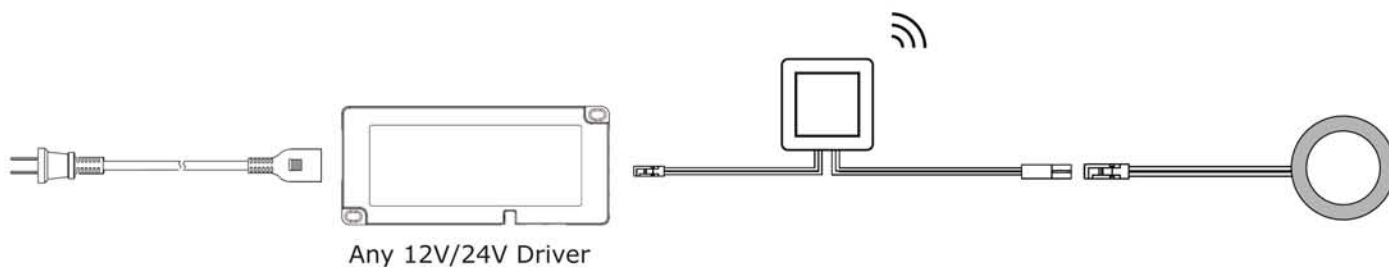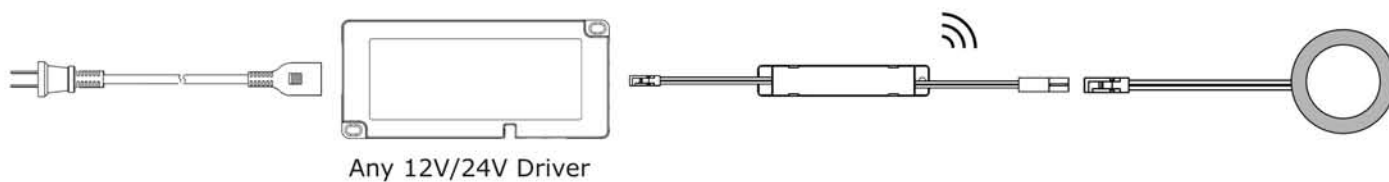

EuroArt Wireless Switches

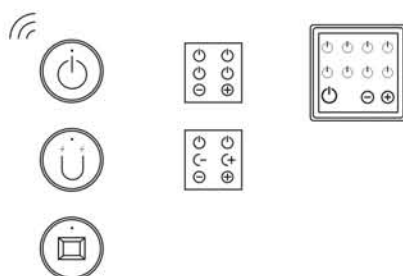



■ Popup Socket

Pop up socket



Features

- Production dimension: 266x130x67mm
- Cut out dimension: 266x130x7mm
- Material: Zinc alloy & Steel plate.
- Configuration: U.K. power outlet, 3.5mm audio, HDMI, VGA, USB data transfer etc.

Ref.	Description	Finish
EADF-601	Pop up socket	Silver, Black

Automatic Pop up socket



Features

- Panel: Just press the top panel to open and close
- Production dimension: 113mm
- Cut out dimension: 100mm
- Configuration: U.K. power outlet, AUX, HDMI, VGA, USB fast charging etc.

Ref.	Description	Finish
EADF-901	Automatic Pop up socket	Silver

Manual Pull Pop up socket



Features

- Flexible product installation, can be installed in vertical and horizontal.
- Products for the design of the hidden drawing type
- Simple product hole, just a circular hole in the desktop

Ref.	Description	Finish
EADF-913	Manual Pop up socket	Silver, Black

Aluminium Alloy Grommet box



Features

- Material: Aluminium alloy
- Surface Treatment: Baking finish
- Regular Colors: White, Silver
- Hydraulic buffer, Soft open and close
- Brush to fix the cables and keep just
- Dimension: 300x127x28mm (Customize length)
- Cut of size: 291x110x26mm (Suggestion)

Ref.	Description	Finish
EADF-913	Grommet Box	Silver

Double sided Damping Grommet Box



Features

- Material: Aluminium alloy
- Surface Treatment: Oxidization
- Regular Colors: Silver
- Gear buffer design
- 2.8mm thickness aluminium to avoid out of shape
- Brush to fix the cables and keep dust away
- Double sided design
- Dimension: 620x148x44mm (Customized Length)
- Cut out size: 610x140x42mm

Ref.	Description	Finish
EADF-GB007	Double Sided Damping Grommet Box	Silver

Cylindrical Table Charging Power Socket



Features

- Material: Aluminium Alloy & Plastic
- Max current: 16A
- Max voltage: 250A
- Power socket: U.K.

Ref.	Description	Finish
EADF-C04	Cylindrical Table Charging Power Socket	Silver, Black

Sliding Socket with Wireless Charging



Features

- Material: Aluminium alloy
- Surface Treatment: Paint
- Size: 350x100x40mm
- Cut out size: 340x72 (R4 chamfer)
- Configuration: 2 power USB Charging on Networks 1 HDMI, 1 Wireless Charger

Ref.	Description	Finish
EADF-W001	Sliding Socket with Wireless Charging	Silver

Aluminium brush cable management



Features

- Material: Aluminium alloy
- Surface Treatment: Brushed or Oxidization
- Thickness: 8mm
- Size: 80x80 / 160x80 / 280x80 / 300x80

Ref.	Description	Finish
EADF-GB001	Aluminum brush cable management	Silver

**Sales Office**

Euro Art (UK) LTD.
69 Staverton Road, London
NW2 5HA

Warehouse

Brittania Mills Didsbury Street
Blackburn Lancashire, BB1 3JL
United Kingdom

T.: +44 1254 433883
M.: +44 787 565 1180
E.: uk@euro-art.co.uk

www.euro-art.co.uk

Middle East, Asia & Africa

Euro Art (Middle East) FZCO
Warehouse ZE4
Jebel Ali Free Zone
Dubai, UAE

T.: +971 4 888 6345
M.: +971 50 297 9761
E.: me@euro-art.co.uk

UAE Distribution Center

Mobility General Trading LLC
Industrial Area, Behind Al Khail
Mall, Al Quoz
Dubai, UAE

T.: +971 4 269 3832
M.: +971 50 811 9561
E.: sc@euro-art.co.uk

Design Centers

Dubai: Airport Road
T.: +971 4 295 1105
M.: +971 54 990 7059
E.: me@euro-art.co.uk

Abu Dhabi: Najda Street
T.: +971 2 564 7111
M.: +971 50 209 9786
E.: ad@euro-art.co.uk

Doha: Barwa Village
T.: +974 4 490 7530
M.: +974 7 733 5728
E.: qatar@euro-art.co.uk